

NYLON CABLE GLAND

Unit:mm



Strain relief design protect cable from breakage / right angle bending

- Material: UL approved NYLON 66, 94V-2. (Black)


Item No.	Mounting HOLE D1	PITCH	D2	B1	L1	L2	L3	Cable Range	Packing
METRIC THREAD									
AG-12SR	12	1.25	8.3	6.0	7.9	12.1	53.3	3~6.5	50pcs
AG-16SR	16	1.5	10.9	9.6	14.4	14.4	74.9	5~10	
AG-20SR	20	1.5	14.8	12.9	12.8	19.5	96.2	10~14	
AG-25SR	25	1.5	18.5	16.5	13.9	19.5	111.2	13~18	25pcs
PG THREAD									
EG-7SR	11.7	=	8.0	6.0	8.0	12.8	53.3	3.5~6	50pcs
EG-9SR	14.3	=	9.9	7.0	8.1	13.9	62.5	4~8	
EG-11SR	17.3	=	13.2	9.6	8.2	15.4	74.9	5~10	
EG-13.5SR	19.3	=	15.2	11.7	8.9	15.8	85.5	6~12	
EG-16SR	21.3	=	17.2	12.9	8.9	17.3	96.2	10~14	25pcs
EG-21SR	27	=	22.4	16.5	10.8	18.6	111.2	13~18	
JIS THREAD									
AGJ-14SR	14	1.5	8.04	6.33	8.07	12.15	53.3	3~6.5	50pcs
AGJ-17SR	17	1.5	10.76	10.25	14.63	14.53	74.9	5~10	
AGJ-21SR	21	1.5	14.98	13.5	12.87	19.6	96.2	10~14	
AGJ-27SR	27	1.5	18.37	18.65	14.66	18.45	111.2	13~18	25pcs

※ EG-SR (WITHOUT WASHER)

NYLON CABLE GLAND



IP68

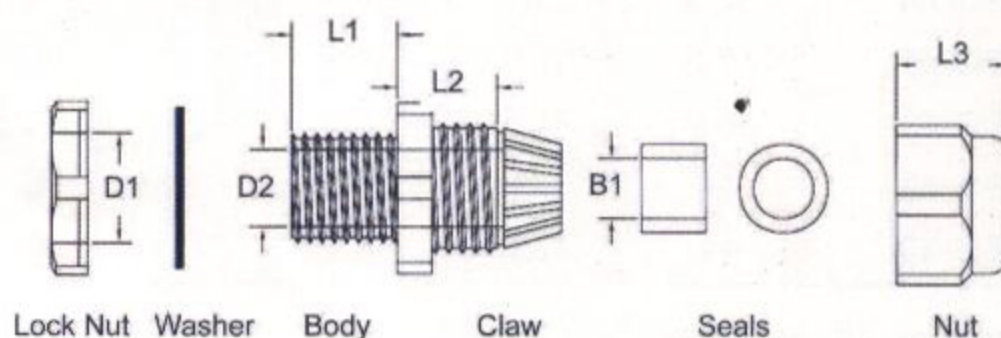

- Material: UL approved NYLON 66, 94V-2. (Black)

METRIC THREAD


Unit:mm

Item No.	Mounting HOLE D1	(mm)	D2	B1	L1	L2	L3	Cable Range	Packing
AG-12	12	1.25	8.3	6.0	7.9	12.1	13.3	3~6.5	50pcs
AG-12L	12		8.3	6.0	7.9	12.1	13.3	3~6.5	
AG-16	16		10.9	9.6	15.7	14.4	16.7	5~10	
AG-20S	20		14.8	12.9	10.0	19.5	18.4	10~14	
AG-20	20		14.8	12.9	15.0	19.5	18.4	10~14	25pcs
AG-25	25		18.6	16.4	15.0	18.7	22.3	13~18	
AG-32	32	1.5	26	23.4	14.7	20.3	26.2	18~25	
AG-40	40		33.0	30.6	17.7	23.4	31.6	22~32	
AG-50	50		41.2	38.2	17.3	25.7	31.6	30~38	10pcs
AG-63	61		54.1	44.0	18.5	27.0	32.6	34~44	
AG-63M	63		54.1	44.0	18.5	27.0	32.6	34~44	
AG-63L	63		56	49.5	25.4	29.5	36.5	42~50	
AG-16F	20.8	PF1/2"	11	13	9.5	14.0	18.7	5~10	50pcs
AG-20F	20.8	14	14.7	14.7	9.5	16.0	18.5	6~13	

JIS THREAD

AGJ-14	14		8.04	6.33	8.07	12.15	13.3	3~6.5	50pcs
AGJ-17	17		10.76	10.25	14.63	14.53	16.7	5~10	
AGJ-21	21	1.5	14.98	13.50	12.87	19.60	18.4	10~14	
AGJ-27	27		18.37	18.65	14.66	18.45	22.3	13~18	
AGJ-34	34		25.84	25.31	14.84	20.75	26.1	18~25	25pcs

NYLON CABLE GLAND

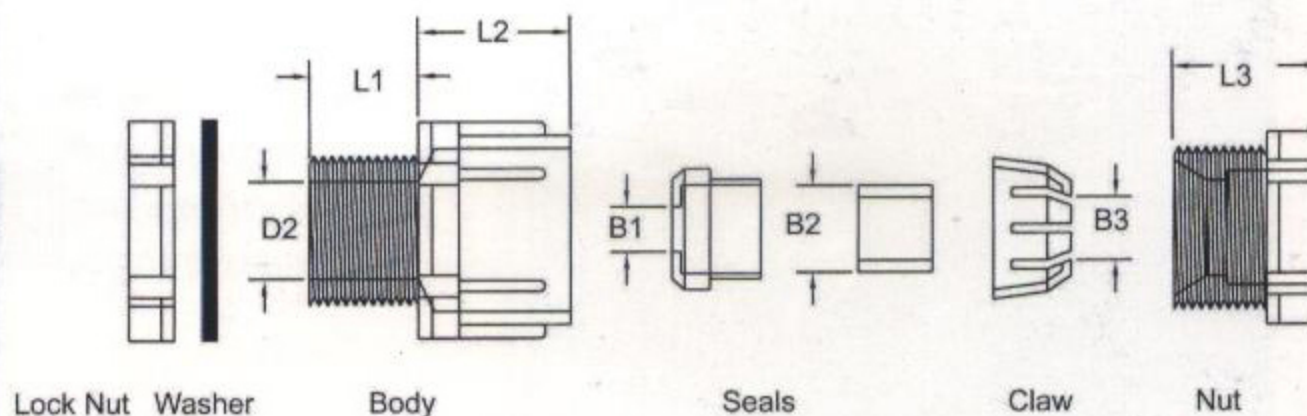

Unit:mm

Item No.	Mounting Hole D1	PITCH	D2	B1	B2	B3	L1	L2	L3	Cable Range	Packing
PG-16	16	1.5	10.5		7	10	12	17	16.5	5~10	50pcs
PG-20	20		13.7		9	13	13	19	19.5	6~13	
PG-25	25		18.5		11	17	13	22	21	10~18	
PG-32	32		25		15	20	15	24.5	24.5	16~22	25pcs
PG-40	40		32	22	27	31	21	26.5	27.5	20~27	10pcs
PG-50	50		41.5	32	36	41	23	30	31	30~41	
PG-63	63		53.2	43	43	51	25	33	33	40~53	

● Material: UL approved NYLON 66, 94V-2 (Black)

● Well designed for insulation, waterproof and impact resistant. Used extensively for protection and fixation of cables in controll panel and apparatus.

● Application:


1. Mount body to pre-drilled panel hole and fix it with locking nut.

2. Insert cables through body and then seals consequently. Finally, Press them together with press nut to hold cable in position.

NYLON CABLE GLAND (WITH STRAIN RELIEF)




● Material: UL approved NYLON 66, 94V-2 (Black)

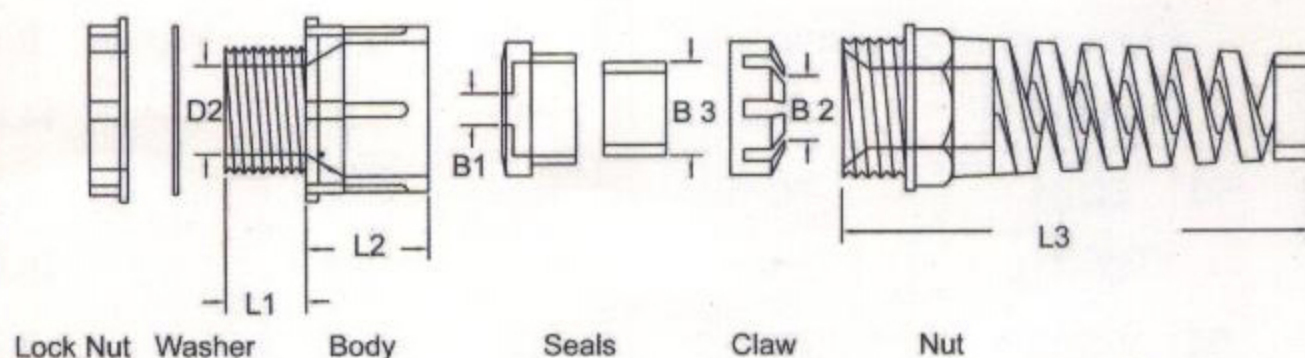

Unit:mm

Item No.	Mounting Hole D1	D2	Pitch	B1	B2	B3	L1	L2	L3	Cable Range	Packing
PG-1610	16	10.9	1.5	4.8	7	10	12	17	62	5~10	50pcs
PG-2013	20	14.1		5.1	9	13	13	19	78	6~13	

NYLON CABLE GLAND

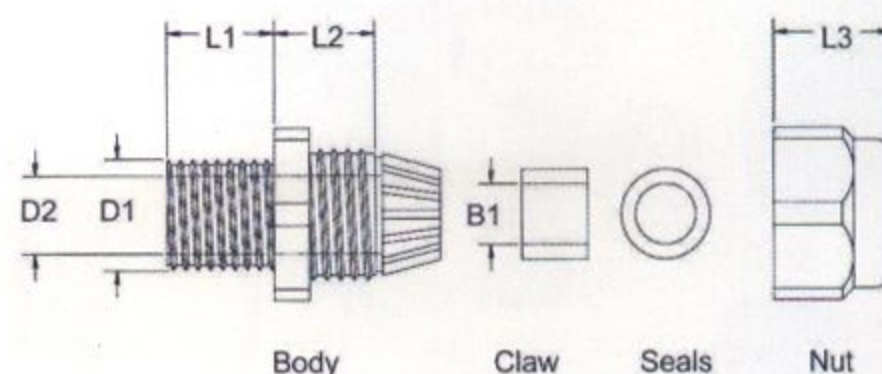



NPT THREAD

※ Available for Lock Nut and washer upon request

Unit:mm

Item No.	D1	NPT Thread	D2	B1	L1	L2	L3	Cable Range	Packing
NPT-14	13.2	NPT 1/4"	8.3	6	7.6	12.7	13.2	3-6.5	25pcs
NPT-38	16.4	NPT 3/8"	10.7	9	14.6	13.7	16.8	5-10	
NPT-12	20.7	NPT 1/2"	14.9	12.7	12.5	18.8	18.4	10-14	
NPT-34	25.6	NPT 3/4"	18.5	16.5	14.6	17.8	22.3	13-18	
NPT-1	33	NPT 1"	26	23.7	14.7	20.6	27.2	18-25	25pcs
NPT-114	41.7	NPT 1 1/4"	32	29	17.9	22.4	31.4	22-32	10pcs

● Material: UL approved NYLON 66, 94V-2 (Black)

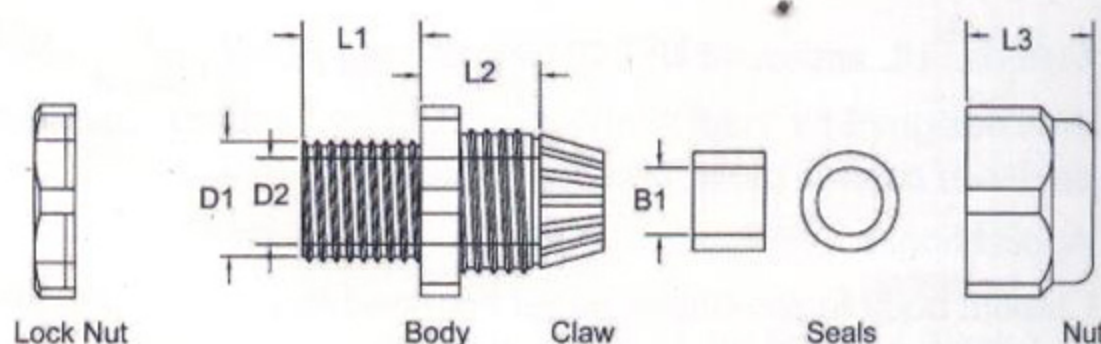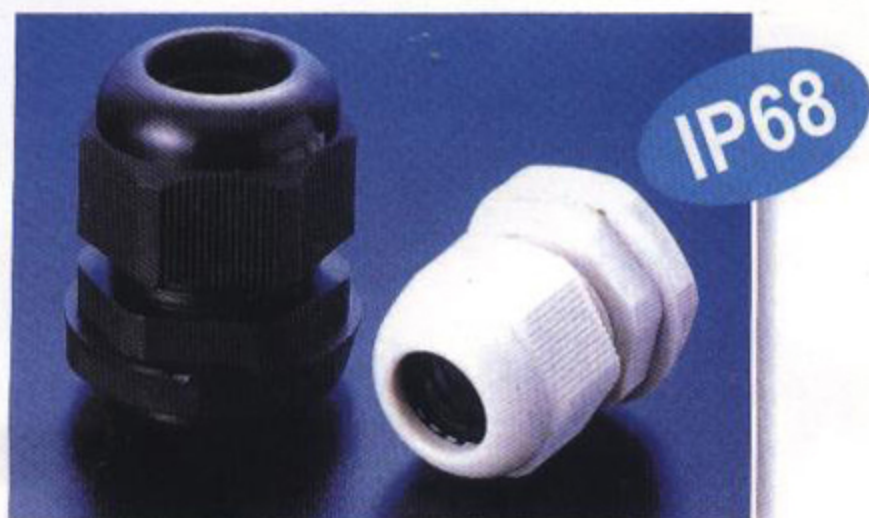

PG THREAD (DIN STANDARD) WITHOUT WASHER

Unit:mm

Item No.	PG THREAD	D1	D2	B1	L1	L2	L3	Cable Range	Packing
EG-7	PG-7	12.1	8.0	6.0	8.0	12.8	13.4	3.5~6	50 pcs
EG-7LS	PG-7	SMALLER	8.0	6.0	8.0	12.8	13.4	3.5~6	
EG-9	PG-9	14.3	9.9	7.0	8.1	13.9	15.2	4~8	
EG-9L	PG-9		9.9	7.0	14.67	13.9	15.2	4~8	
W EG-11	PG-11	18.23	13.2	9.6	8.2	15.4	18.3	5~10	25 pcs
EG-11L	PG-11		13.2	9.6	14.85	15.4	18.3	5~10	
W EG-13.5	PG-13.5	19.9	15.2	11.7	8.9	15.8	18.9	6~12	
EG-13.5L	PG-13.5		15.2	11.7	15.63	15.8	18.9	6~12	
W EG-16	PG-16	22.1	17.2	12.9	8.9	17.3	19.7	10~14	10 pcs
W EG-21	PG-21	27.5	22.4	16.5	10.8	18.6	23.9	13~18	
W EG-29	PG-29	36.2	30.6	23.3	10.9	20.5	27.4	18~25	
W EG-36	PG-36	46.7	35.2	33.3	14.4	24.4	30.5	22~32	
EG-42	PG-42	52.2	39.3	39.6	14.6	25.4	31.6	30~38	10 pcs
EG-48	PG-48	57.6	45.4	45.1	15.8	25.2	31.3	34~44	