



WIRING DUCT (OPEN SLOT)

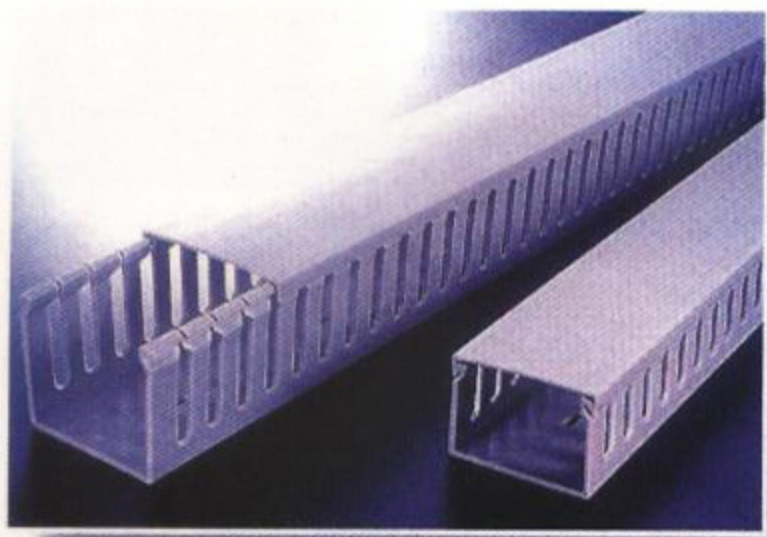


MD

SLOT : 8mm

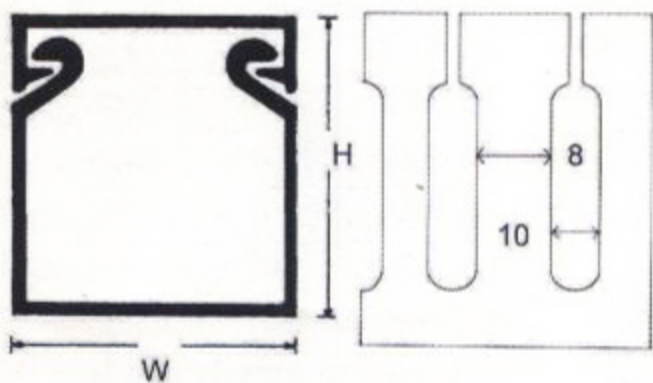

KD


SLOT : 6mm

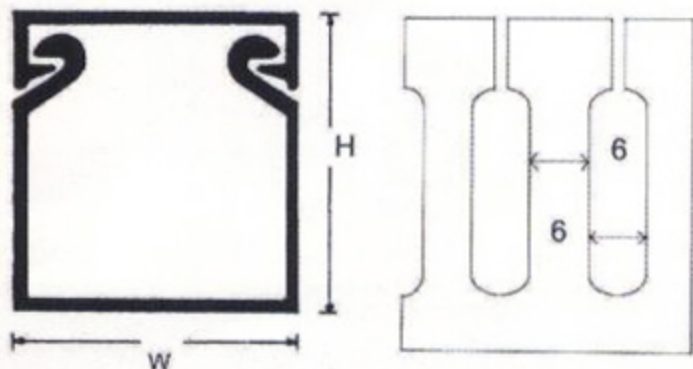

HD

SLOT : 4mm

■ AVAILABLE AT 6mm SLOT UPON REQUEST. UP TO 60 × 60 mm.

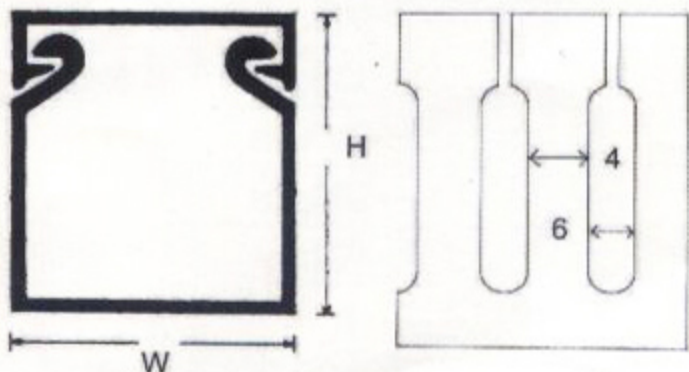

SLOT: 8mm for all applicable size except MD-6.5 MD-6.7, MD-8 in 10mm. (100mm in high)

- Material: High impact, self-extinguishing, warp-proof PVC (Polyvinyl chloride)
- Color: Grey.
- Maximum service temperature: 85°C
- Test to UL file E97527 up to 50°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request of reasonable quantity.


Unit:mm

Item No.			Dimension W×H	Wires to be Contained	Length
SLOT 8mm	SLOT 6mm	SLOT 4mm			
MD-0.5L		HD-0.5L	15 × 25	5~12pcs	
MD-0.7L		HD-0.7L	20 × 20	5~12pcs	
MD-0L		HD-0L	25 × 25	10~25pcs	
MD-1L	KD-1L	HD-1L	25 × 45	20~25pcs	
MD-1.1L		HD-1.1L	30 × 30	15~25pcs	
MD-1.2L	KD-1.2L	HD-1.2L	33 × 33	25~45pcs	
MD-1.5L	KD-1.5L	HD-1.5L	33 × 45	40~55pcs	
MD-2L	KD-2L	HD-2L	45 × 45	60~70pcs	
MD-2.2L		HD-2.2L	50 × 50	80~90pcs	
MD-2.5L	KD-2.5L	HD-2.5L	65 × 45	110~120pcs	
MD-3L	KD-3L	HD-3L	33 × 65	60~75pcs	
MD-4L	KD-4L	HD-4L	25 × 65	40~45pcs	
MD-5L	KD-5L	HD-5L	45 × 65	110~120pcs	
MD-5.5L	KD-5.5L	HD-5.5L	60 × 60	120~135pcs	
MD-5.7L	KD-5.7L	HD-5.7L	65 × 65	180~200pcs	
MD-6L			72 × 64	200~220pcs	
MD-6.5L			33 × 100	180~200pcs	
MD-6.6L			37.5 × 100	180~200pcs	
MD-6.7L	KD-6.7L		48 × 100	215~250pcs	
MD-6.8L			55 × 100	220~260pcs	2M
MD-6.9L			75 × 75	200~250pcs	
MD-7L			70 × 100	250~300pcs	
MD-7.1L			75 × 100	260~320pcs	
MD-7.2L			100 × 50	200~250pcs	
MD-7.5L			100 × 75	260~320pcs	
MD-8L		HD-8L	100 × 100	300~400pcs	
MD-9L			120 × 75	280~380pcs	
MD-10L			150 × 75	335~500pcs	
MD-12L			150 × 100	450~600pcs	
MD-15L			200 × 100	600~800pcs	
MD-21L			200 × 150	1040~1200pcs	
MD-22L			200 × 200	1200~1600pcs	
MD-30L			300 × 100	1040~1200pcs	

FIXING SLOT


For width :

25mm , 33mm , 40mm , 45mm ,
50mm , 60mm , 65mm

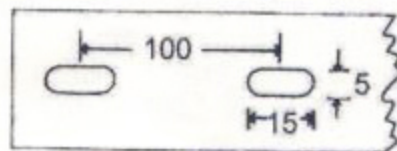


For width :

72mm , 80mm , 100mm , 150mm
200mm

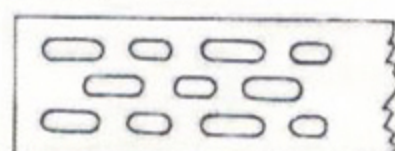


■ AVAILABLE AT 50mm SLOT UPON REQUEST.


WIRING DUCT (OPEN SLOT)

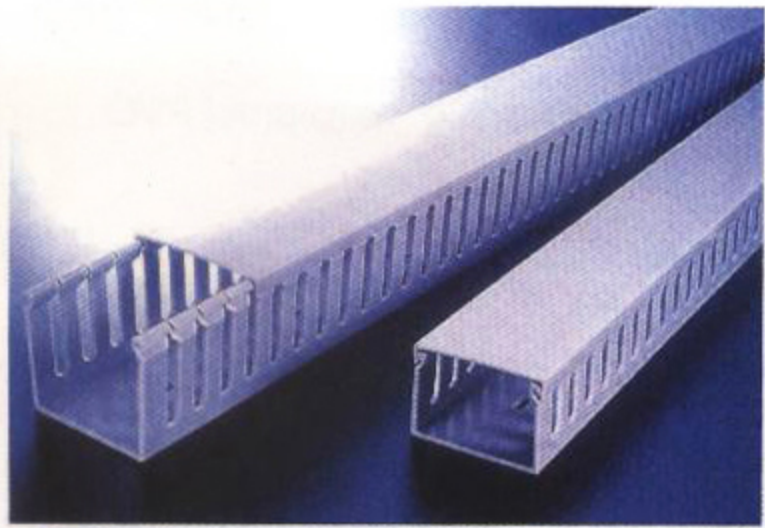

VD SLOT : 8mm

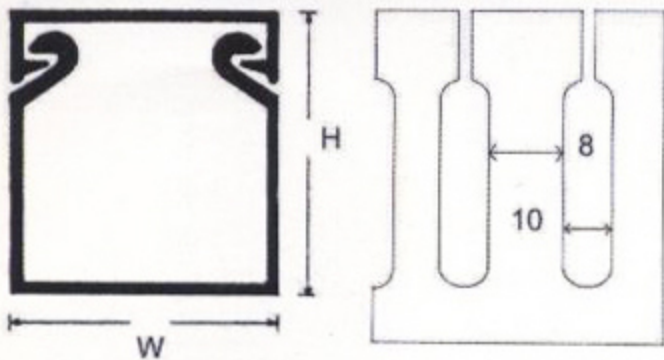


HVD SLOT : 4mm

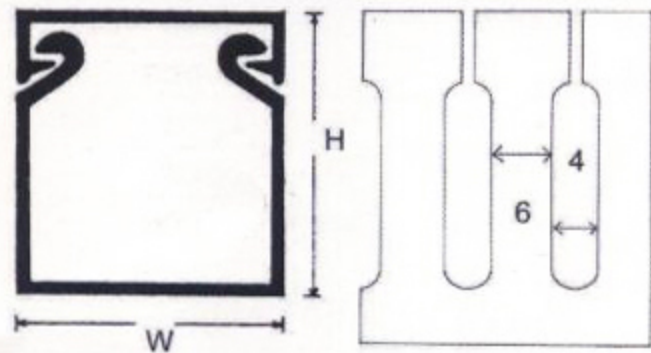


	Item No.			W×H	Wires to be Contained	Length
	SLOT 8mm	SLOT 6mm	SLOT 4mm			
91	VD-1		HVD-1	25 × 30	15~25pcs	2M
	VD-1.5		HVD-1.5	30 × 30	15~25pcs	
91	VD-2		HVD-2	25 × 40	20~25pcs	
91	VD-3		HVD-3	33 × 40	40~45pcs	
91	VD-4	KVD-4	HVD-4	40 × 40	60~70pcs	
91	VD-5		HVD-5	60 × 40	100~115pcs	
91	VD-5.5		HVD-5.5	80 × 40	120~135pcs	
91	VD-5.7		HVD-5.7	100 × 40	130~175pcs	
91	VD-6		HVD-6	25 × 60	40~45pcs	
91	VD-7	KVD-7	HVD-7	40 × 60	100~115pcs	
91	VD-8	KVD-8	HVD-8	60 × 60	120~135pcs	
91	VD-9		HVD-9	80 × 60	180~210pcs	
91	VD-9.5		HVD-9.5	100 × 60	240~290pcs	
91	VD-9.6		HVD-9.6	120 × 60	240~290pcs	
91	VD-9.65		HVD-9.65	120 × 65	260~360pcs	
91	VD-9.66		HVD-9.66	25 × 80	100~120pcs	
91	VD-9.7		HVD-9.7	40 × 80	120~135pcs	
91	VD-9.8		HVD-9.8	60 × 80	180~210pcs	
91	VD-10		HVD-10	80 × 80	240~290pcs	
91	VD-10.5		HVD-10.5	100 × 80	260~350pcs	
91	VD-11		HVD-11	120 × 80	300~400pcs	
91	VD-12		HVD-12	40 × 100	130~175pcs	
	VD-13		HVD-13	60 × 100	240~290pcs	
	VD-14		HVD-14	80 × 100	260~350pcs	



WIRING DUCT (CLOSE SLOT)

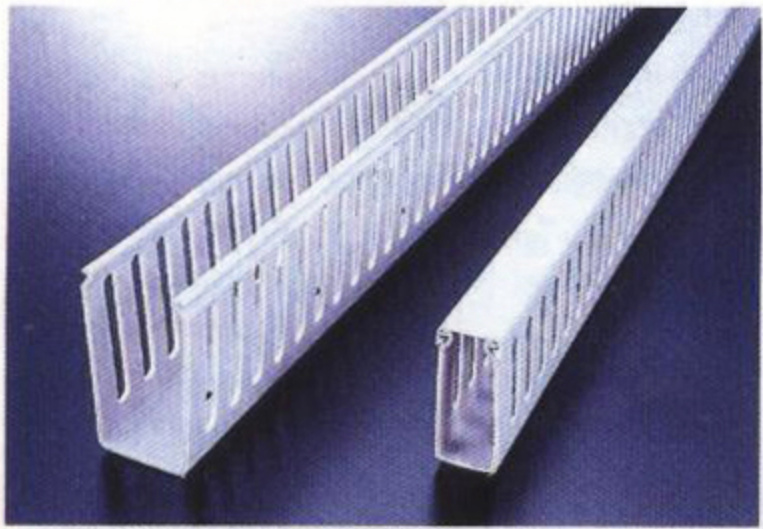

VDC SLOT : 8mm


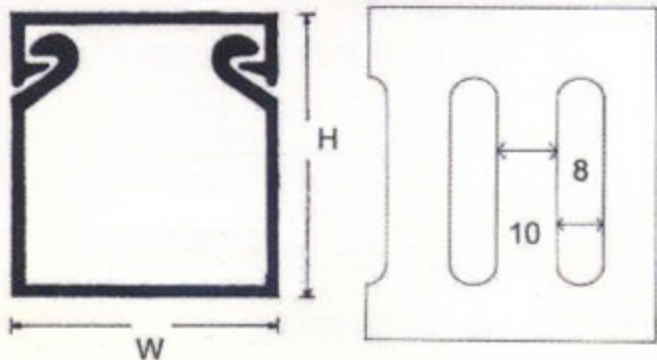


Unit:mm

Item No.	W×H	Wires to be Contained	Length
SLOT 8mm			
VDC-2530	25 × 30	15~25pcs	2M
VDC-2560	25 × 60	40~45pcs	
VDC-4040	40 × 40	60~70pcs	
VDC-4060	40 × 60	100~115pcs	
VDC-4080	40 × 80	120~135pcs	
VDC-5050	50 × 50	80~90pcs	
VDC-6060	60 × 60	120~135pcs	
VDC-6080	60 × 80	180~210pcs	
VDC-8080	80 × 80	240~290pcs	
VDC-100100	100 × 100	300~400pcs	

- Close slot design facilitate easy installation or removal of cover.
- Cut optionally wherever wire insertion/extension is necessary.

WIRING DUCT (SOLID)

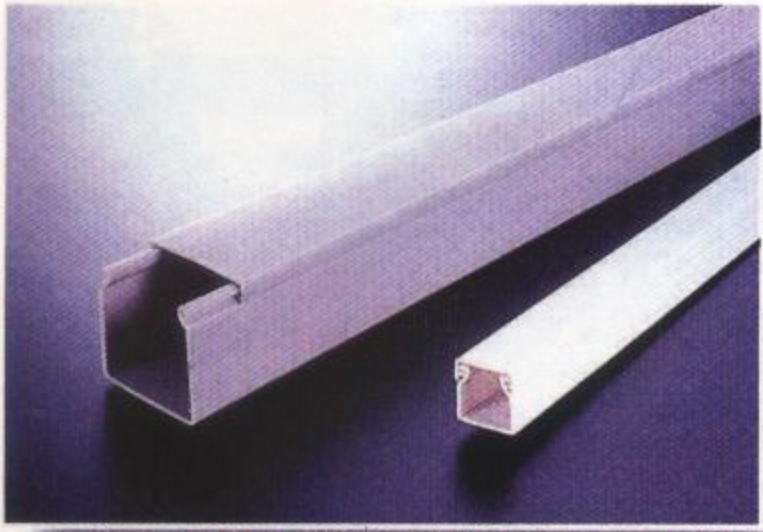

SOLID:


No slot design, for external wiring or where wire extraction is not necessary.

- Material: High impact, self-extinguishing, warp-proof PVC
- Color: Grey.
- Maximum service temperature: 85°C
- Test to UL file E97527 up to 50°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request at reasonable quantity.


Connectors	Type	Item No.	Used With	Packing
	MID-WAY CONNECTOR	SDM-1616	SD-1616	20pcs
		SDM-2516	SD-2516	
		SDM-3816	SD-3816	
		SDM-4040	SD-4040	
		SDM-5050	SD-5050	
		SDM-7575	SD-7575	
	OUTSIDE CORNOR	SDO-1616	SD-1616	
		SDO-2516	SD-2516	
		SDO-3816	SD-3816	
		SDO-4040	SD-4040	
		SDO-5050	SD-5050	
		SDO-7575	SD-7575	
	"T" TYPE	SDT-1616	SD-1616	
		SDT-2516	SD-2516	
		SDT-3816	SD-3816	
		SDT-4040	SD-4040	
		SDT-5050	SD-5050	
		SDT-7575	SD-7575	
	"L" TYPE	SDL-1616	SD-1616	
		SDL-2516	SD-2516	
		SDL-3816	SD-3816	
		SDL-4040	SD-4040	
		SDL-5050	SD-5050	
		SDL-7575	SD-7575	
	INSIDE CORNOR	SDI-1616	SD-1616	
		SDI-2516	SD-2516	
		SDI-3816	SD-3816	
		SDI-4040	SD-4040	
		SDI-5050	SD-5050	
		SDI-7575	SD-7575	
	END PIECE	SDE-1616	SD-1616	
		SDE-2516	SD-2516	
		SDE-3816	SD-3816	
		SDE-4040	SD-4040	
		SDE-5050	SD-5050	
		SDE-7575	SD-7575	

	Item No.	W×H	Wires to be Contained	Length
RJ	SD-2210	22×10	3~8pcs	2M
	SD-3015	30×15	10~25pcs	
	SD-1616	16×16	3~10pcs	
	SD-2516	25×16	5~12pcs	
	SD-3816	38×16	12~30pcs	
	SD-2020	20×20	5~12pcs	
	SD-4020	40×20	20~40pcs	
RJ	SD-1525	15×25	5~12pcs	
	SD-2525	25×25	10~25pcs	
	SD-3825	38×25	20~40pcs	
	SD-5025	50×25	25~45pcs	
	SD-2530	25×30	15~25pcs	
	SD-3030	30×30	20~40pcs	
	SD-3333	33×33	25~45pcs	
RJ	SD-10030	100×30	130~160pcs	
	SD-10033	100×33	180~200pcs	
	SD-3838	38×38	45~50pcs	
	SD-2540	25×40	20~25pcs	
	SD-3340	33×40	40~45pcs	
	SD-4040	40×40	60~70pcs	
	SD-6040	60×40	100~115pcs	
RJ	SD-7540	75×40	120~135pcs	
	SD-8040	80×40	120~135pcs	
	SD-10040	100×40	180~200pcs	
	SD-2545	25×45	20~25pcs	
	SD-3345	33×45	40~55pcs	
	SD-4545	45×45	60~70pcs	
	SD-6545	65×45	110~120pcs	
RJ	SD-2550	25×50	20~30pcs	
	SD-3850	38×50	20~35pcs	
	SD-5050	50×50	80~90pcs	
	SD-7550	75×50	180~200pcs	
	SD-8050	80×50	180~200pcs	
	SD-10050	100×50	200~250pcs	
	SD-2560	25×60	40~45pcs	
RJ	SD-4060	40×60	100~115pcs	
	SD-6060	60×60	120~135pcs	
	SD-8060	80×60	180~210pcs	
	SD-10060	100×60	240~290pcs	
	SD-12060	120×60	240~290pcs	
	SD-7264	72×64	200~220pcs	
	SD-2565	25×65	40~45pcs	
RJ	SD-3365	33×65	60~75pcs	
	SD-4565	45×65	110~120pcs	
	SD-6565	65×65	180~200pcs	
	SD-12065	120×65	260~350pcs	
	SD-2575	25×75	50~55pcs	
	SD-37.575	37.5×75	110~115pcs	
	SD-5075	50×75	180~200pcs	
RJ	SD-7575	75×75	200~250pcs	
	SD-10075	100×75	260~320pcs	
	SD-12075	125×75	280~380pcs	
	SD-12575	120×75	280~380pcs	
	SD-15075	150×75	335~500pcs	
	SD-2580	25×80	60~75pcs	
	SD-4080	40×80	120~135pcs	
RJ	SD-6080	60×80	180~210pcs	
	SD-8080	80×80	240~290pcs	
	SD-10080	100×80	260~350pcs	
	SD-12080	120×80	300~400pcs	
	SD-33100	33×100	180~200pcs	
	SD-37.5100	37.5×100	180~200pcs	
	SD-40100	40×100	130~175pcs	
RJ	SD-48100	48×100	215~250pcs	
	SD-50100	50×100	210~260pcs	
	SD-55100	55×100	220~260pcs	
	SD-60100	60×100	240~290pcs	
	SD-70100	70×100	250~300pcs	
	SD-75100	75×100	260~300pcs	
	SD-80100	80×100	260~350pcs	
RJ	SD-100100	100×100	300~400pcs	
	SD-150100	150×100	450~600pcs	
	SD-200100	200×100	600~800pcs	
	SD-200150	200×150	1040~1200pcs	
	SD-200200	200×200	1200~1600pcs	
	SD-300100	300×100	1040~1400pcs	

DECORATION WIRING DUCT

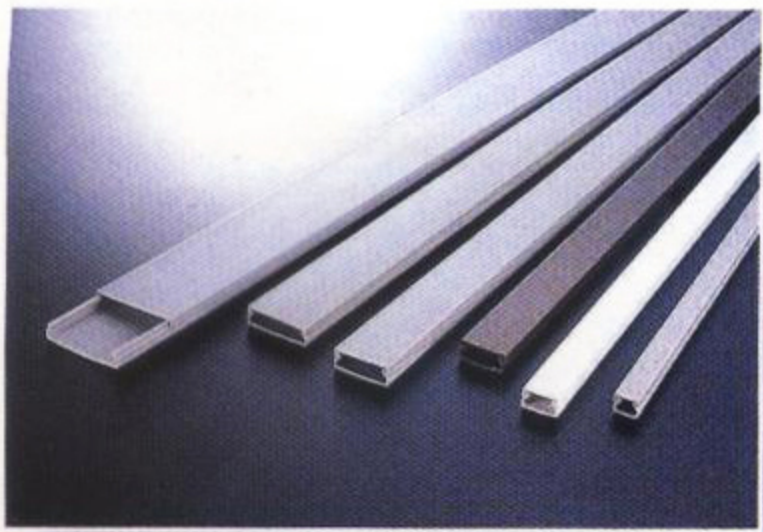

- Material: Rigid, self-extinguishing PVC
- Standard Color: Grey.
- Feature: All sizes feature same height in 11mm which were specially designed for flat cables.
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.

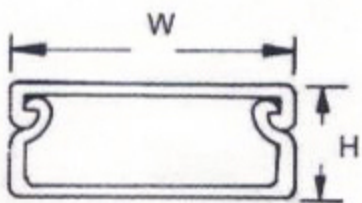


Unit:mm

Item No.	W	H	Wire to be Contained	Length
TF-1	12.7 (1/2")	11	1-4	2M
TF-2	19.0 (3/4")	11	2-6	
TF-3	25.4 (1")	11	5-9	
TF-4	31.8 (1 1/4")	11	6-12	
TF-5	38.1 (1 1/2")	11	10-18	
TF-6	50.8 (2")	11	15-25	
TF-11	12.7 (1/2")	11	1-4	1M BN:Brown DB:Coffee WE:White MW:Milk (Light Brown) LX:light grained DX:dark grained
TF-11BN				
TF-11DB				
TF-11WE				
TF-11MW				
TF-11LX				
TF-11DX				
TF-21	19.0 (3/4")	11	2-6	
TF-21BN				
TF-21DB				
TF-21WE				
TF-21WM				
TF-21LX				
TF-21DX				
TF-31	25.4 (1")	11	5-9	
TF-31BN				
TF-31DB				
TF-31WE				
TF-31MW				
TF-31LX				
TF-31DX				
TF-41	31.8 (1 1/4")	11	6-12	
TF-51	38.1 (1 1/2")	11	10-18	
TF-61	50.8 (2")	11	15-25	

BN:Brown
DB:Coffee
WE:White
MW:Milk
(Light Brown)
LX:light grained
DX:dark grained

DECORATION WIRING DUCT CONNECTOR

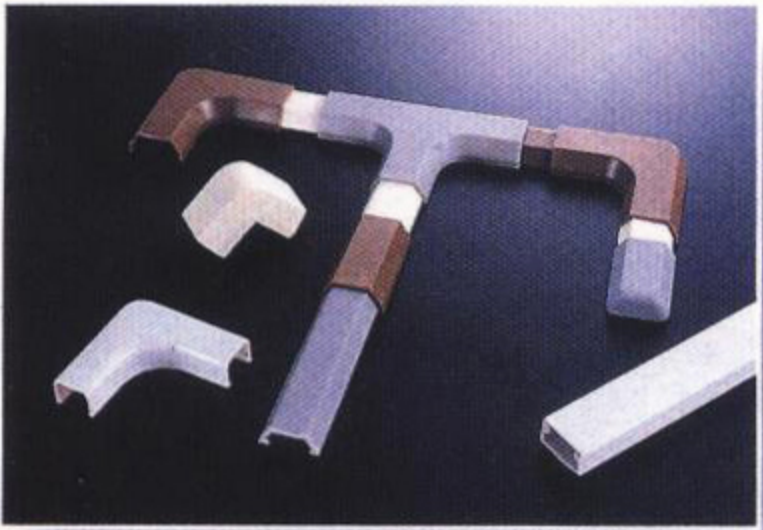


- Material: ABS

Connectors	Type	Item No.	Used With	Packing	Standard Color
	MID-WAY CONNECTOR	TFM-1	TF-1	20pcs	Grey For Color Add Code To Item No. i.e. TFT-2MW MW:Milk WE:White BN:Brown DB:Coffee (Light Brown)
		TFM-2	TF-2		
		TFM-3	TF-3		
		TFM-4	TF-4		
	"T" TYPE	TFT-1	TF-1		
		TFT-2	TF-2		
		TFT-3	TF-3		
		TFT-4	TF-4		
	INSIDE CORNOR	TFI-1	TF-1		
		TFI-2	TF-2		
		TFI-3	TF-3		
		TFI-4	TF-4		


Connectors	Type	Item No.	Used With	Packing	Standard Color
	OUTSIDE CORNOR	TFO-1	TF-1	20pcs	Grey For Color Add Code To Item No. i.e. TFT-2MW MW:Milk WE:White BN:Brown DB:Coffee (Light Brown)
		TFO-2	TF-2		
		TFO-3	TF-3		
		TFO-4	TF-4		
	"L" TYPE	TFL-1	TF-1		
		TFL-2	TF-2		
		TFL-3	TF-3		
		TFL-4	TF-4		
	END PIECE	TFE-1	TF-1		
		TFE-2	TF-2		
		TFE-3	TF-3		
		TFE-4	TF-4		

ROUND TYPE WIRING DUCT

Unit:mm

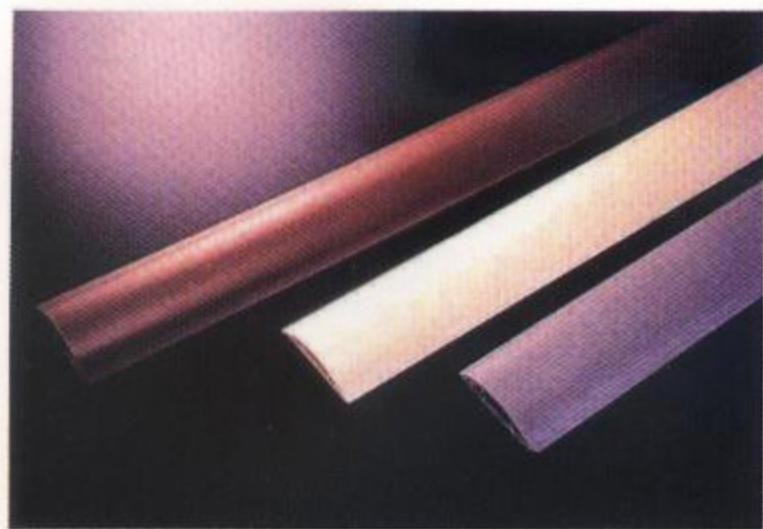

CONNECTOR COVER

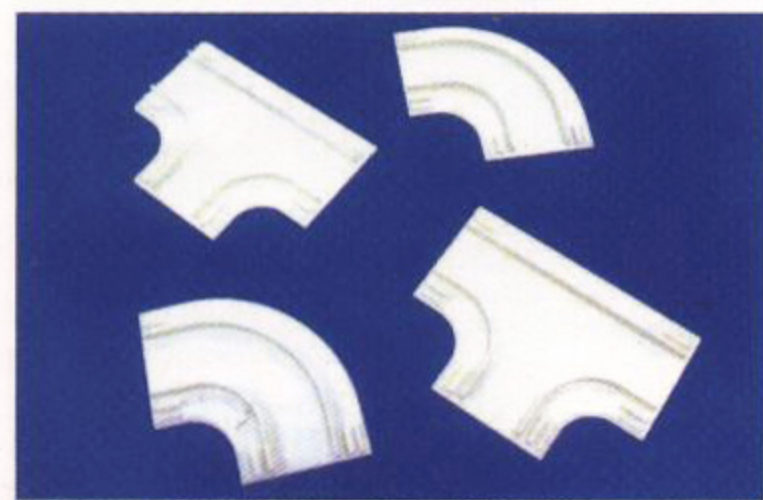

CONNECTOR BASE

- Material: High impact, rigid, self-extinguish PVC
- Maximum service temperature: 85°C
- Color: Grey. (white, milk, brown, dark brown available)
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.




OLD TYPE




NEW TYPE

Item No.	W	H1	H	H1	Length	Connector Item No.	Connector Item No.
RD-20	20	8	6	4	1M With APHESIVE TAPE MW:Milk BN:Brown (Light Brown) LX:light grained DX:dark grained	RDT-20,RDM-20	RBL-20,RBT-20
RD-20BN						RDI-20,RDO-20	
RD-20MW						RDL-20,RDE-20	
RD-20LX							
RD-20DX							
RD-30	30	11	8	6		RDT-30,RDM-30	RBL-30,RBT-30
RD-30BN						RDI-30,RDO-30	
RD-30MW						RDL-30,RDE-30	
RD-30LX							
RD-30DX							
RD-40	40	16	9.5	7		RDT-40,RDM-40	RBL-40,RBT-40
RD-40BN						RDI-40,RDO-40	
RD-40MW						RDL-40,RDE-40	
RD-40LX							
RD-40DX							
RD-50	50	20	11	8		RDT-50,RDM-50	RBL-50,RBT-50
RD-50BN						RDI-50,RDO-50	
RD-50MW						RDL-50,RDE-50	
RD-50LX							
RD-50DX							
RD-60	60	30	13	9		RDT-60,RDM-60	RBL-60,RBT-60
RD-60BN						RDI-60,RDO-60	
RD-60MW						RDL-60,RDE-60	
RD-60LX							
RD-60DX							
RD-70	70	40	15	10		RDT-70,RDM-70	RBL-70,RBT-70
RD-70BN						RDI-70,RDO-70	
RD-70MW						RDL-70,RDE-70	
RD-70LX							
RD-70DX							
RD-90	90	45	19	15		RDT-90,RDM-90	RBL-90,RBT-90
RD-90BN						RDI-90,RDO-90	
RD-90MW						RDL-90,RDE-90	
RD-90LX							
RD-90DX							
RD-120	120	70	25	21		RDT-120,RDM-120	RBL-120,RBT-120
RD-120BN						RDI-120,RDO-120	
RD-120MW						RDL-120,RDE-120	
RD-120LX							
RD-120DX							

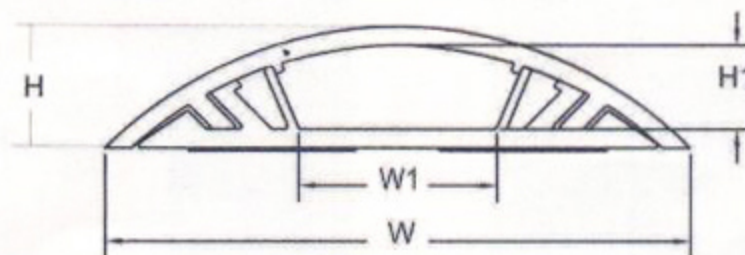

RD-20,30,40,50,60

CONNECTOR COVER TYPE :
 MID-WAY CONNECTOR : RDM-20
 "L" TYPE : RDL-20
 OUTSIDE CORNOR : RDO-20
 INSIDE CORNOR : RDI-20
 "T" TYPE : RDT-20
 END PIECE : RDE-20

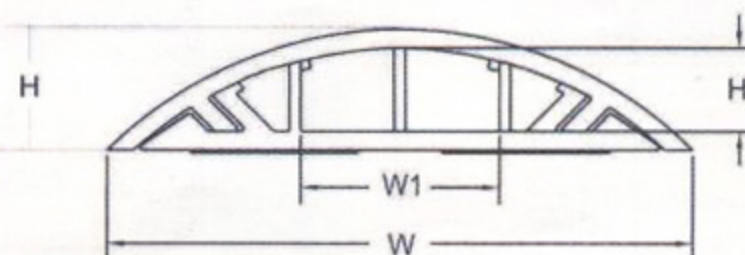


RD-70,90,120

CONNECTOR BASE TYPE :
 "L" TYPE : RBL-60
 "T" TYPE : RBT-60

TELEPHONE WIRING DUCT (SELF-ADHESIVE)

Unit:mm

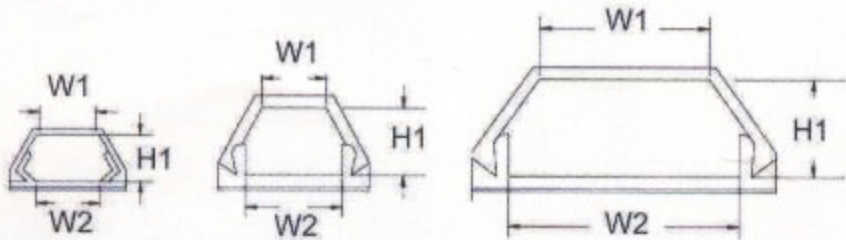

TC-1, 2, 3

TC-1.5, 4, 5, 6

TC-8

- Material: Rigid, self-extinguishing PVC Backed with high quality self-adhesive tape to facilitate wire application.
 - Color: Grey.
 - Length: 1M (2M available upon request)
 - These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- MW:Milk
WE:White
BN:Brown
DB:Coffee
(Light Brown)
LX:light grained
DX:dark grained



Item No.	W1	W2	H1	Wire to be Contained	Length
TC-1	6	7	4	1pcs	
TC-1BN					
TC-1DB					
TC-1WE					
TC-1MW					
TC-1LX					
TC-1DX	6	8	7.4	1~2pcs	
TC-1.5					
TC-1.5BN					
TC-1.5MW					
TC-1.5LX					
TC-1.5DX					
TC-2	8	8	6	2~3pcs	1M
TC-2BN					
TC-2DB					
TC-2WE					
TC-2MW					
TC-2LX					
TC-2DX	10	10	7	3~4pcs	With ADHESIVE TAPE BN:Brown DB:Coffee WE:White MW:Milk (Light Brown) LX:light grained DX:dark grained
TC-3					
TC-3BN					
TC-3DB					
TC-3WE					
TC-3MW					
TC-3LX	12	15	10	4~7pcs	
TC-3DX					
TC-4					
TC-4BN					
TC-4DB					
TC-4WE	10	17	13	7~9pcs	
TC-4MW					
TC-4LX					
TC-4DX					
TC-5					
TC-5BN	11	19	16	10~15pcs	
TC-5DB					
TC-5WE					
TC-5MW					
TC-5LX					
TC-5DX	30	37	16	30~40pcs	
TC-6					
TC-6BN					
TC-6DB					
TC-6WE					
TC-6MW	30	37	16	30~40pcs	
TC-6LX					
TC-6DX					
TC-8					
TC-8BN					
TC-8WE					
TC-8MW	30	37	16	30~40pcs	
TC-8LX					
TC-8DX					
TC-8DX					