



T-8 RECESSED LOUVER

LAMP WATT: 4X40W, 4X30W, 4X20W

FINISH: POWDER COATING WHITE

MATERIAL: 0.4mm POWDER COATING STEEL



T-8 RECESSED LOUVER

LAMP WATT: 3X40W, 3X30W, 3X20W

FINISH: POWDER COATING WHITE

MATERIAL: 0.4mm POWDER COATING STEEL



T-8 RECESSED LOUVER

LAMP WATT: 2X40W, 2X30W, 2X20W

FINISH: POWDER COATING WHITE

MATERIAL: 0.4mm POWDER COATING STEEL



T8 RECESSED WITH PS BOARD

LAMP WATT: 4X20W

FINISH: POWDER COATING WHITE

MATERIAL: 0.4mm POWDER COATING STEEL+PS BOARD

T8 RECESSED WITH PS BOARD

LAMP WATT: 3X20W

FINISH: POWDER COATING WHITE

MATERIAL: 0.4mm POWDER COATING STEEL+ PS BOARD




TYPE A

IP65 FLU. LIGHT FIXTURE (DUSTPROOF, WATERPROOF)

LAMP WATT: T-8 1X20W, 2X20W, 1X40W, 2X40W, 1X58W, 2X58W

MATERIAL:ABS, PS,PC AND PMMA

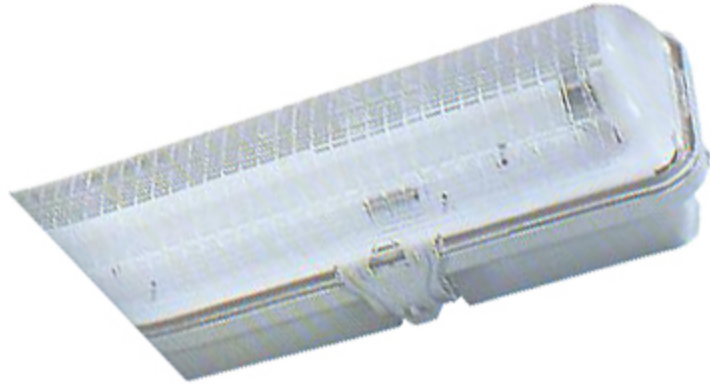


TYPE D



T-8 FLU. LIGHT FIXTURE GENERAL TYPE

LAMP WATT:T-8 2X20W 2X30W 2X40W 2X75W, 2X96W,2X100W

MATERIAL:POWDER COATING HOUSING

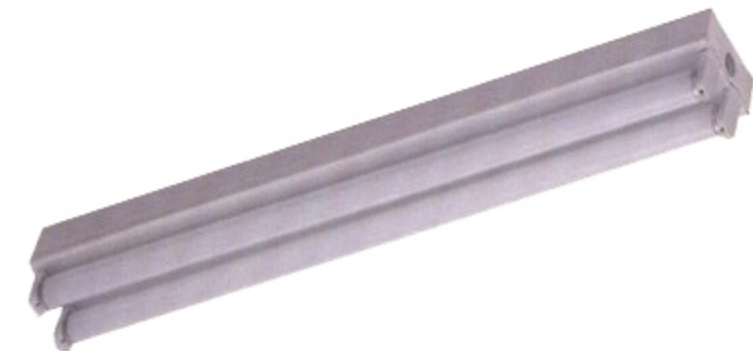

T-8 FLU. LIGHT FIXTURE GENERAL TYPE

LAMP WATT:T-8 2X20W, 2X30W, 2X40W

MATERIAL:POWDER COATING HOUSING



T-8 FLU. LIGHT FIXTURE GENERAL TYPE

LAMP WATT:T-8 1X10W,1X20W, 1X30W, 1X40W

MATERIAL:POWDER COATING HOUSING



CY-715

- Operating Voltage : 220-240V/50Hz
- Max Watt : 2000W
- Lamp : J254mm 2000W/R7S
- Material : Die Casting Aluminium
- Finishes : White,Black
- IP Rating : IP 54




CY-150

- Operating Voltage : 220-240V/50Hz
- Max Watt : 150W
- Lamp : J78mm 150W/R7S
- Material : Die Casting Aluminium
- Finishes : White,Black
- IP Rating : IP 54



CY-500

- Operating Voltage : 220-240V/50Hz
- Max Watt : 500W
- Lamp : J118mm 500W/R7S
- Material : Die Casting Aluminium
- Finishes : White,Black
- IP Rating : IP 54

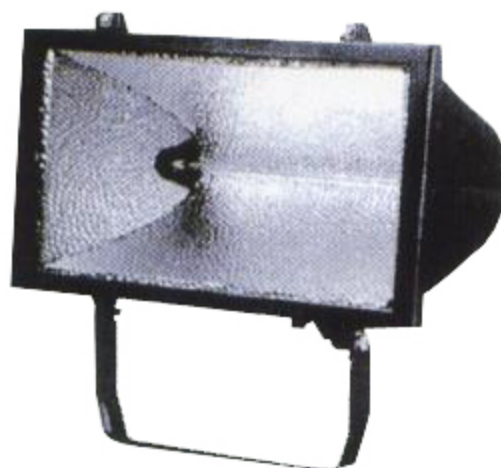

CY-1500

- Operating Voltage : 220-240V/50Hz
- Max Watt : 1500W
- Lamp : J254mm 1500W/R7S
- Material : Die Casting Aluminium
- Finishes : White,Black
- IP Rating : IP 54



CY-701

- Operating Voltage : 220-240V/50HZ
- Max watt : 500W
- Lamp : J118mm 500W/R7S
- Material : Die Casting Aluminium
- Finishes : White,Black
- IP Rating : IP 54



VA16-400

- Ballast : Embedded
- Lamp holder : E40
- Light distribution installation : Symmetrical
- IP Rating : 65
- Max watt : MH/HPS 400W
- Package : 45x42.5x15.7 1PC/CTN



VA02-400

- Ballast : Embedded
- Lamp holder : E40
- Light distribution installation : Symmetrical
- IP Rating : 65
- Max watt : MH/HPS 400W
- Package : 46x41.5x15.7 1PC/CTN



VA09-400

- Ballast : Embedded
- Lamp holder : E40
- Light distribution installation : Symmetrical
- IP Rating : 65
- Max watt : MH/HPS 400W
- Package : 47x44x16.5 1PC/CTN




VB01-150

- Ballast : Embedded
- Lamp holder : R7S
- Light distribution installation : Asymmetrical
- IP Rating : 65
- Max watt : MH/HPS 150W
- Package : 36.5x26x11 1PC/CTN



VB06-150

- Ballast : Embedded
- Lamp holder : R7S
- Light distribution installation : Asymmetrical
- IP Rating : 65
- Max watt : MH/HPS 150W
- Package : 43x38x15 1PC/CTN

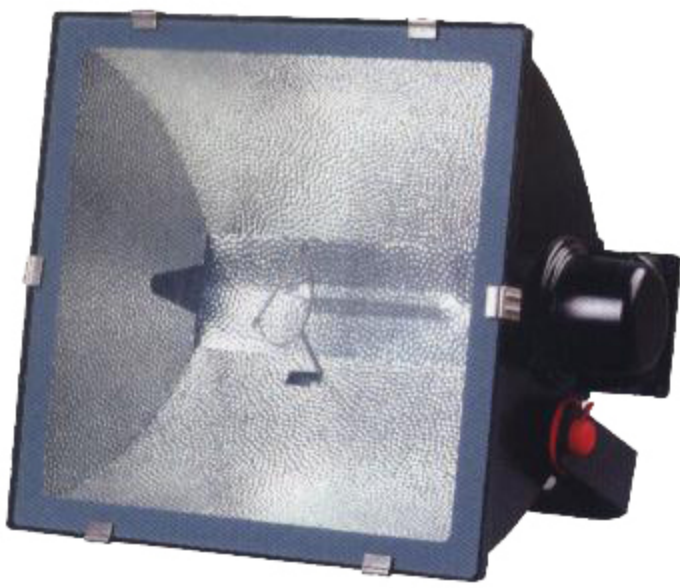

VC01-2000

- Matching RS-K-01/02 Gear Box
- Ballast : Outward
- Lamp holder : E40
- IP Rating : 65
- Max watt : MH/HPS 2000W
- Package : 61.5x53.5x32.5 1PC/CTN



VE03-400

- Ballast : Embedded
- Lamp holder : E40
- Addable PC lower lid
- Max watt : MH/HPS 400W



VE10-400

- Ballast : Embedded
- Lamp holder : E40
- Addable 5mm thick heat-resistant toughened glass cover
- IP Rating : 54
- Max watt : MH/HPS 400W



VG02-250

- Ballast : Embedded
- Lamp holder : E40
- IP Rating : 65
- Caliber of the lamp pole : 52mm
- Max watt : MH/HPS 250W
- Package : 67x30x19 TPC/CTN



VG04-250

- Ballast : Embedded
- Lamp holder : E40
- IP Rating : 65
- Caliber of the lamp pole : 60mm
- Max watt : MH/HPS 250W
- Package : 67x33.5x18 TPC/CTN(body)
38.5x32x41 8PCS/CTN(diffuser)