


TERRMINAL & WIRE ASSEMBLY

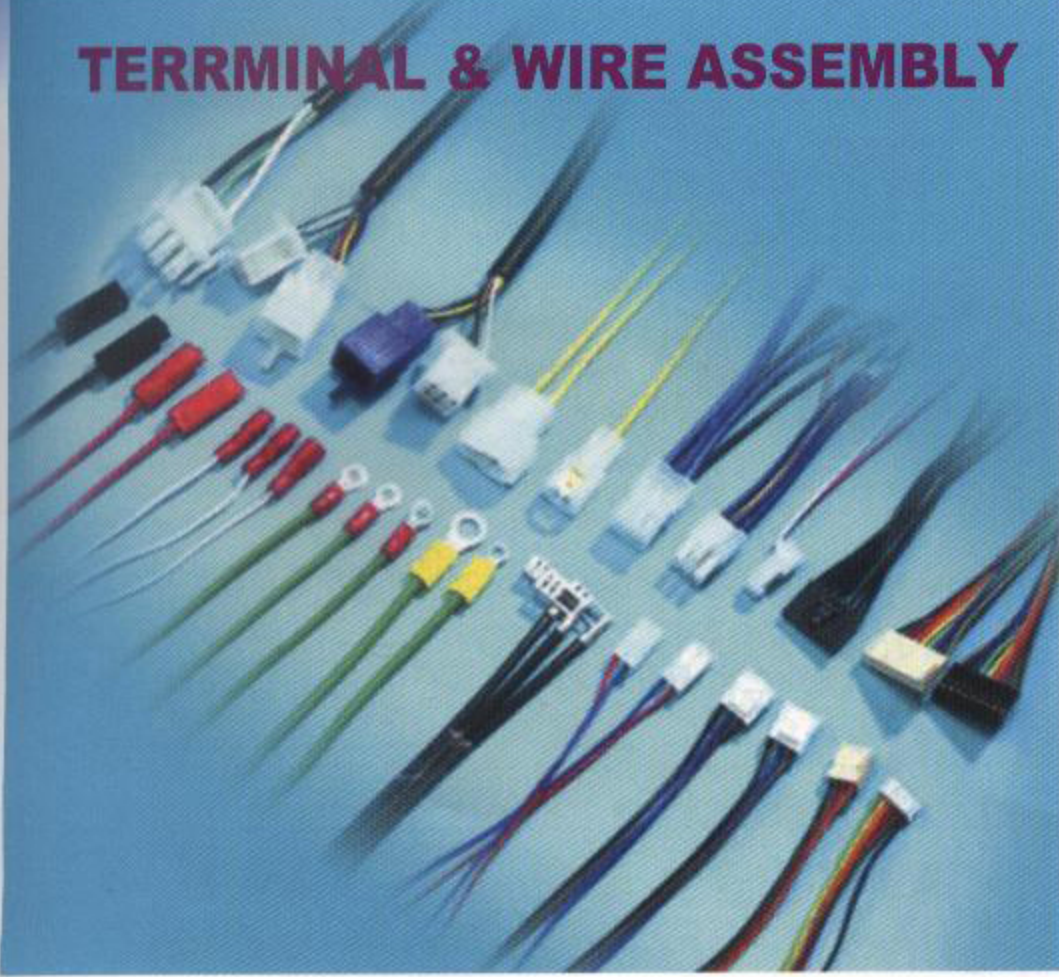

JD-8003

9" CRIMPING TOOL
WITH INSULATED TERMINALS
48PCS, 60PCS, 100PCS

CRIMPING TOOLS

RYO-10

TERMINAL CRIMPING TOOL



Non insulated terminal range: 1.25, 2, 3.5, 5.5, 8 mm².
Copper tube terminal range: 1.5, 2.5, 4, 6, 10 mm².
Length: 225 mm Weight: 0.55 kgs

RYO-05H

COAX CRIMPING TOOL



8.1 mm	6.5 mm	5.4 mm		2.6 mm	1.72 mm
55, 58, 59, 62, 5, 6, 21, 140, 141, 142, 143, 210, 212, 222, 223, 303, 304, 400, BELDEN 8279, 8281, 9231, 9141					

Length: 236 mm

Weight: 0.56 kgs

RYO-056

INSULATED TERMINAL CRIMPING TOOL



Insulated terminal range: 0.5-1 mm² (22-18 AWG).
1.5-2.5 mm² (16-14 AWG), 4-6 mm² (12-10 AWG).
Length: 225 mm Weight: 0.55 kgs

RCE-056

CORD END TERMINAL CRIMPING TOOL



Cord end terminal range: 0.5-0.75 mm² (22-20 AWG).
1 mm² (18 AWG), 1.5 mm² (16 AWG), 2.5 mm² (14 AWG),
4 mm² (12 AWG), 6 mm² (10 AWG).
Length: 225 mm Weight: 0.55 kgs

RYO-B056

OPEN BARREL TERMINAL CRIMPING TOOL



Open barrel terminal range: 0.5-1 mm² (22-18 AWG).
1.5-2.5 mm² (16-14 AWG), 4-6 mm² (12-10 AWG).
Length: 225 mm Weight: 0.55 kgs

RCE-416

CORD END TERMINAL CRIMPING TOOL



Cord end terminal range: 4 mm² (12 AWG), 6 mm²
(10 AWG), 10 mm² (8 AWG), 16 mm² (6 AWG).
Length: 225 mm Weight: 0.55 kgs

CRIMPING TOOLS

RYO-2

TERMINAL CRIMPING TOOL



Non insulated terminal range: 1.25, 2 mm².
Copper tube terminal range: 1.5, 2.5 mm².
Length: 200 mm Weight: 0.23 kgs

RYO-8

TERMINAL CRIMPING TOOL



Non insulated terminal range: 1.25, 2, 3.5, 5.5, 8 mm².
Copper tube terminal range: 1.5, 2.5, 4, 6, 10 mm².
Length: 270 mm Weight: 0.48 kgs

RYO-14

TERMINAL CRIMPING TOOL



Non insulated terminal range: 1.25, 2, 3.5, 5.5, 8, 14 mm².
Copper tube terminal range: 1.5, 2.5, 4, 6, 10, 16 mm².
Length: 298 mm Weight: 0.52 kgs

RYO-25

TERMINAL CRIMPING TOOL



Non insulated terminal range: 5.5, 8, 14, 22 mm².
Copper tube terminal range: 6, 10, 16, 25, 35 mm².
Length: 354 mm Weight: 0.78 kgs

RYO-120

TERMINAL CRIMPING TOOL



Heavy duty crimping tool for copper tube terminal from 10 to 120 mm² with non-ratchet screw adjustment.
Non insulated terminal range: 8, 14, 22, 38, 60, 70, 80, 100 mm².
Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95, 120 mm².
Length: 573 mm Weight: 2.78 kgs

RYO-150

TERMINAL CRIMPING TOOL



Heavy duty crimping tool for copper tube terminal from 10 to 150 mm² with non-ratchet screw adjustment.
Non insulated terminal range: 8, 14, 22, 38, 60, 70, 80, 100, 125, 150 mm².
Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95, 120, 150 mm².
Length: 670 mm Weight: 3.9 kgs

CT-38


TERMINAL CRIMPING TOOL



Non insulated terminal range: 8, 14, 22, 38 mm².
Copper tube terminal range: 10, 16, 25, 35, 50 mm².
Length: 575 mm Weight: 3.3 kgs

CT-80

TERMINAL CRIMPING TOOL

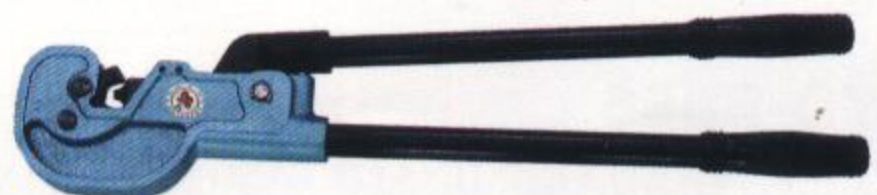

Non insulated terminal range: 14, 22, 38, 60, 70, 80 mm².
Copper tube terminal range: 16, 25, 35, 50, 70, 95 mm².
Length: 660 mm Weight: 4.34 kgs

CT-100

TERMINAL CRIMPING TOOL



Non insulated terminal range: 22, 38, 60, 70, 80, 100 mm².


Copper tube terminal range: 25, 35, 50, 70, 95 120 mm².

Length: 660 mm

Weight: 4.34 kgs

K-120

TERMINAL HEXAGONAL CRIMPING TOOL

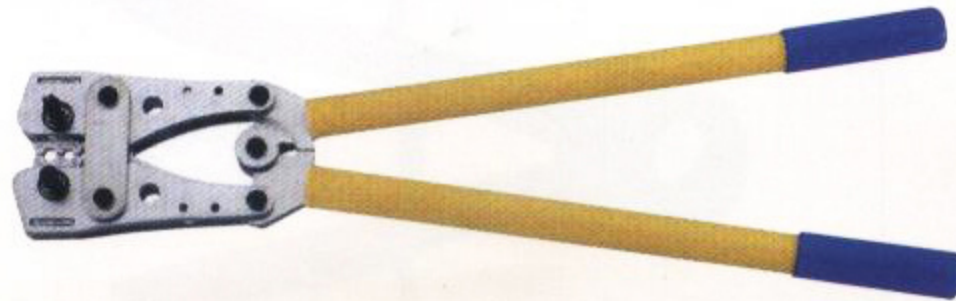

Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95 120 mm².

Length: 650 mm

Weight: 3.64 kgs

K-150

TERMINAL HEXAGONAL CRIMPING TOOL



Copper tube terminal range: 25, 35, 50, 70, 95, 120, 150 mm².

Length: 650 mm

Weight: 3.64 kgs

RYC-60

CABLE CUTTER



For Cutting copper and aluminum cable up to 60 mm².

Length: 238 mm

Weight: 0.51 kgs

RYC-100

CABLE CUTTER




For cutting copper and aluminum cable up to 100 mm².

Length: 315 mm

Weight: 0.7 kgs

RYC-250

CABLE CUTTER

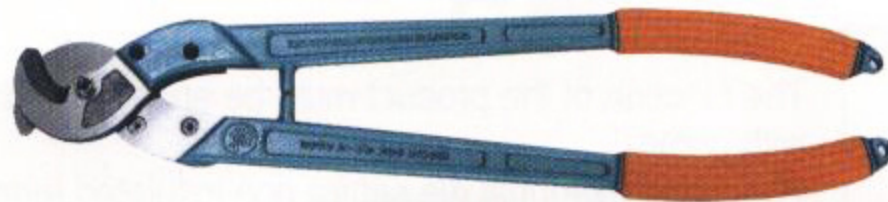

For cutting copper and aluminum cable up to 250 mm².

Length: 600 mm

Weight: 1.7 kgs

RYC-400

CABLE CUTTER




For cutting copper and aluminum cable up to 400 mm².

Length: 700 mm

Weight: 2.1 kgs

RYC-500

CABLE CUTTER

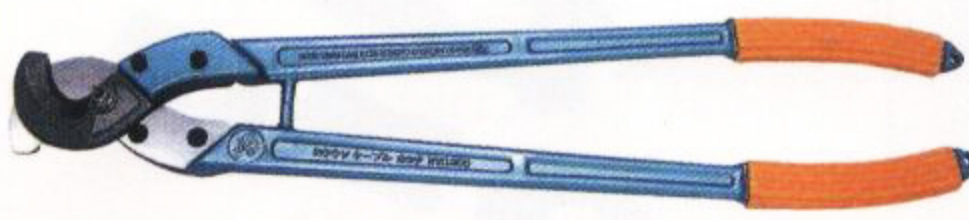

For cutting copper and aluminum cable up to 500 mm².

Length: 800 mm

Weight: 2.9 kgs

RCC-325


RATCHETING CABLE CUTTER



For cutting copper and aluminum cable up to 325 mm².
Length: 255 mm Weight: 0.6 kgs

SCC-60

STEEL WIRE ROPE CUTTER

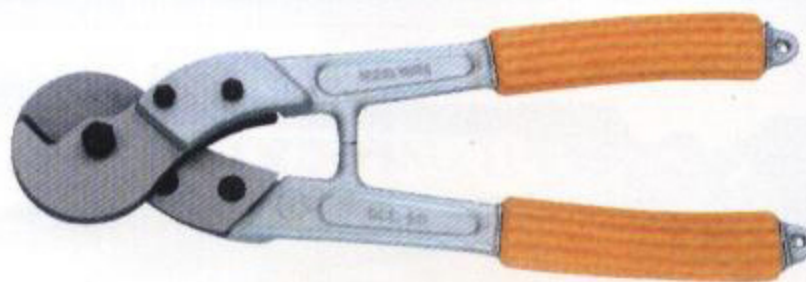

For cutting steel wire rope up to 7 mm.
Mild steel rod up to 5 mm.
Copper and aluminum cable up to 60 mm².
Length: 310 mm Weight: 0.7 kgs

SCC-200

STEEL WIRE ROPE CUTTER



For cutting steel wire rope up to 14 mm.
Mild steel rod up to 9 mm.
Copper and aluminum cable up to 150 mm².
Length: 600 mm Weight: 1.7 kgs

A.B.E TYPE WIRE STRIPPER



MODEL	APPLICATION
A TYPE	0.5, 1.2, 1.6, 2.0 mm
B TYPE	1.0, 1.6, 2.0, 2.6, 3.2 mm
E TYPE	0.5, 1.2, 1.6, 2.0, 2.6, 3.2 mm

Length: 160 mm Weight: 0.26 kgs

CO-325B (CO-400B) HYDRAULIC CRIMPING TOOL



The function of the product must be applied combine with pump.
With 9 of hexagonal die set for non insulated terminal 8-325 mm², copper tube terminal 10-400 mm².
Die set include: 8-14 mm² (10-25 mm²), 22 mm² (35 mm²), 38 mm² (50-70 mm²), 60-70 mm² (95 mm²), 80 mm² (120 mm²), 100 mm² (150 mm²), 150-180 mm² (185-240 mm²), 200 mm² (300 mm²), 325 mm² (400 mm²).
Weight: 8 kgs

CP-700 HYDRAULIC HAND PUMP



Hydraulic hand pump with two stage speed action. Pump release 700 kgs/cm² (10,000 psi) pressure achieved.
Hose: 2 m Capacity: 900 c.c. Weight: 9 kgs

CO-630 HYDRAULIC CRIMPING TOOL



The function of the product must be applied combine with pump.
With 6 of hexagonal die set for copper tube terminal 150-630 mm².
Die set include: 150-185 mm², 240 mm², 300 mm², 400 mm², 500 mm², 630 mm². Weight: 13 kgs

CPO-325B (CPO-400B) HYDRAULIC CRIMPING TOOL



With a two stage speed action for use.
With 9 of hexagonal die set for non insulated terminal 8-325 mm², copper tube terminal 10-400 mm².
Die set include: 8-14 mm² (10-25 mm²), 22 mm² (35 mm²), 38 mm² (50-70 mm²), 60-70 mm² (95 mm²), 80 mm² (120 mm²), 100 mm² (150 mm²), 150-180 mm² (185-240 mm²), 200 mm² (300 mm²), 325 mm² (400 mm²).
Output: 20 ton Weight: 14 kgs

CPC-85A
HYDRAULIC CUTTER



With a two stage speed action for use.
Bare Copper Strands: 28 mm.
Bare Aluminum Strands: 46 mm.
Telephone Cable CCP: 85 mm.
Lead Sheathed Cable: 85 mm.
Under Ground Cable: 50 mm.

Output: 4.5 ton Weight: 8.5 kgs

CPC-85B



The function of the product must be applied combine with pump.
Bare Copper Strands: 28 mm.
Bare Aluminum Strands: 46 mm.
Telephone Cable CCP: 85 mm.
Lead Sheathed Cable: 85 mm.
Under Ground Cable: 50 mm.
Weight: 6.3 kg

CYO-400
HYDRAULIC CRIMPING TOOL



With a two stage speed action for use.
With 9 of hexagonal die set for copper tube terminal
50-400 mm².
Die set include: 50, 70, 95, 120, 150, 185, 240, 300,
400 mm².

30 mm jaw opening.

Output: 12 ton

Weight: 6.5 kgs.