



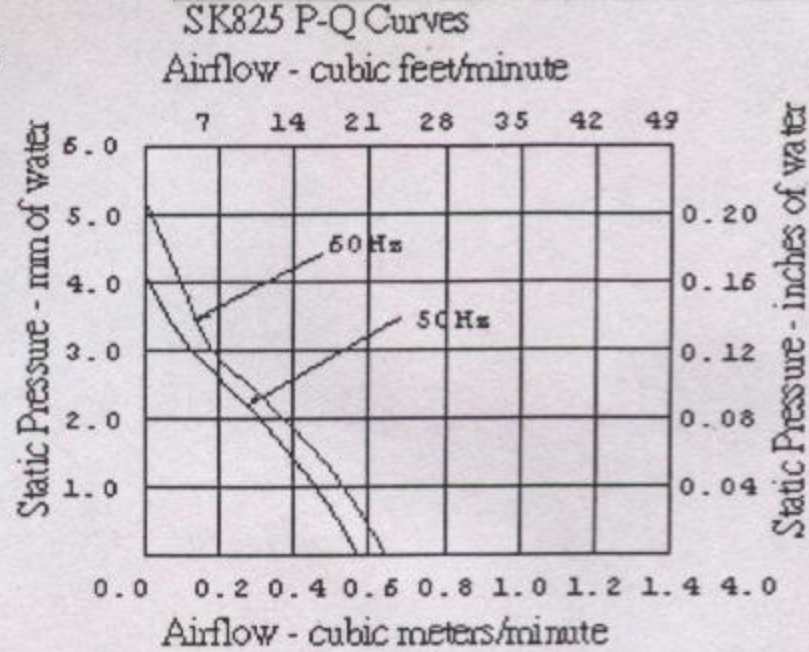



馬達	Motor	:	Shaded pole, impedance protected
外殼	Housing / Frame	:	Die-cast aluminum, Painted black (AP)
風葉	Impeller	:	Glass reinforced thermoplastic, UL 94V-0
軸承	Bearing Type	:	Two-ball or sleeve available
接電方式	Connecting	:	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	:	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	:	Ball bearing -20°C~+80°C; Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	:	Ball bearing 60,000 hours at 60°C; Sleeve bearing 20,000 hours at 45°C
淨重	Net Weight	:	260gm(0.57 pound)
檢定	Safety Approvals	:	UL E202962 and cUL E202962

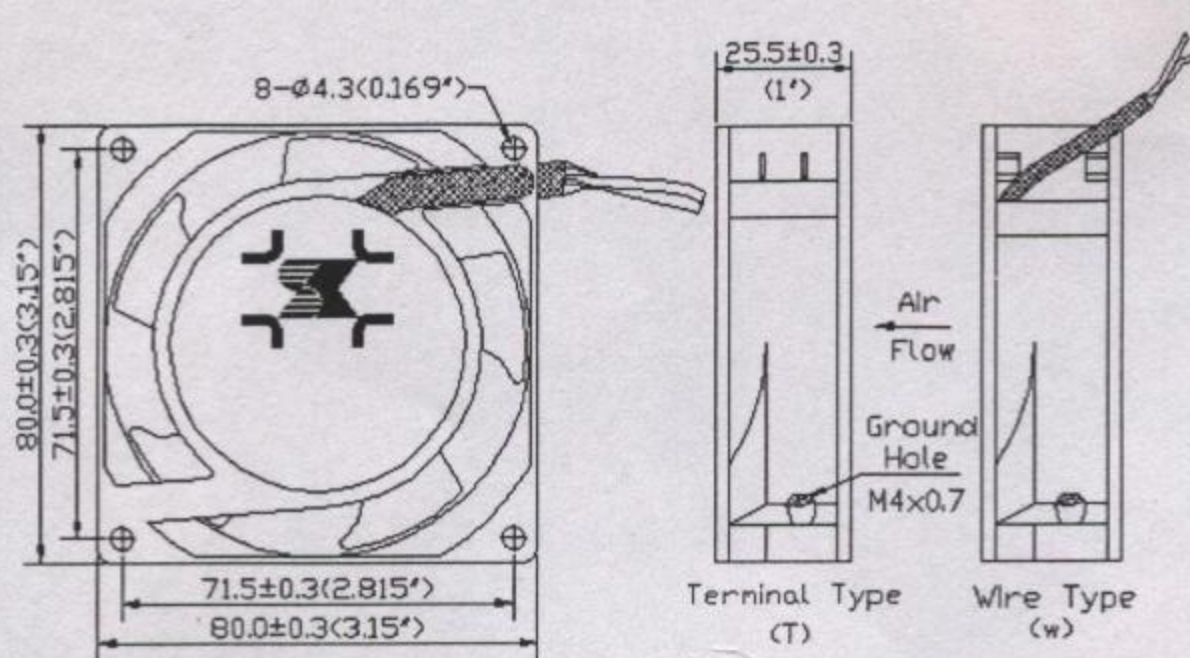


型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H₂O inch-H₂O	噪音 Noise Level (dB)
SK825AP-11-1	100 115	70-110 80-130	50/60	15/13	2500/3000	0.62/0.71 22/25	4.5/5.3 0.18/0.21	28±2
SK825AP-11-2		70-110 80-130		8/6	2200/2300	0.48/0.51 17/18	3.2/3.5 0.13/0.14	24±2
SK825AP-11-3		80-120 80-130		6/4	1800/1600	0.40/0.37 14/13	2.8/2.7 0.11/0.11	20±2
SK825AP-22-1	200 220 240	150-210 150-240 160-260	50/60	15/13	2500/3000	0.62/0.71 22/25	4.5/5.3 0.18/0.21	28±2
SK825AP-22-2		150-210 150-240 160-260		8/6	2200/2300	0.48/0.51 17/18	3.2/3.5 0.13/0.14	24±2
SK825AP-22-3		150-210 150-240 160-260		6/4	1800/1600	0.40/0.37 14/13	2.8/2.7 0.11/0.11	20±2

SK838 P-Q Curves


Airflow - cubic feet/minute

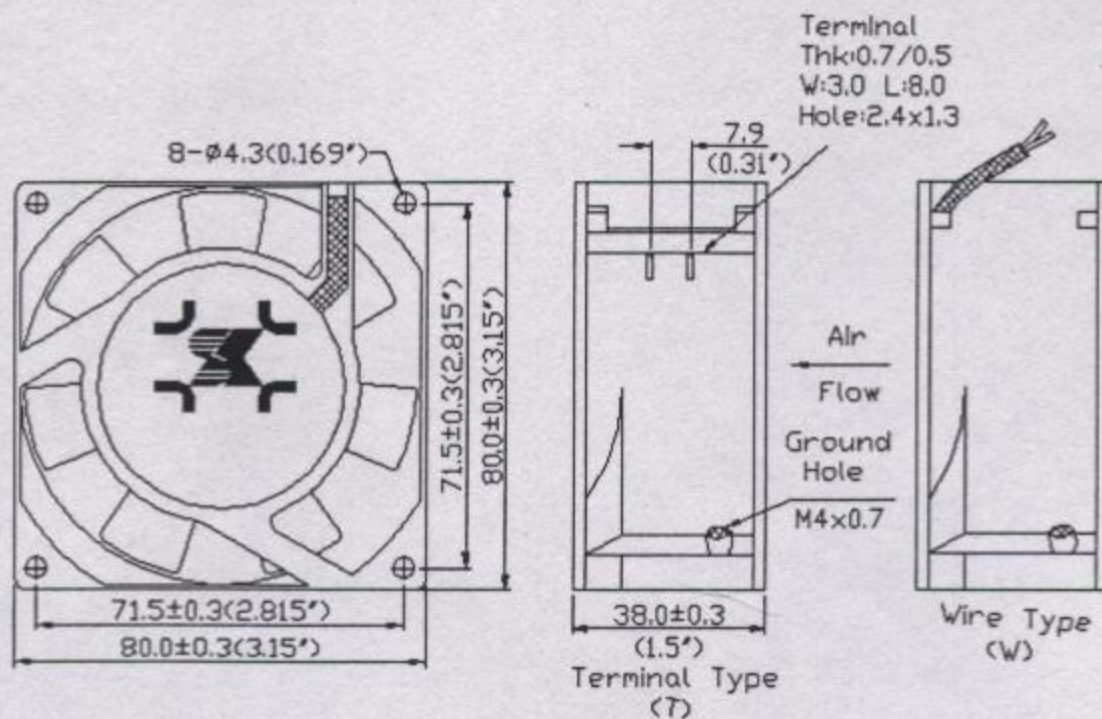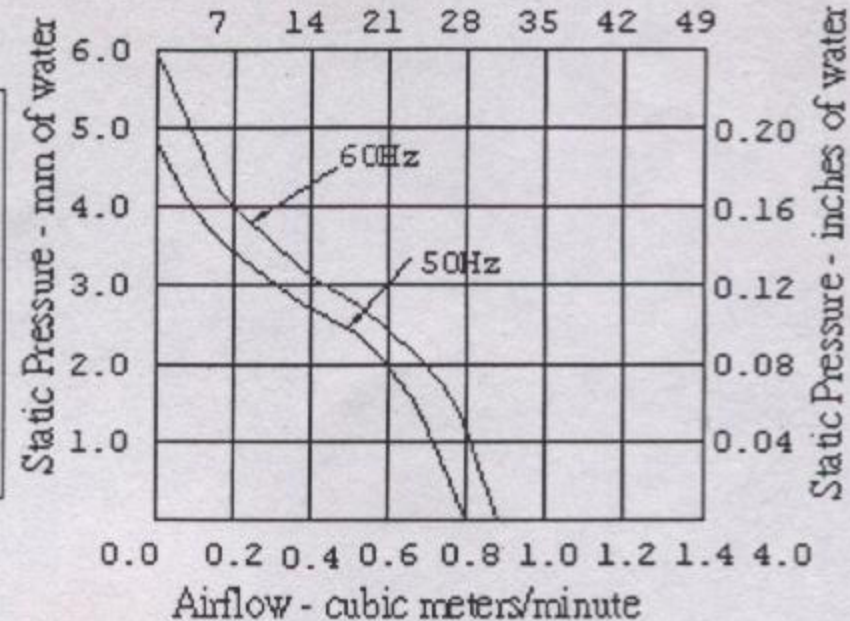


馬達	Motor	:	Shaded pole, impedance protected
外殼	Housing / Frame	:	Die-cast aluminum, Painted black (AP)
風葉	Impeller	:	Glass reinforced thermoplastic, UL 94V-0
軸承	Bearing Type	:	Two-ball or sleeve available
接電方式	Connecting	:	T-Terminal push-on type or W-Lead wire type
耐壓	Dielectric Strength	:	1 min. at 1,500VAC, 50/60Hz
溫度範圍	Operating Temp	:	Ball bearing -20°C~+80°C; Sleeve bearing -10°C~+55°C
壽命	Life Expectancy	:	Ball bearing 60,000 hours at 60°C; Sleeve bearing 20,000 hours at 45°C
淨重	Net Weight	:	370gm(0.82 pound)
檢定	Safety Approvals	:	Meets UL, CSA, VDE, TUV standards

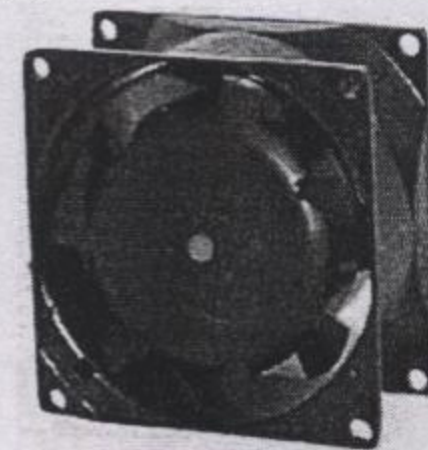


型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m³/min	CFM	mm-H₂O	inch-H₂O	
SK838AP-11-1	100 115	70-110 80-130	50/60	14/12	2450/3000	0.74/0.88	26/31	4.3/6.0	0.17/0.24	29±2
SK838AP-11-2		70-110 80-130		11/9	2100/2300	0.62/0.65	22/23	3.5/3.8	0.14/0.15	22±2
SK838AP-11-3		70-110 80-130		7/5	1800/1600	0.51/0.48	18/17	3.0/2.5	0.12/0.10	18±2
SK838AP-22-1	200 220	150-210 150-240	50/60	14/12	2450/3000	0.74/0.88	26/31	4.3/6.0	0.17/0.24	29±2
SK838AP-22-2		150-210 150-240		11/9	2100/2300	0.62/0.65	22/23	3.5/3.8	0.14/0.15	22±2
SK838AP-22-3		150-210 150-240		7/5	1800/1600	0.51/0.48	18/17	3.0/2.5	0.12/0.10	18±2
SK838AP-24-1	240	160-260	50/60	14/12	2450/3000	0.74/0.88	26/31	4.3/6.0	0.17/0.24	29±2
SK838AP-24-2		160-260		11/9	2100/2300	0.62/0.65	22/23	3.5/3.8	0.14/0.15	22±2
SK838AP-24-3		160-260		7/5	1800/1600	0.51/0.48	18/17	3.0/2.5	0.12/0.10	18±2

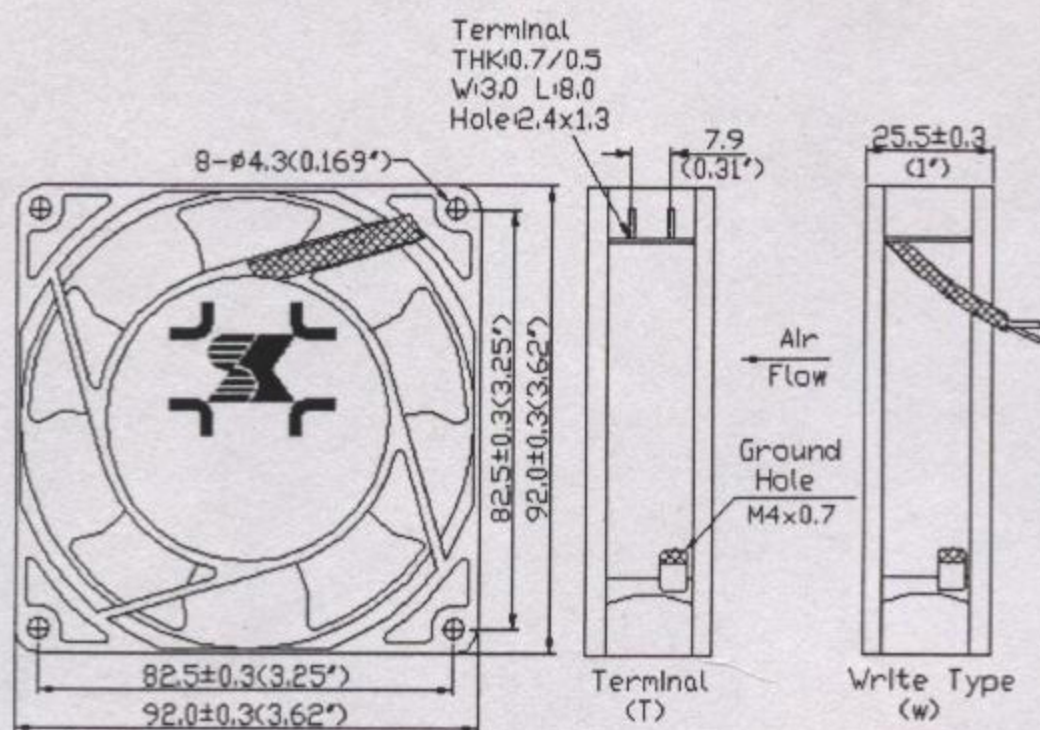


SK92 P-Q Curves
Airflow - cubic feet/minute

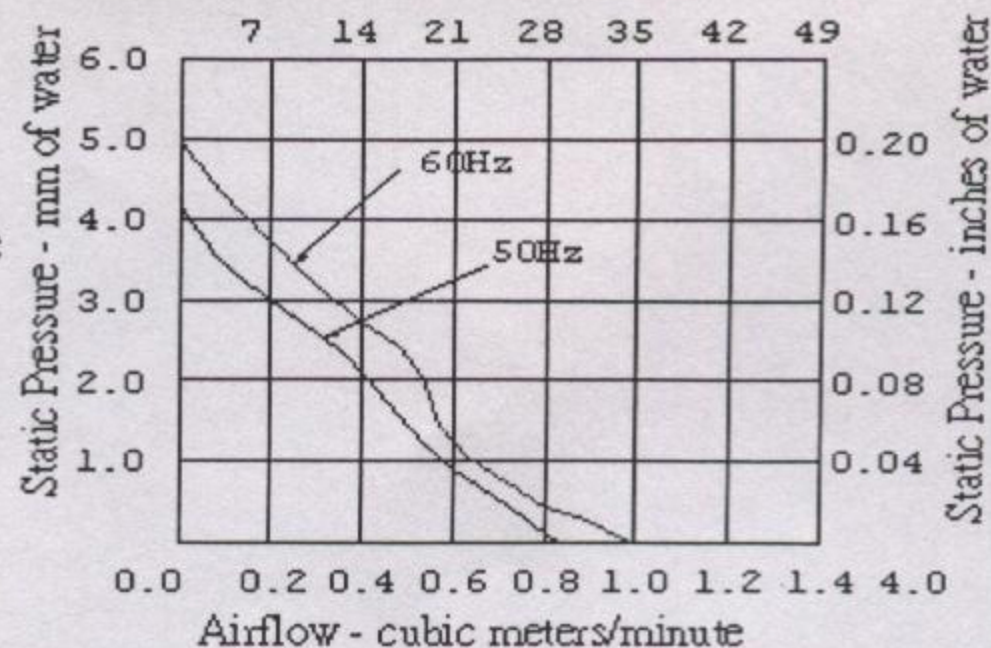


馬達 Motor	: Shaded pole, impedance protected
外殼 Housing / Frame	: Die-cast aluminum, Painted black (AP)
風葉 Impeller	: Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	: Two-ball or sleeve available
接電方式 Connecting	: T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	: 1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	: Ball bearing -20°C~+80°C Sleeve bearing -10°C~+55°C
壽命 Life Expectancy	: Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	: 290gm(0.64 pound)
檢定 Safety Approvals	: UL E202962 and cUL E202962

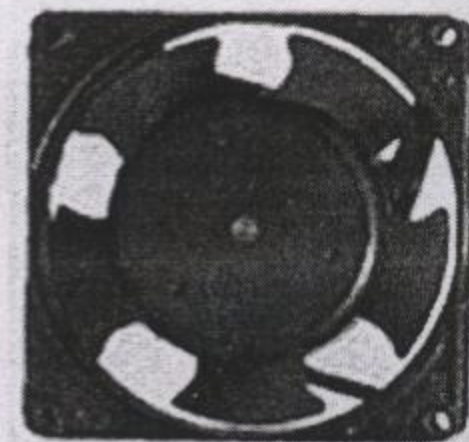


型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
SK92AP-11-1	110 115	70-110 80-130	50/60	15/13	2500/3000	0.85/0.99	30/35	4.0/5.0	0.16/0.20	30±2
SK92AP-11-2		70-110 80-130		12/10	2100/2300	0.71/0.77	25/27	3.2/3.5	0.13/0.14	22±2
SK92AP-11-3		70-110 80-130		8/6	1800/1600	0.62/0.60	22/21	2.5/2.3	0.10/0.09	19±2
SK92AP-22-1	200 220	150-210 150-240	50/60	15/13	2500/3000	0.85/0.99	30/35	4.0/5.0	0.16/0.20	30±2
SK92AP-22-2		150-210 150-240		12/10	2100/2300	0.71/0.77	25/27	3.2/3.5	0.13/0.14	22±2
SK92AP-22-3		150-210 150-240		8/6	1800/1600	0.62/0.60	22/21	2.5/2.3	0.10/0.09	19±2
SK92AP-24-1	240	160-260	50/60	15/13	2500/3000	0.85/0.99	30/35	4.0/5.0	0.16/0.20	30±2
SK92AP-24-2		160-260		12/10	2100/2300	0.71/0.77	25/27	3.2/3.5	0.13/0.14	22±2
SK92AP-24-3		160-260		8/6	1800/1600	0.62/0.60	22/21	2.5/2.3	0.10/0.09	19±2

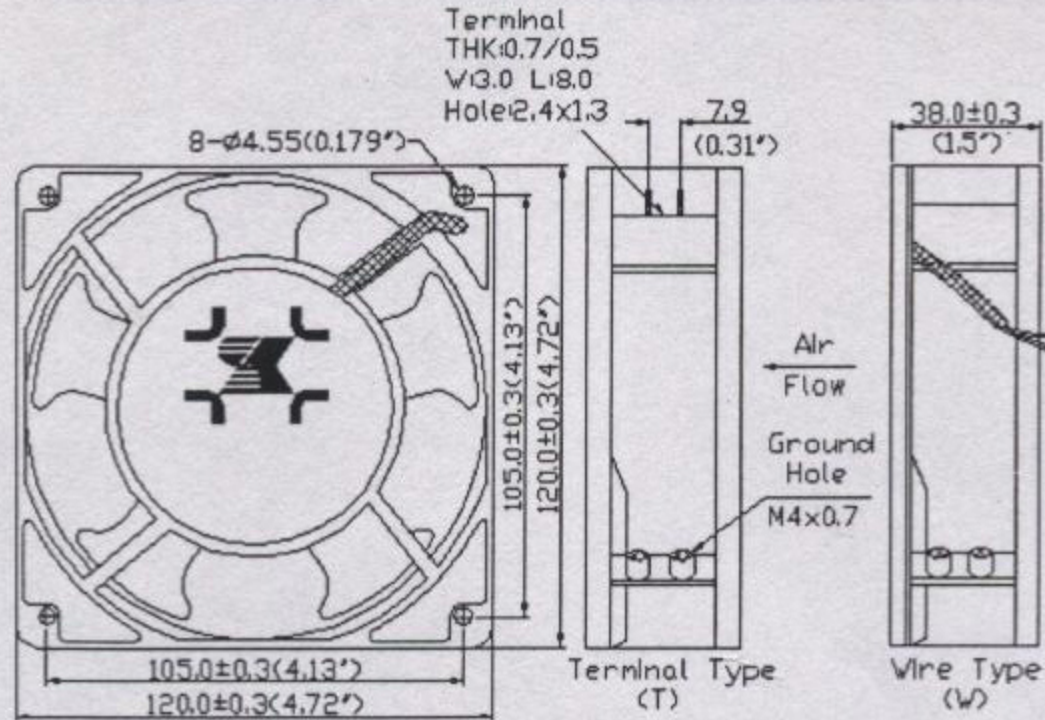



SK109 P-Q Curves
Airflow - cubic feet/minute

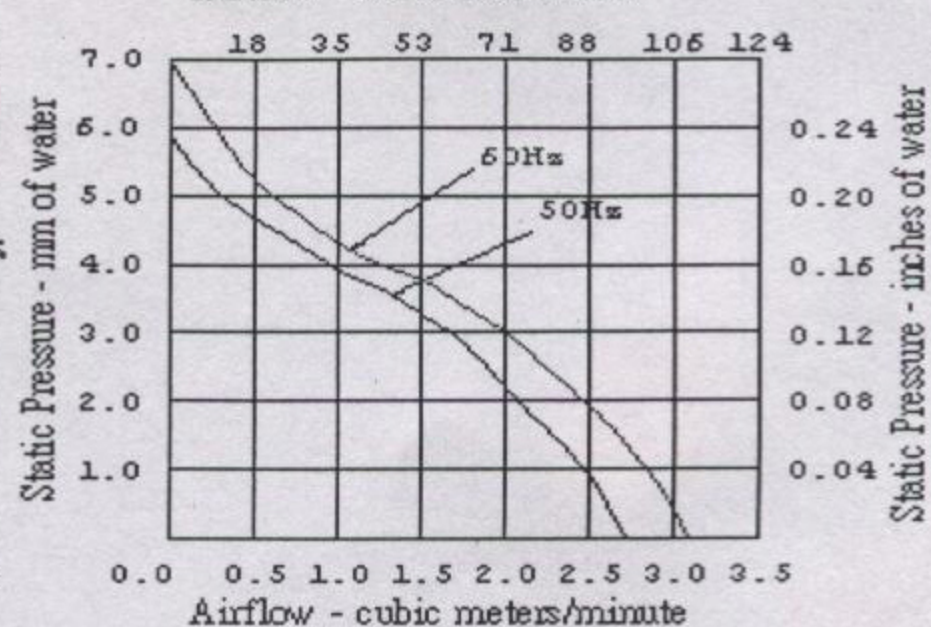


馬達 Motor	:	Shaded pole, impedance protected
外殼 Housing / Frame	:	Die-cast aluminum, Painted black (AP) or Plated (AN)
風葉 Impeller	:	Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	:	Two-ball or sleeve available
接電方式 Connecting	:	T-Terminal push-on type or W-Lead wire type
耐壓 Dielectric Strength	:	1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	:	Ball bearing -20°C ~ +80°C Sleeve bearing -10°C ~ +55°C
壽命 Life Expectancy	:	Ball bearing 60,000 hours at 60°C Sleeve bearing 20,000 hours at 45°C
淨重 Net Weight	:	550gm (1.2 pounds)
檢定 Safety Approvals	:	UL E202962 and cUL E202962

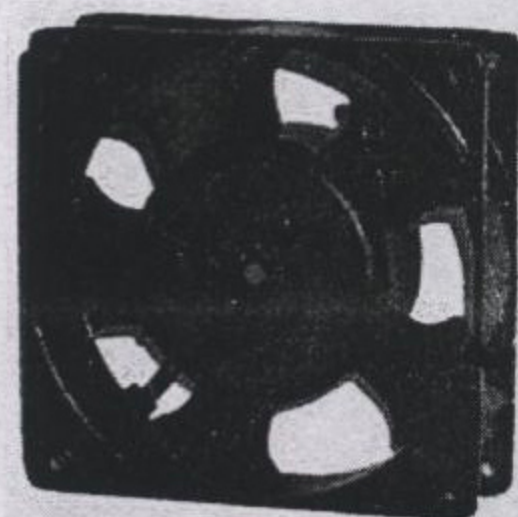


型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM	最大風壓 Max. Static Pressure mm-H₂O inch-H₂O	噪音 Noise Level (dB)
SK109AP-11-1	110 115	70-110 80-130	50/60	17/15	2500/3000	2.5/3.1 88/110	5.8/7.0 0.23/0.28	42±2
SK109AP-11-2		70-110 80-130		13/11	2100/2300	1.8/2.0 63/71	4.9/5.4 0.19/0.21	35±2
SK109AP-11-3		70-110 80-130		10/8	1800/1600	1.5/1.4 53/50	4.0/3.7 0.16/0.15	26±2
SK109AP-22-1	200 220	150-210 150-240	50/60	17/15	2500/3000	2.5/3.1 88/110	5.8/7.0 0.23/0.28	42±2
SK109AP-22-2		150-210 150-240		13/11	2100/2300	1.8/2.0 63/71	4.9/5.4 0.19/0.21	35±2
SK109AP-22-3		150-210 150-240		10/8	1800/1600	1.5/1.4 53/50	4.0/3.7 0.16/0.15	26±2
SK109AP-24-1	240	160-260	50/60	17/15	2500/3000	2.5/3.1 88/110	5.8/7.0 0.23/0.28	42±2
SK109AP-24-2		160-260		13/11	2100/2300	1.8/2.0 63/71	4.9/5.4 0.19/0.21	35±2
SK109AP-24-3		160-260		10/8	1800/1600	1.5/1.4 53/50	4.0/3.7 0.16/0.15	26±2

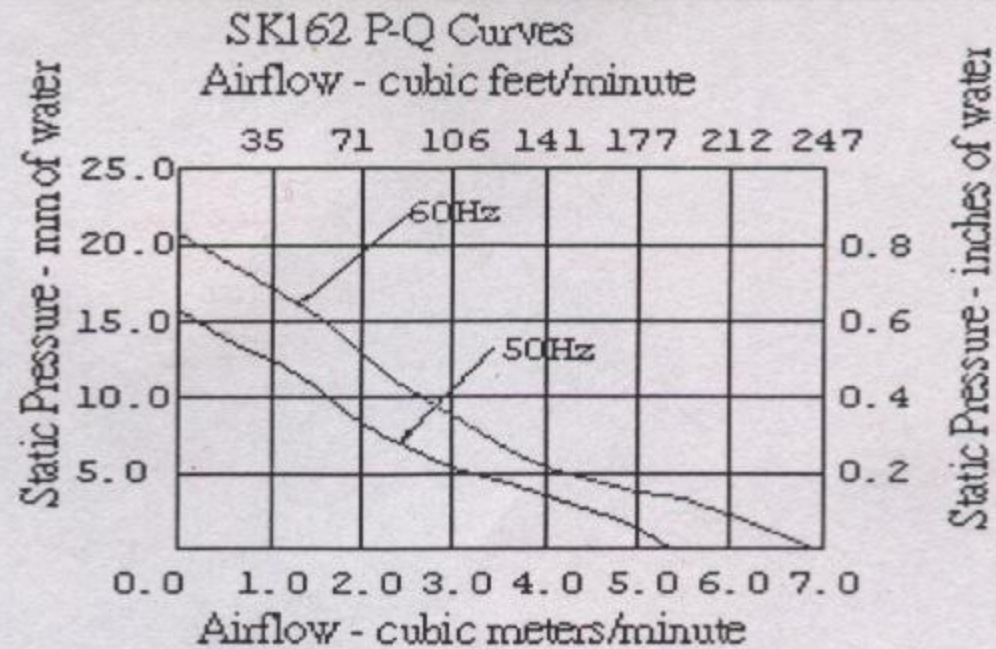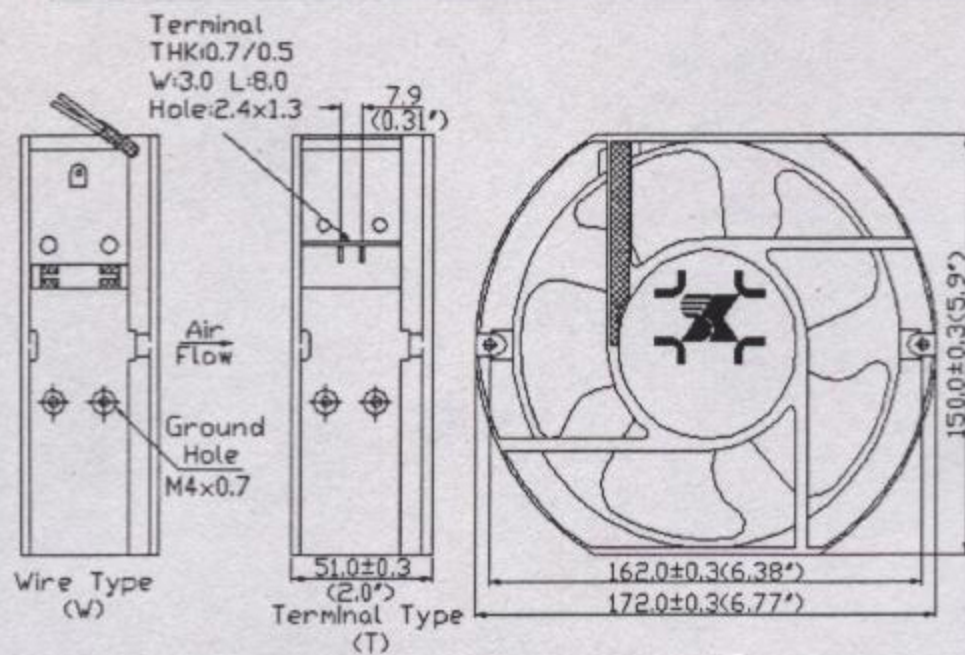

- 馬達 Motor : Shaded pole, impedance protected or thermally protected
- 外殼 Housing / Frame : Die-cast aluminum, Painted black (AP) or Plated (AN)
- 風葉 Impeller : Glass reinforced thermoplastic, UL 94V-0
- 軸承 Bearing Type : Two-ball bearing
- 接電方式 Connecting : T-Terminal push-on type or W-Lead wire type
- 耐壓 Dielectric Strength : 1 min. at 1,500VAC, 50/60Hz
- 溫度範圍 Operating Temp : Ambient -10°C~+55°C
- 壽命 Life Expectancy : 50,000 hours at 25°C
30,000 hours at 65°C
- 淨重 Net Weight : 1,050gm(2.31 pounds)
- 檢定 Safety Approvals : Meets UL, CSA, VDE, TUV standards

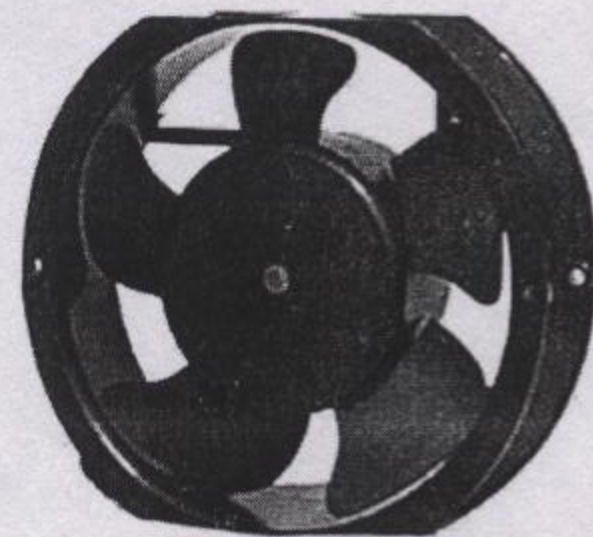


型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m³/min	CFM	mm-H₂O	inch-H₂O	
SK162AP-11-1	100 115	70-110 80-130	50/60	42/38	2600/3000	5.4/6.5	190/230	16/20	.63/.79	50±2
SK162AP-11-2		70-110 80-130		23/20	2300/2400	4.5/4.2	159/148	13/14	.51/.55	40±2
SK162AP-11-3		80-120 80-130		18/16	1600/1400	3.2/2.9	113/100	10/8	.40/.31	32±2
SK162AP-22-1	200 220 240	150-210 150-240 160-260	50/60	40/36	2600/3000	5.4/6.5	190/230	16/20	.63/.79	50±2
SK162AP-22-2		150-210 150-240 160-260		23/20	2300/2400	4.5/4.2	159/148	13/14	.51/.55	40±2
SK162AP-22-3		150-210 150-240 160-260		18/16	1600/1400	3.2/2.9	113/100	10/8	.40/.31	32±2

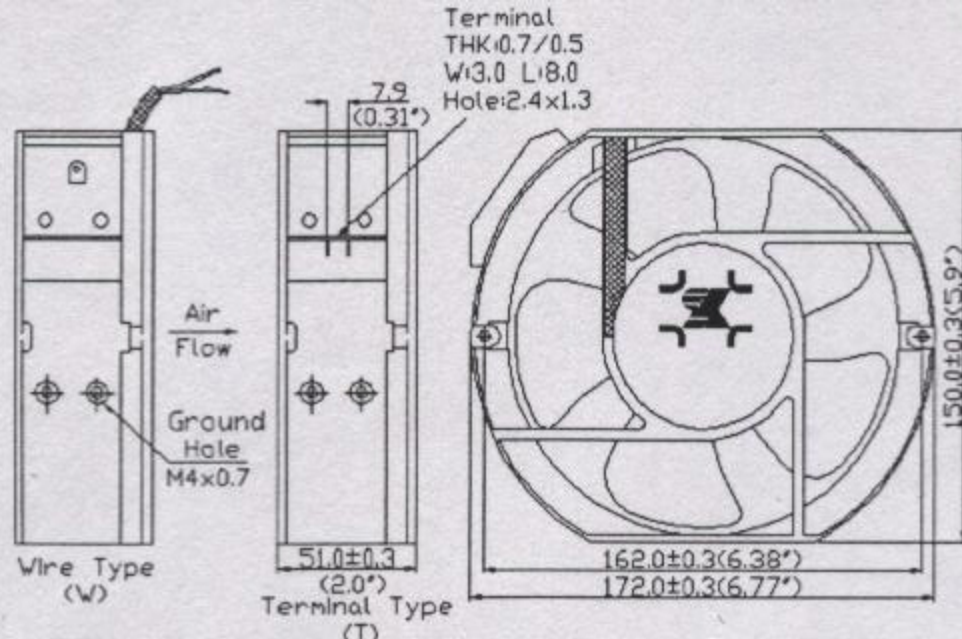

Static Pressure - mm of water

SK172 P-Q Curves
Airflow - cubic feet/minute

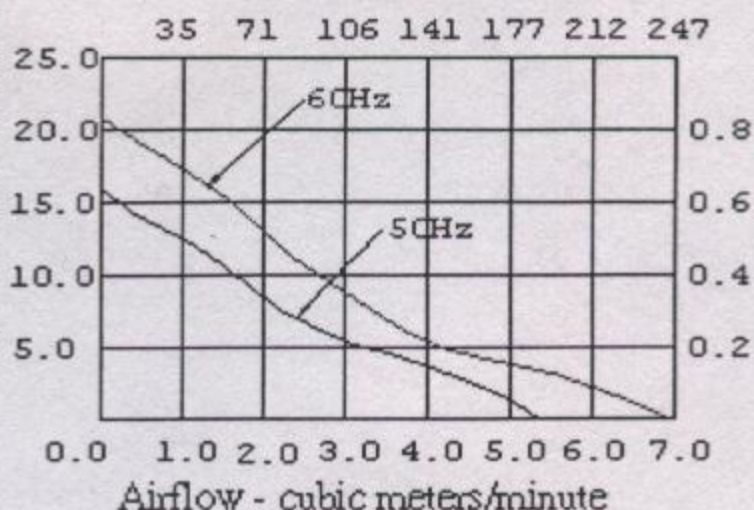

Static Pressure - inches of water

馬達 Motor

: Single phase induction capacitor motor,
thermally protected or impedance protected

外殼 Housing / Frame

: Die-cast aluminum, Painted black (AP) or Plated (AN)

風葉 Impeller

: Glass reinforced thermoplastic, UL 94V-0

軸承 Bearing Type

: Two-ball bearing

接電方式 Connecting

: T-Terminal push-on type or
W-Lead wire type

耐壓 Dielectric Strength

: 1 min. at 1,500VAC, 50/60Hz

溫度範圍 Operating Temp

: -20°C ~ +80°C

壽命 Life Expectancy


: 60,000 hours at 25°C
40,000 hours at 65°C

淨重 Net Weight



: 1,050gm (2.31 pounds)

檢定 Safety Approvals


: UL E202962; cUL E202962

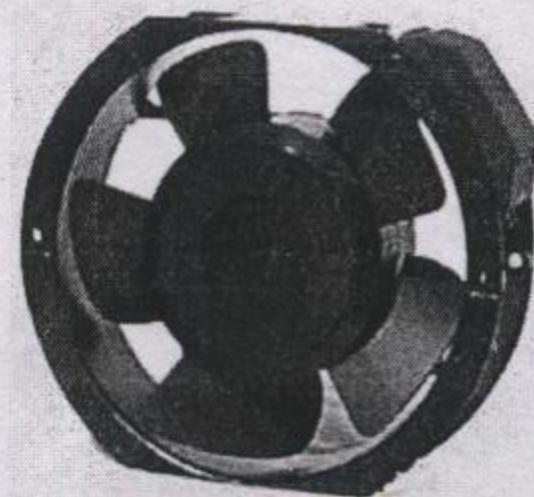

型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow		最大風壓 Max. Static Pressure		噪音 Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
SK172AP-11-1	100 115	70-110 80-130	50/60	23.7/27.5	2600/3000	5.4/6.6	190/235	16/20	.63/.79	50±2
SK172AP-11-2		70-110 80-130		22/20	2470/2370	4.7/4.8	165/170	13/14	.51/.55	40±2
SK172AP-11-3		80-120 80-130		18/16	1600/1800	3.1/3.0	110/106	10/8	.40/.31	32±2
SK172AP-22-1	200 220 240	150-210 150-240 160-260	50/60	24.4/28.5	2600/3000	5.4/6.6	190/235	16/20	.63/.79	50±2
SK172AP-22-2		150-210 150-240 160-260		22/20	2300/2400	4.7/4.8	165/170	13/14	.51/.55	40±2
SK172AP-22-3		150-210 150-240 160-260		18/16	1600/1800	3.1/3.0	110/106	10/8	.40/.31	32±2

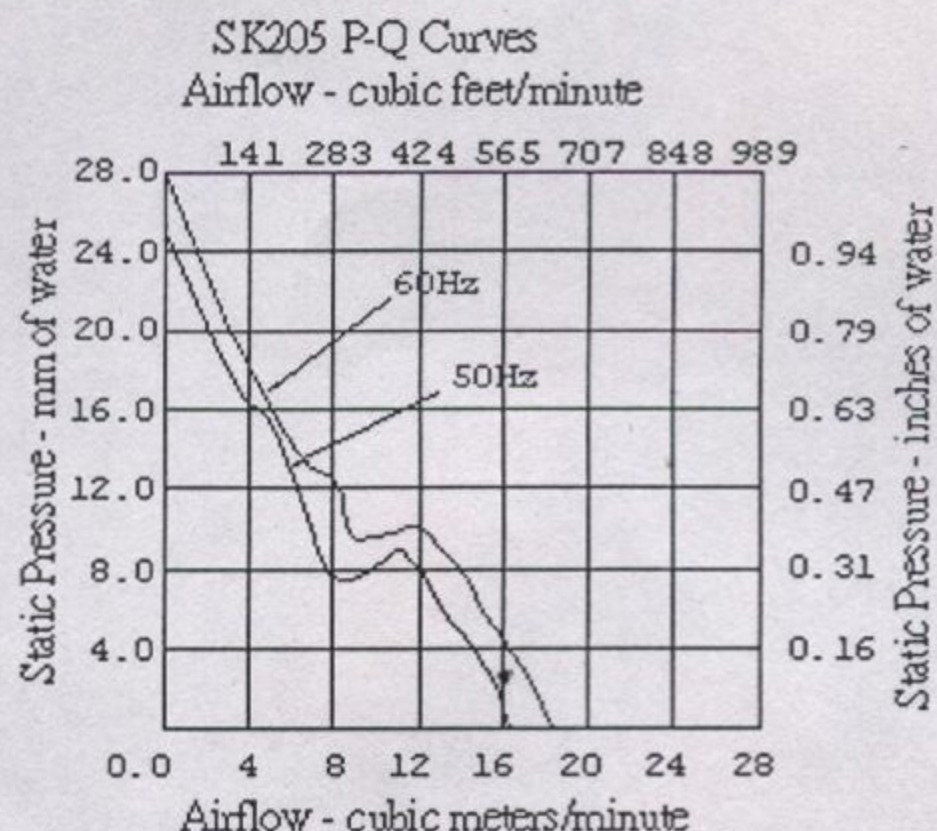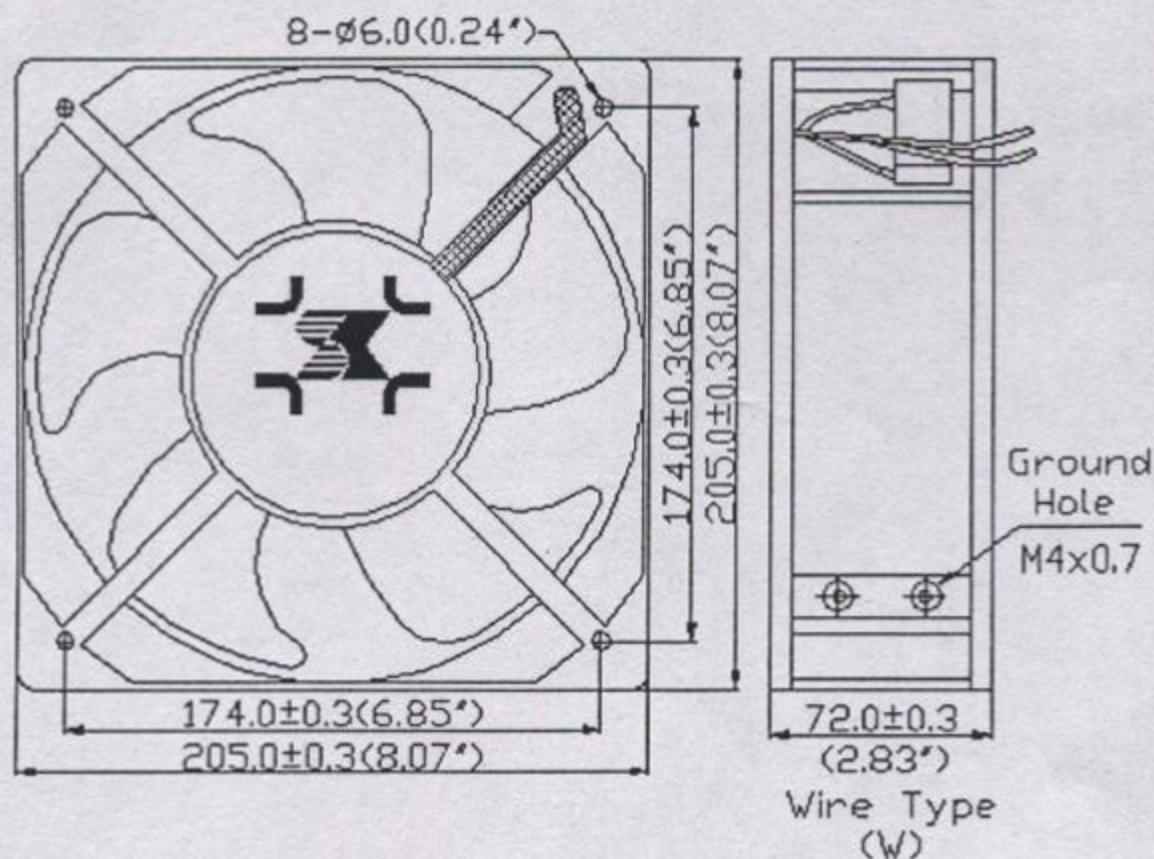

馬達 Motor	: Single phase induction capacitor motor, thermally protected
外殼 Housing / Frame	: Die-cast aluminum, Painted black (AP)
風葉 Impeller	: Glass reinforced thermoplastic, UL 94V-0
軸承 Bearing Type	: Two-ball Bearing
接電方式 Connecting	: W-Lead wire type
耐壓 Dielectric Strength	: 1 min. at 1,500VAC, 50/60Hz
溫度範圍 Operating Temp	: -20°C~+80°C
壽命 Life Expectancy	: 60,000 hours at 60°C
淨重 Net Weight	: 2.1 kg (4.6 pounds) ± 10%
檢定 Safety Approvals	: Meets UL, CSA, VDE, TUV standards

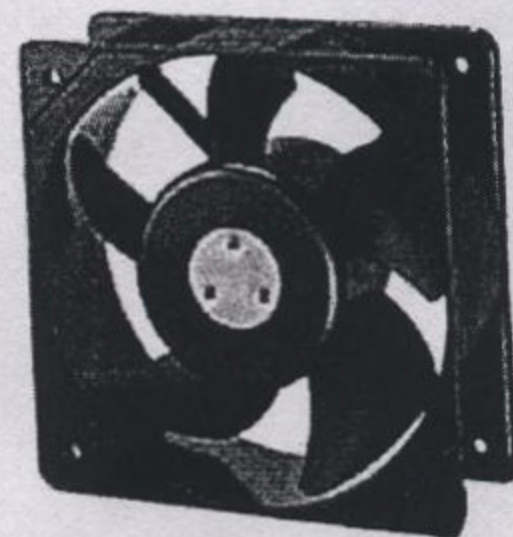

型號 Model No.	電壓 Rated VAC	電壓範圍 Voltage Range VAC	頻率 Freq. Hz	功率 Rated Input Watt	轉速 Rated Speed RPM	最大風量 Max. Air Flow m³/min CFM		最大風壓 Max. Static Pressure mm-H₂O inch- H₂O		噪音 Noise (dB)
SK205AP-11-1	110	70~120	50/60	65/102	2880/3400	16.4/18.3	580/647	25/28	.98/1.1	60±2
SK205AP-22-1	220	150~240		65/102	2860/3350	16.4/18.3	580/647	25/28	.98/1.1	60±2