

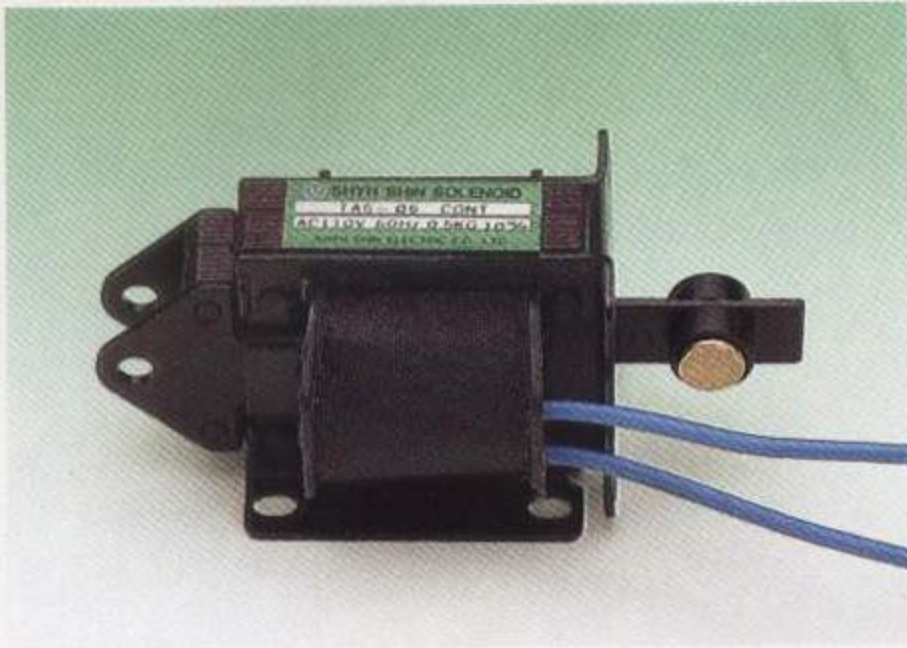
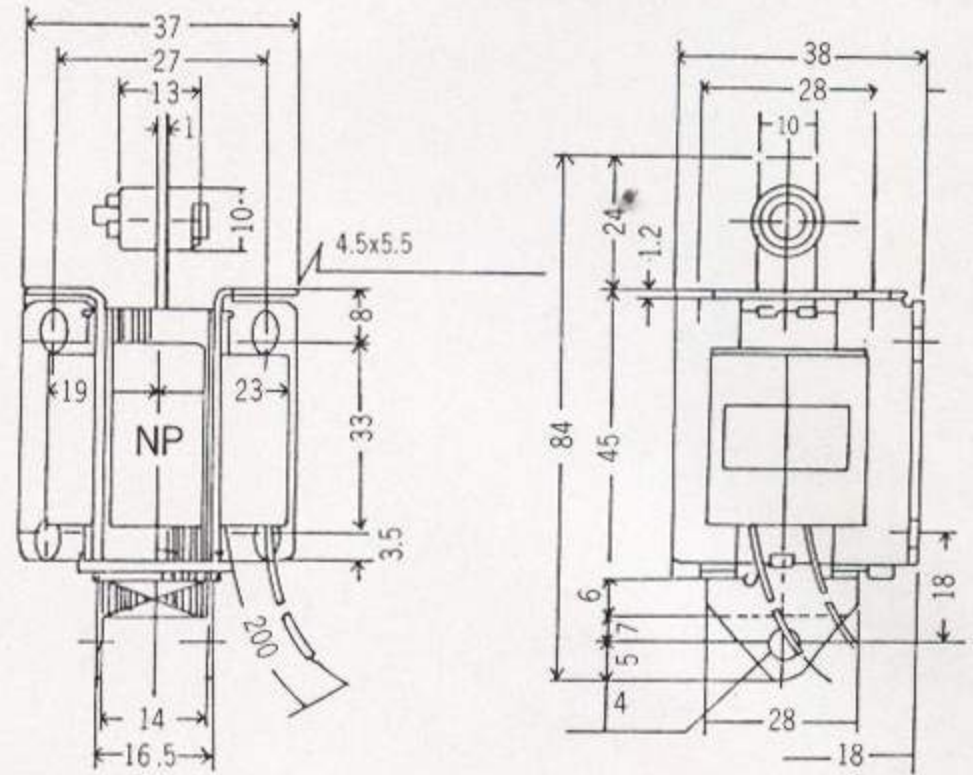


TAS-05


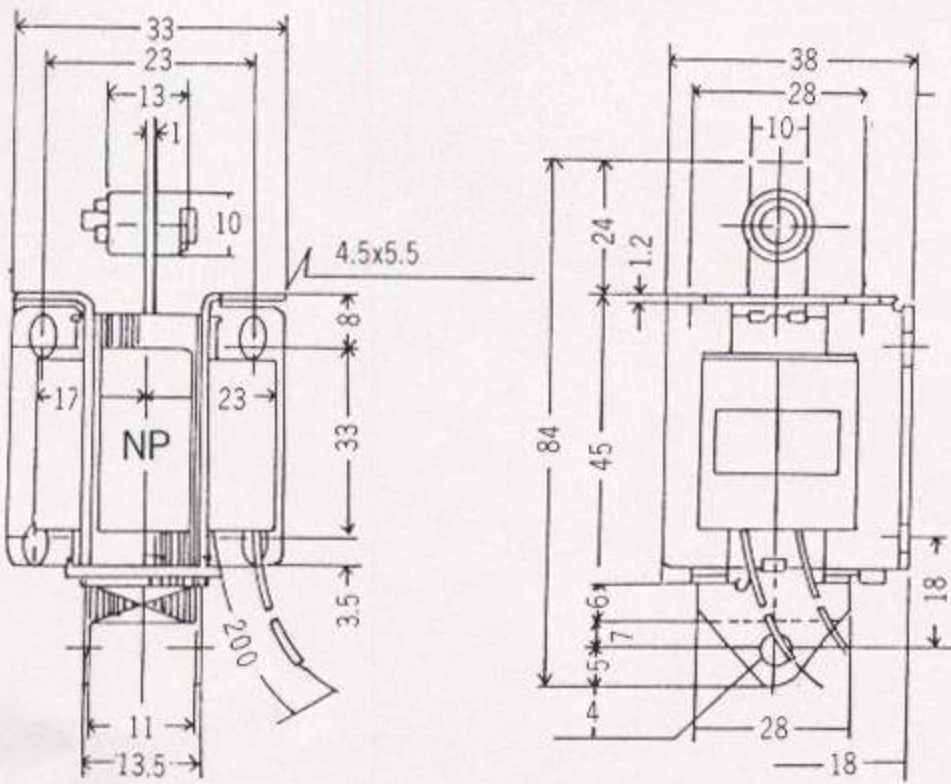


TAS-06


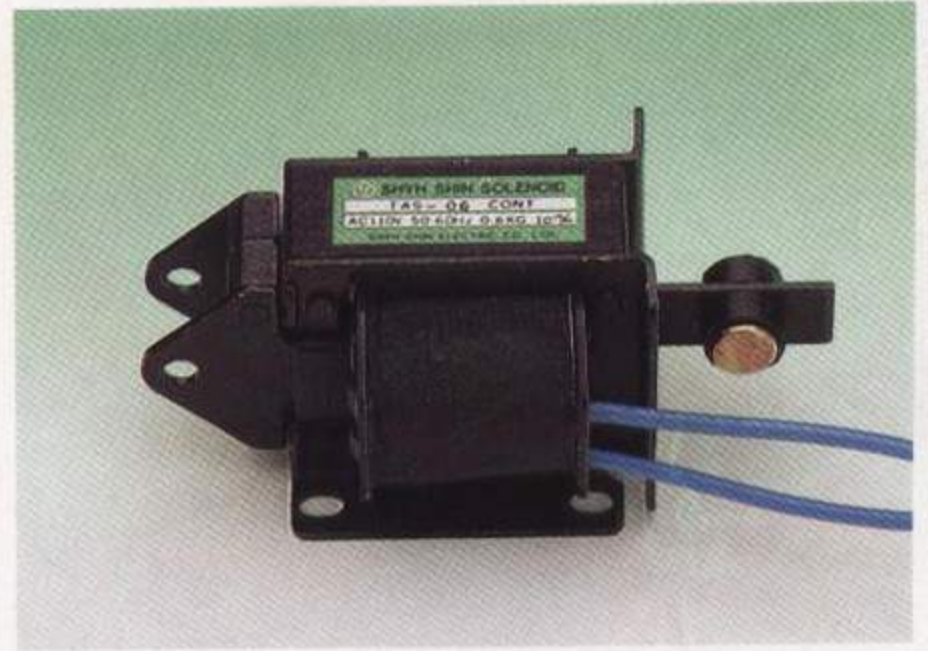


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	1.1A	0.23A	0.5kg/10 ^m _m
220V	0.65A	0.12A	


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	1.2A	0.25A	0.6kg/10 ^m _m
220V	0.7A	0.13A	

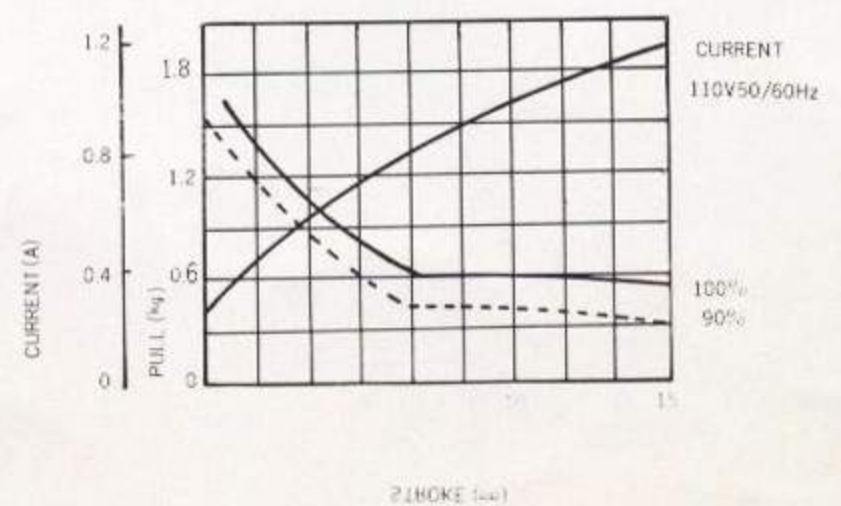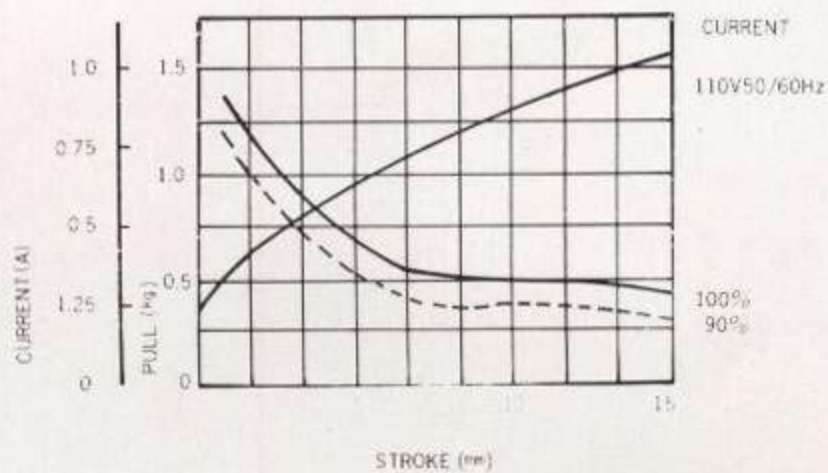



TAS-08

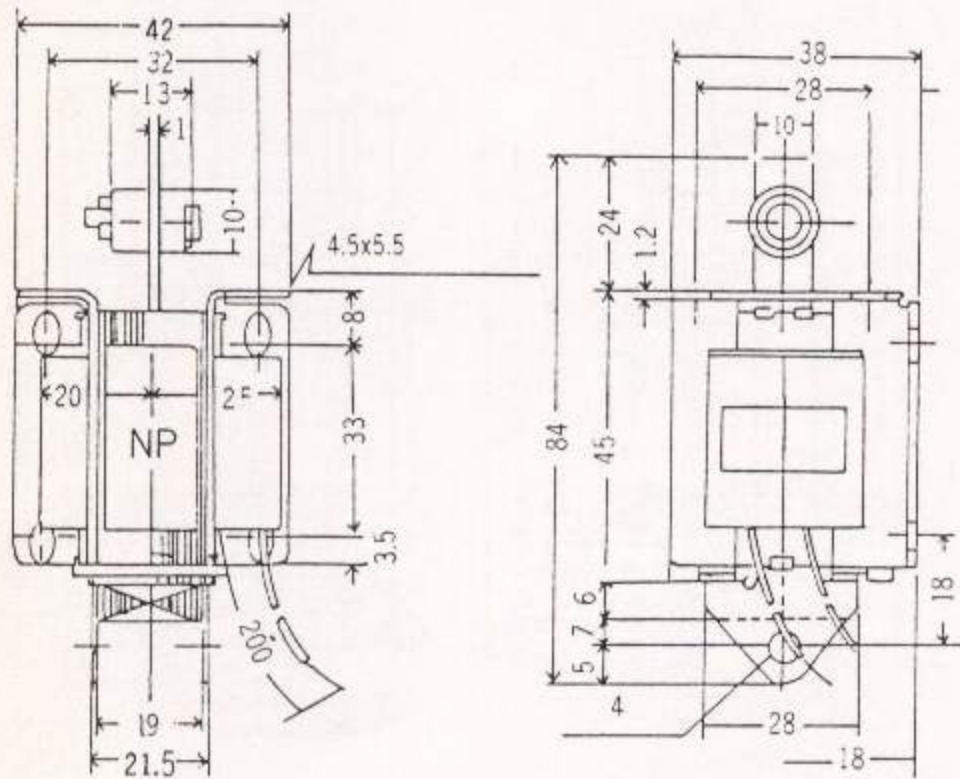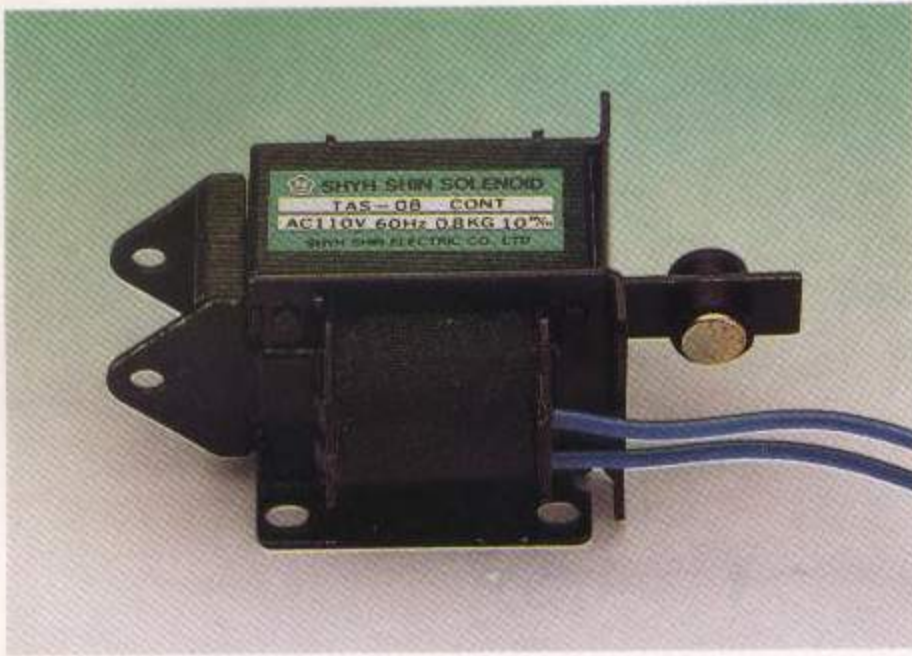


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	2.2A	0.22A	0.8kg / 10 ^m _m
220V	1.1A	0.12A	

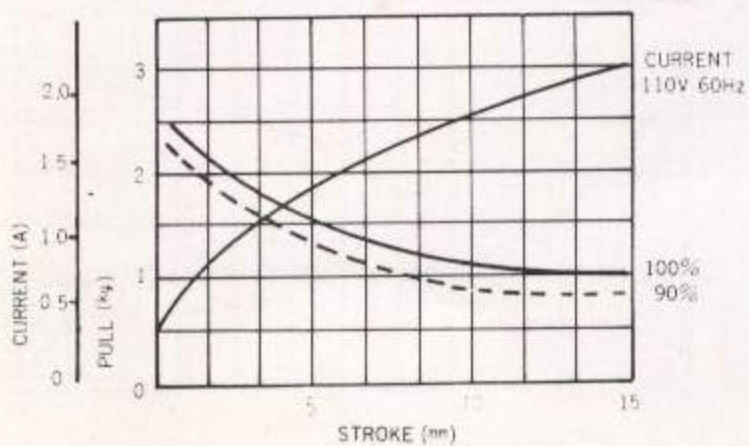



TAS-5

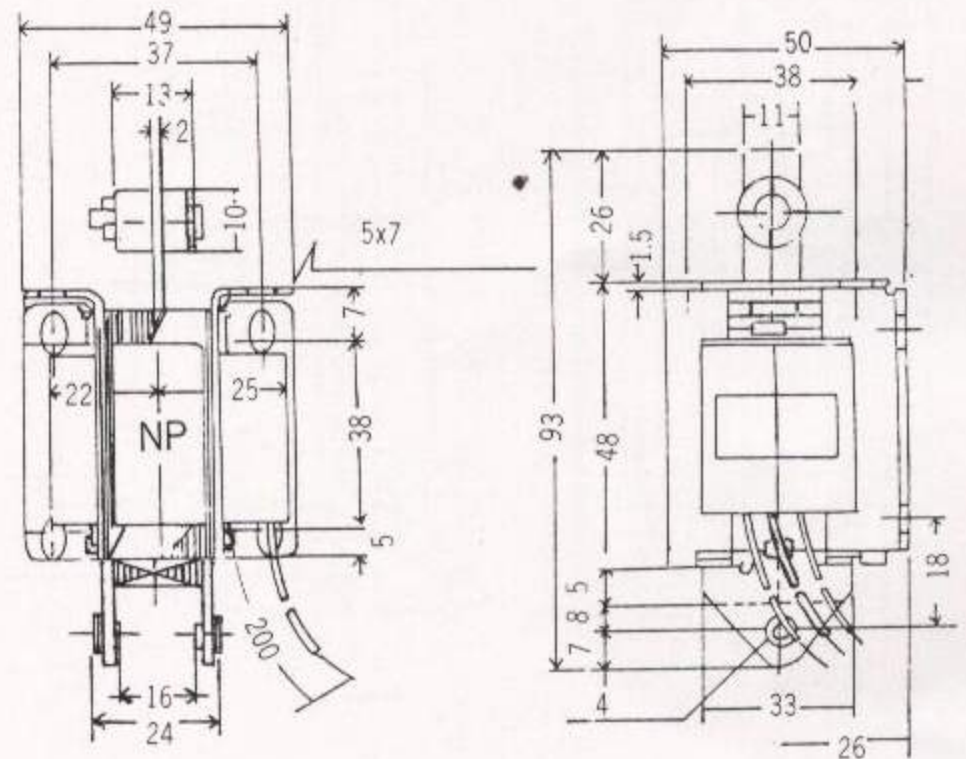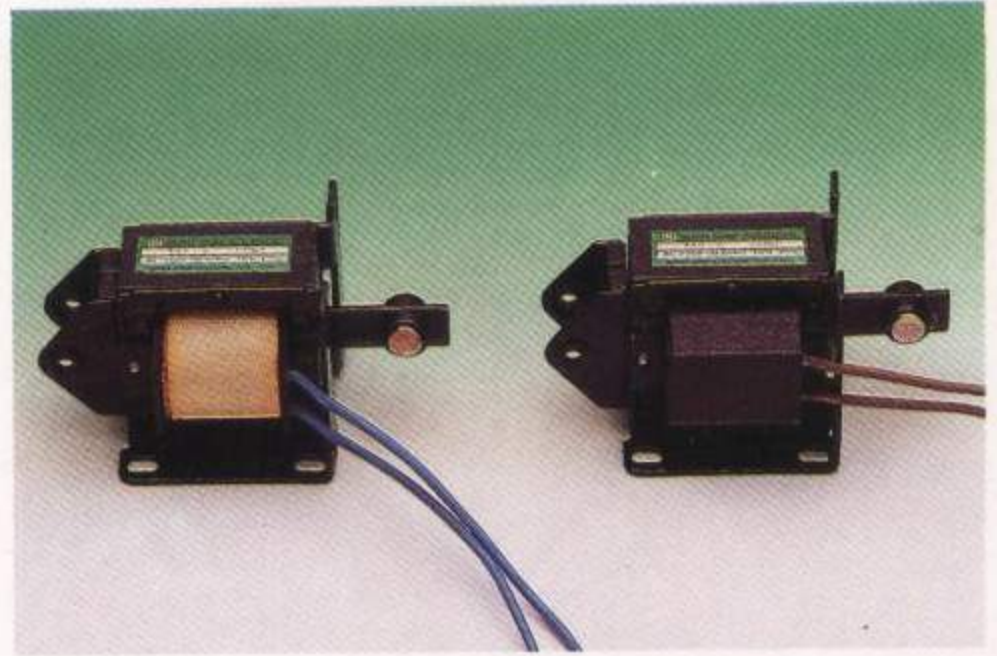


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	2.6A	0.38A	1kg / 15 ^m _m
220V	1.3A	0.2A	

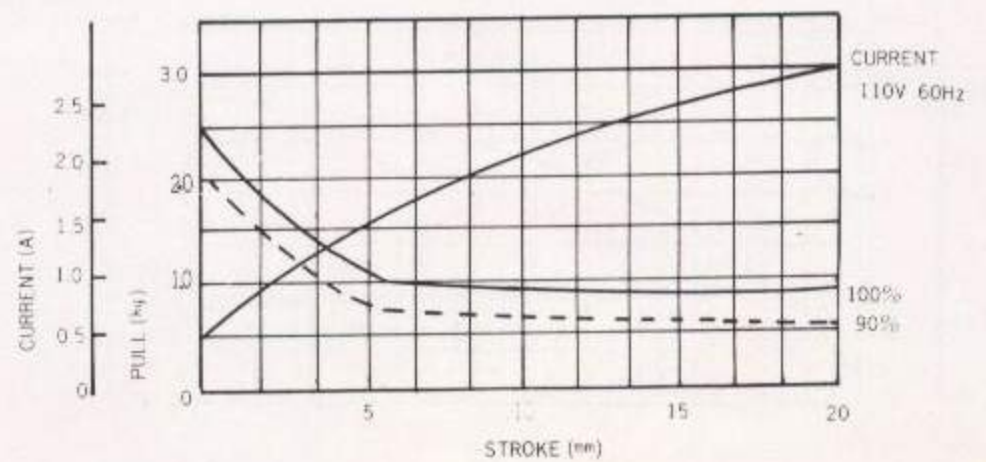



TAS-10

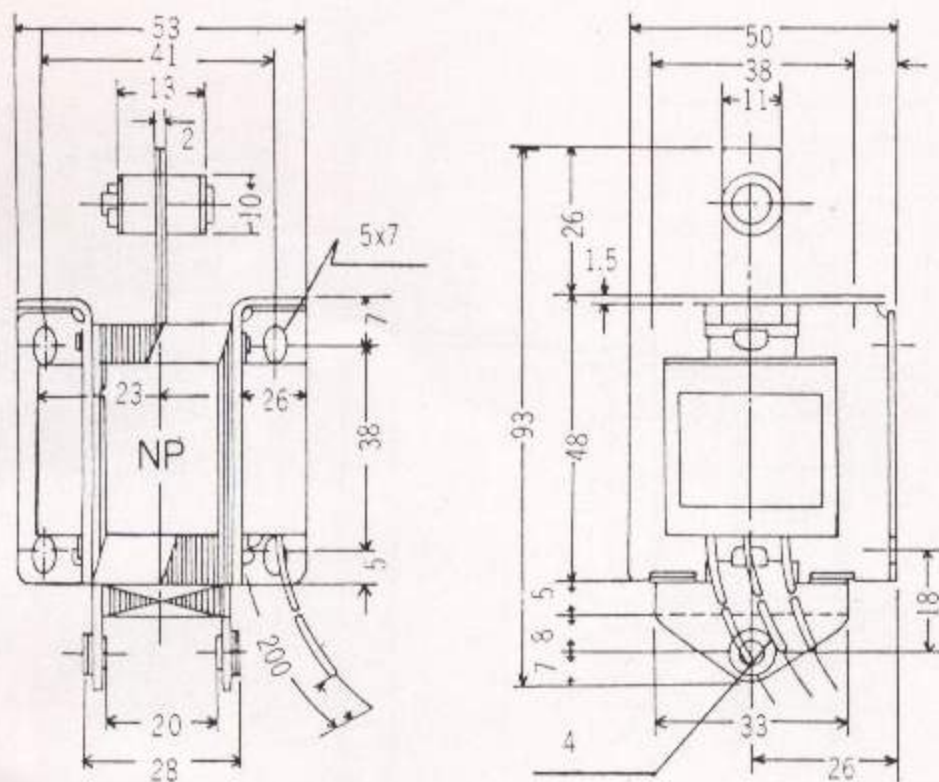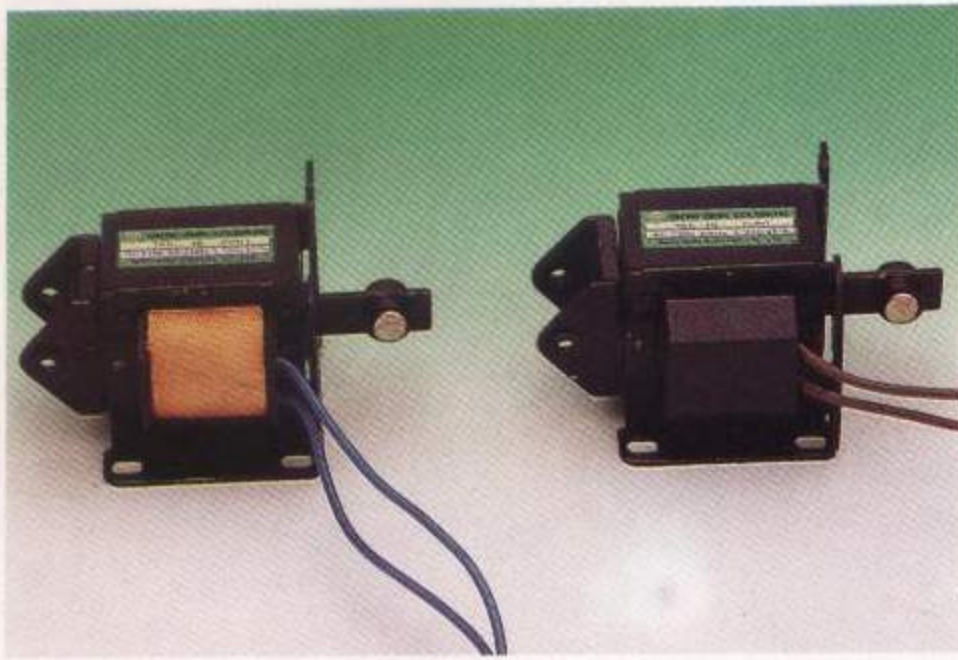


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	3.2A	0.36A	1.5kg / 15 ^m m
220V	1.6A	0.18A	

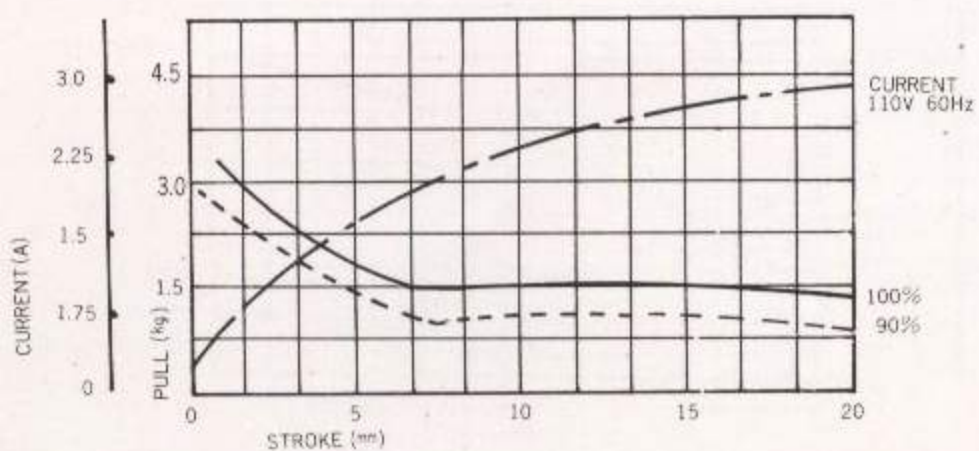


TAS-15

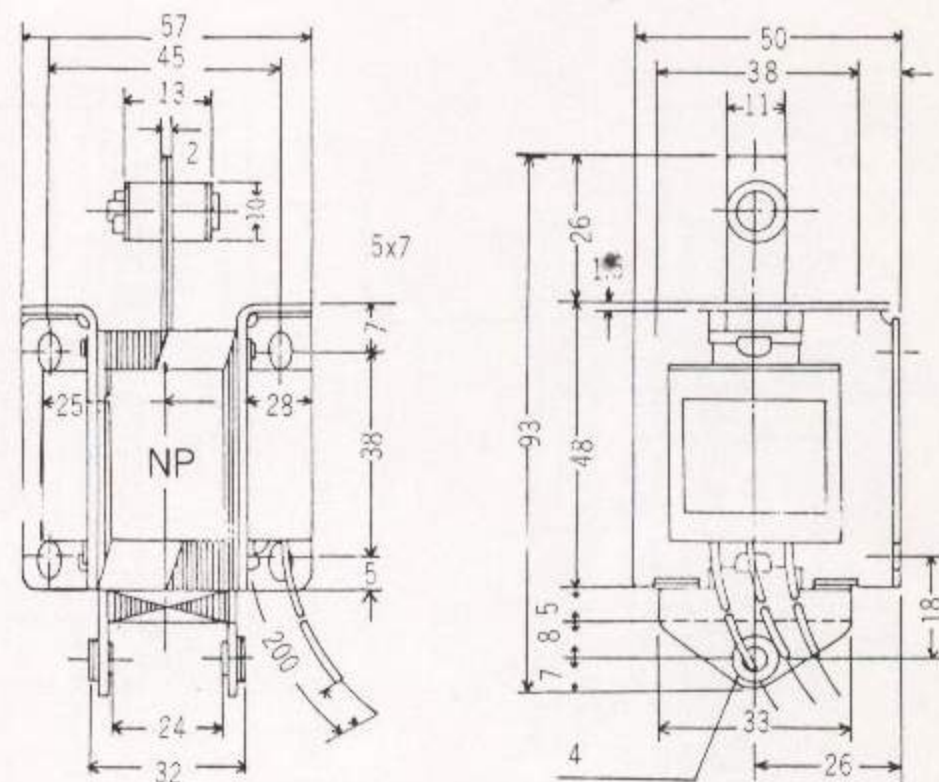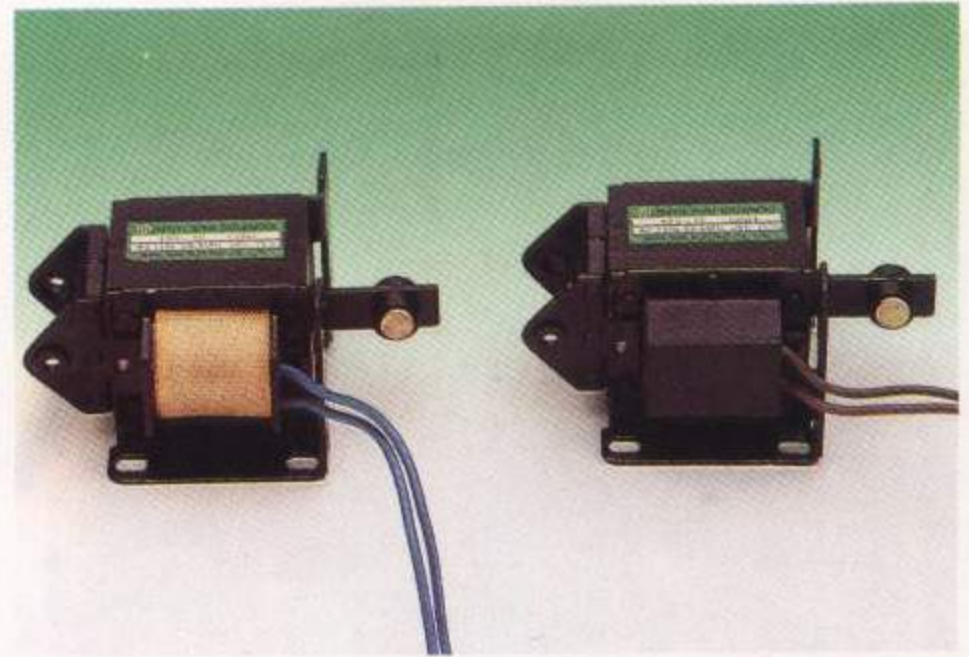




電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	4.0A	0.46A	2kg / 15 ^m m
220V	2.0A	0.23A	

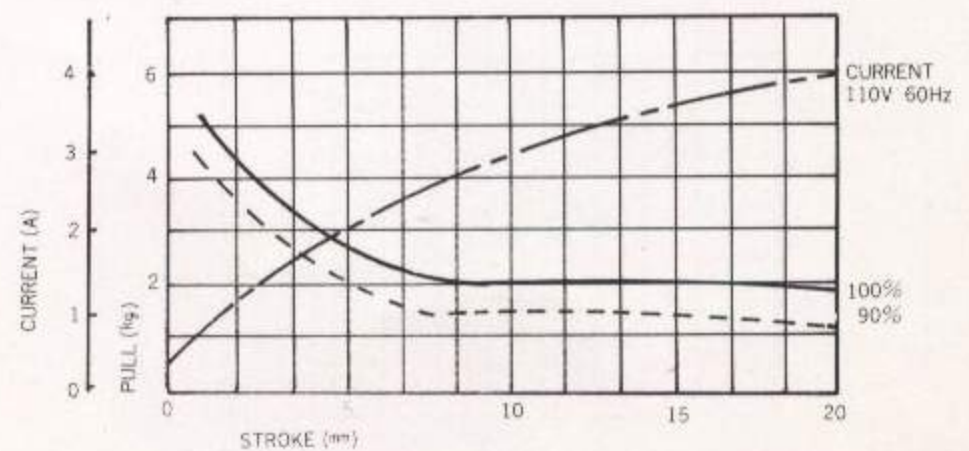

TASS-20


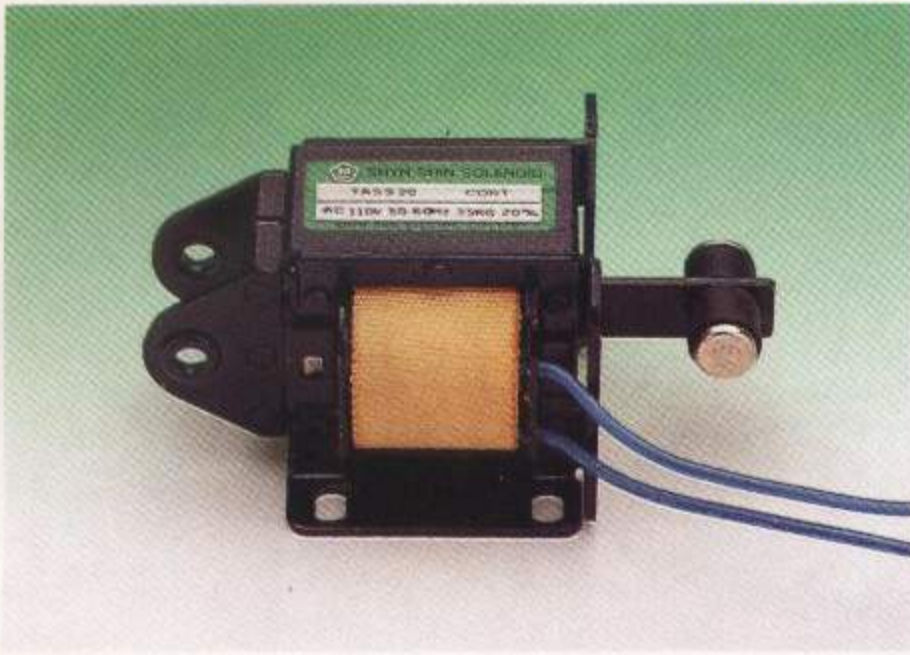


TAS-20

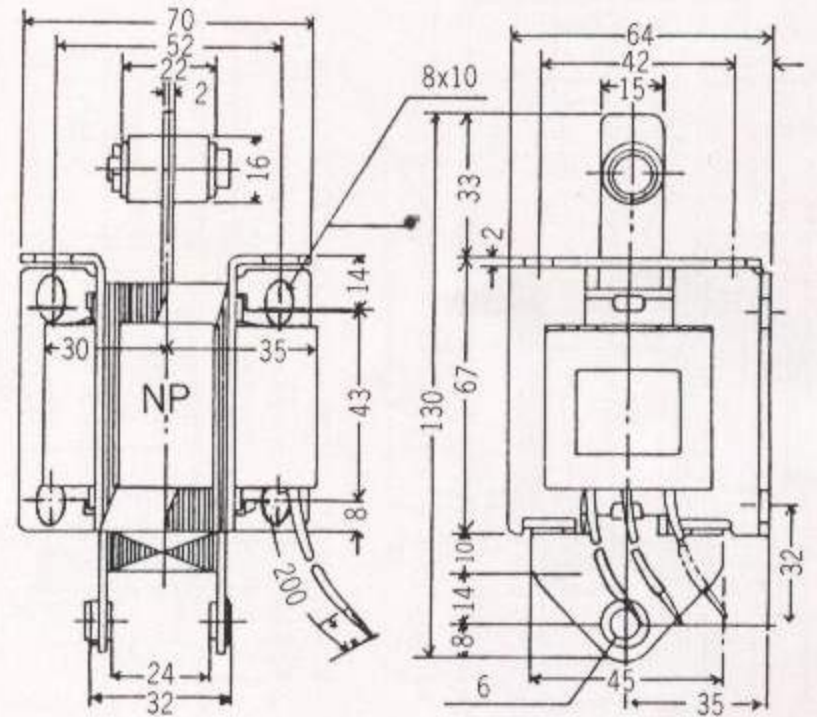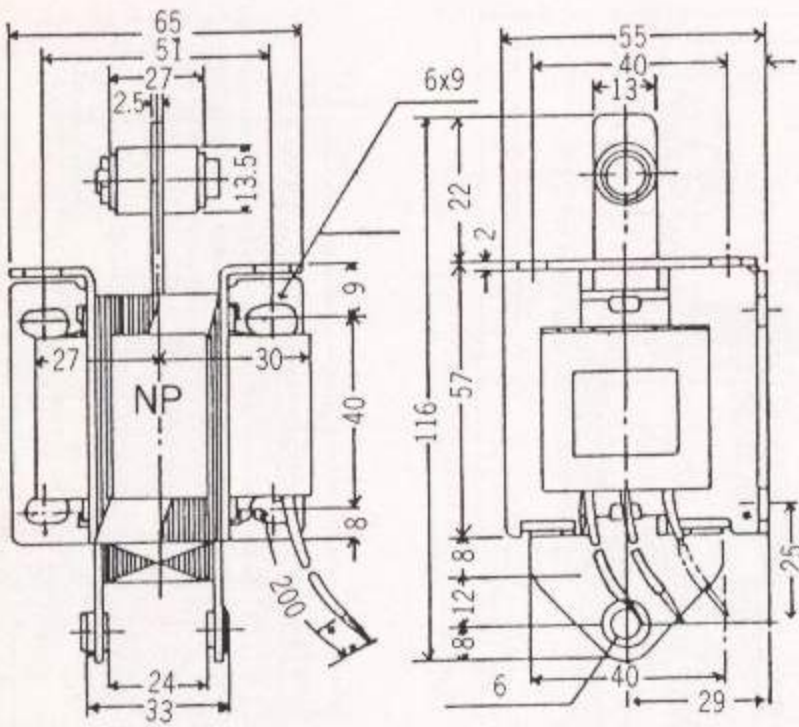
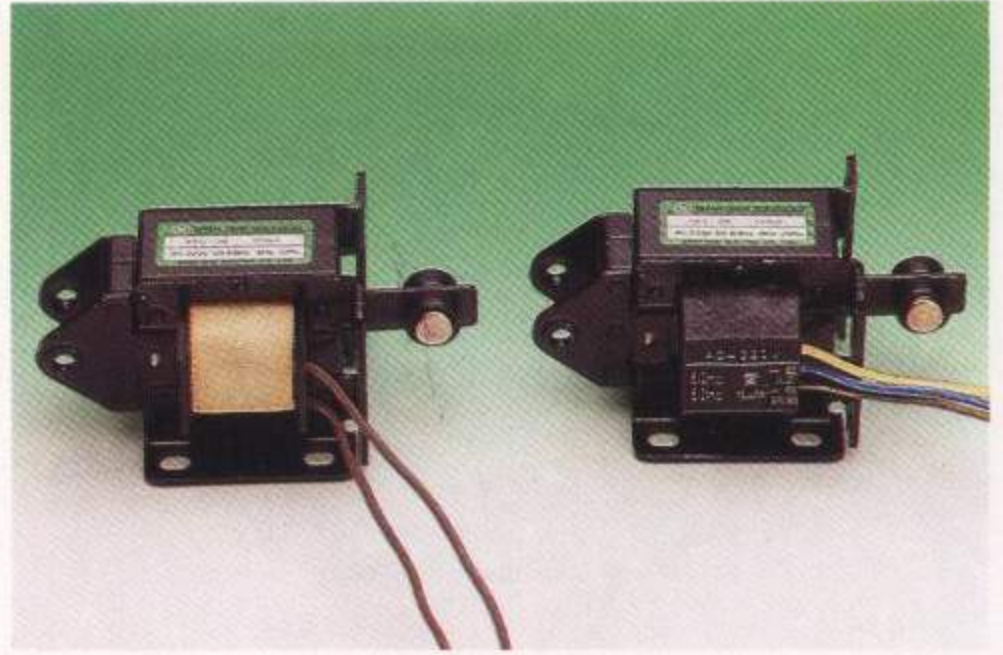


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	8.8A	0.76A	3.5kg/20 ^m _m
220V	4.4A	0.38A	


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	8.4A	0.74A	3kg/20 ^m _m
220V	4.2A	0.37A	

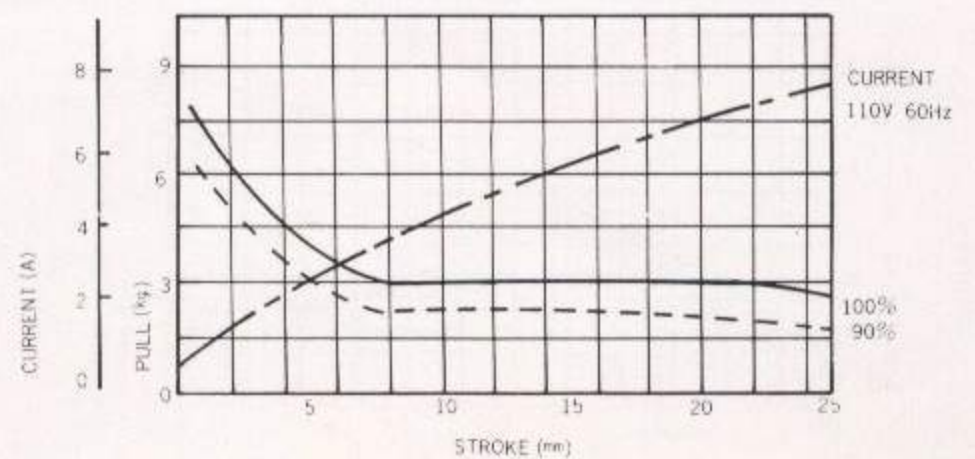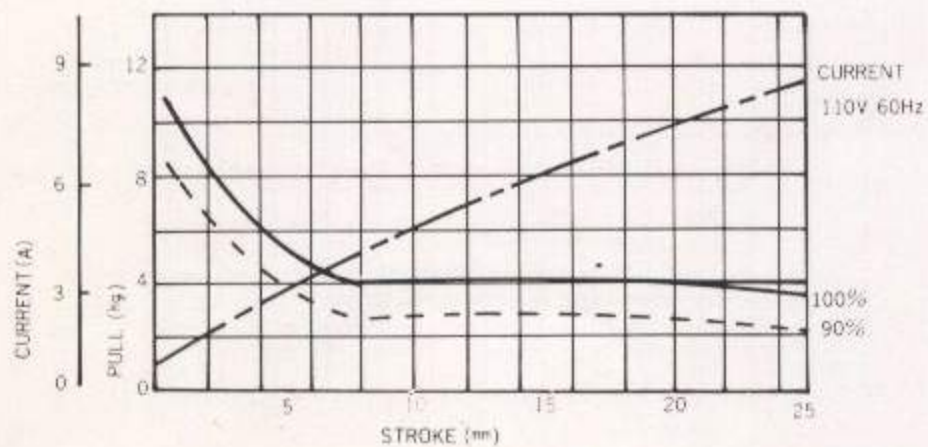



TAS-25

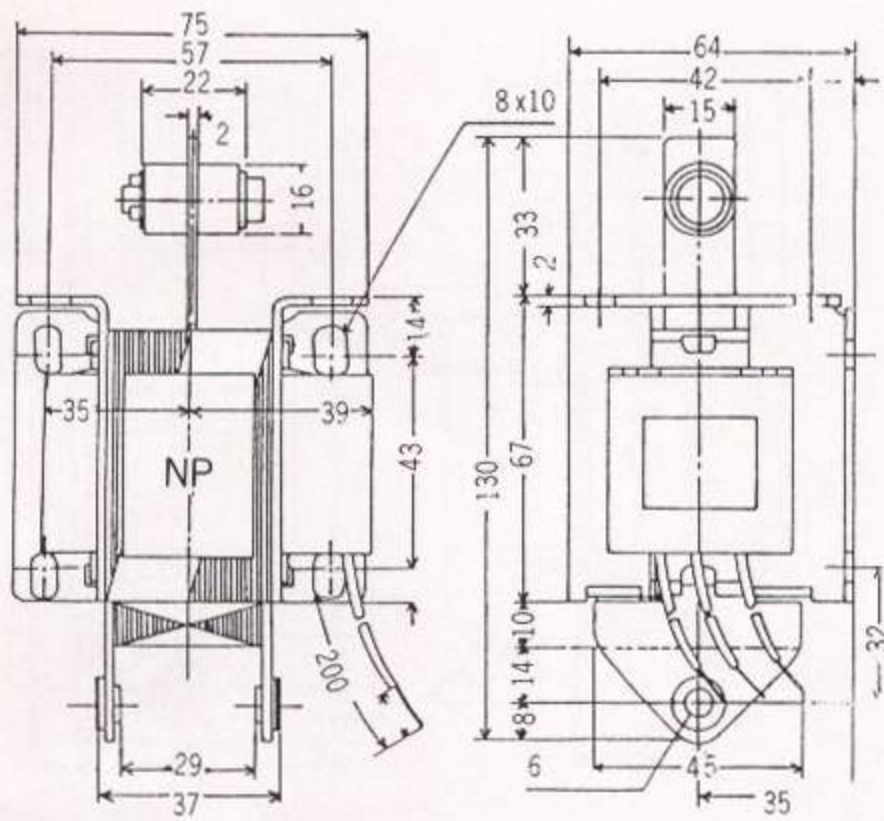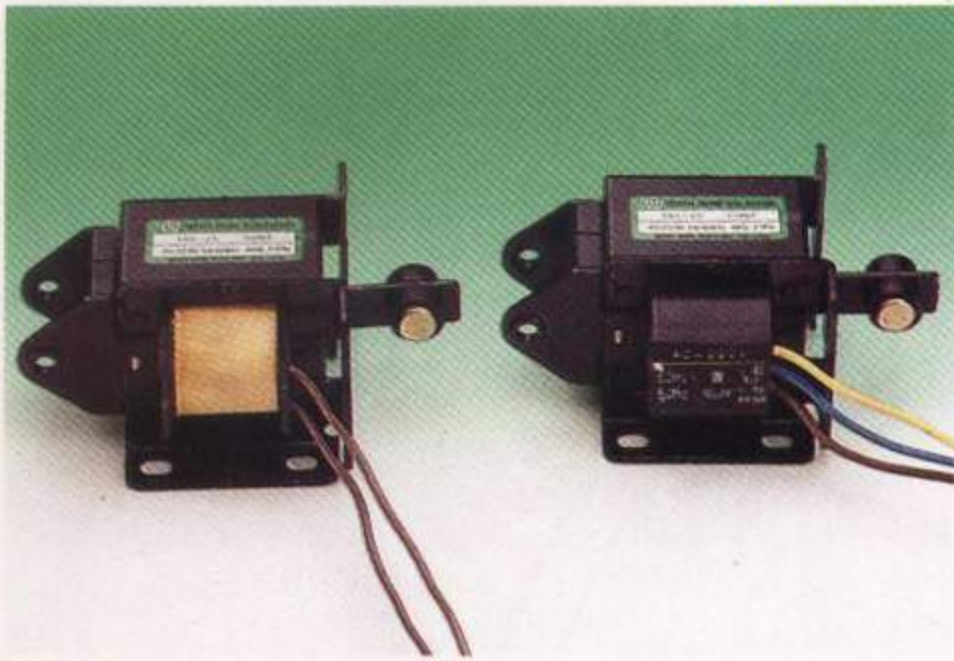


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	9.0A	0.8A	4kg / 20mm
220V	4.5A	0.4A	

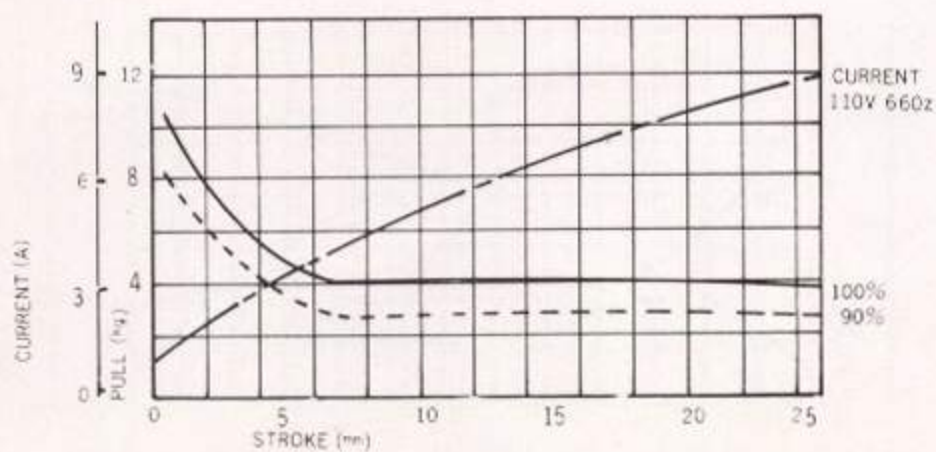


TAS-30

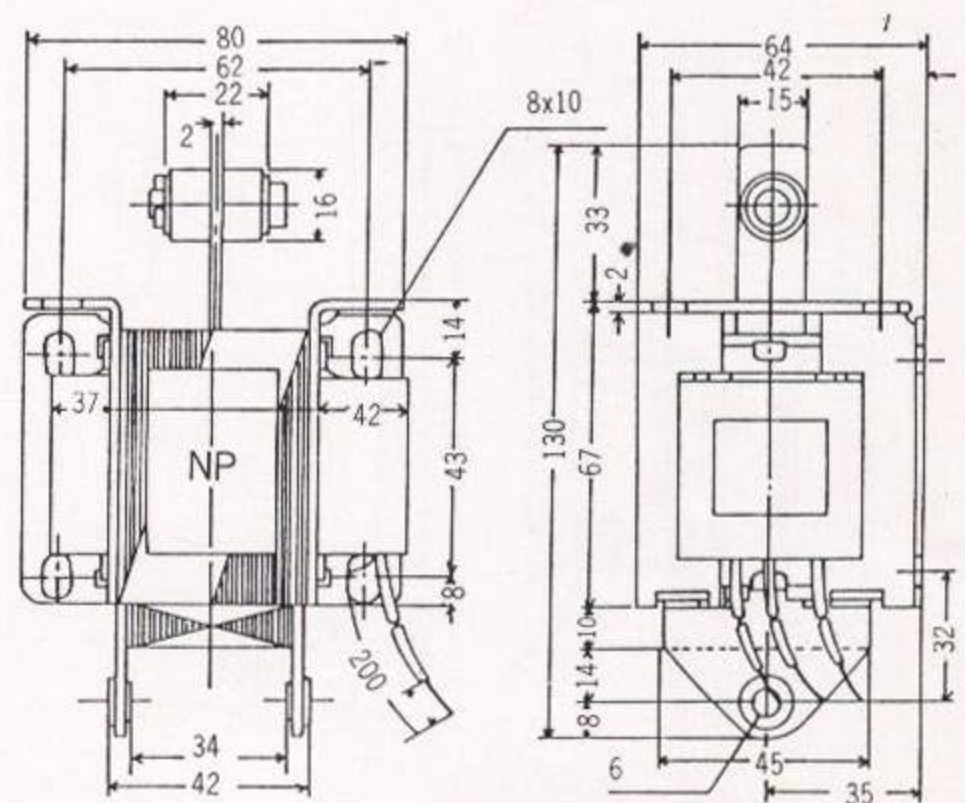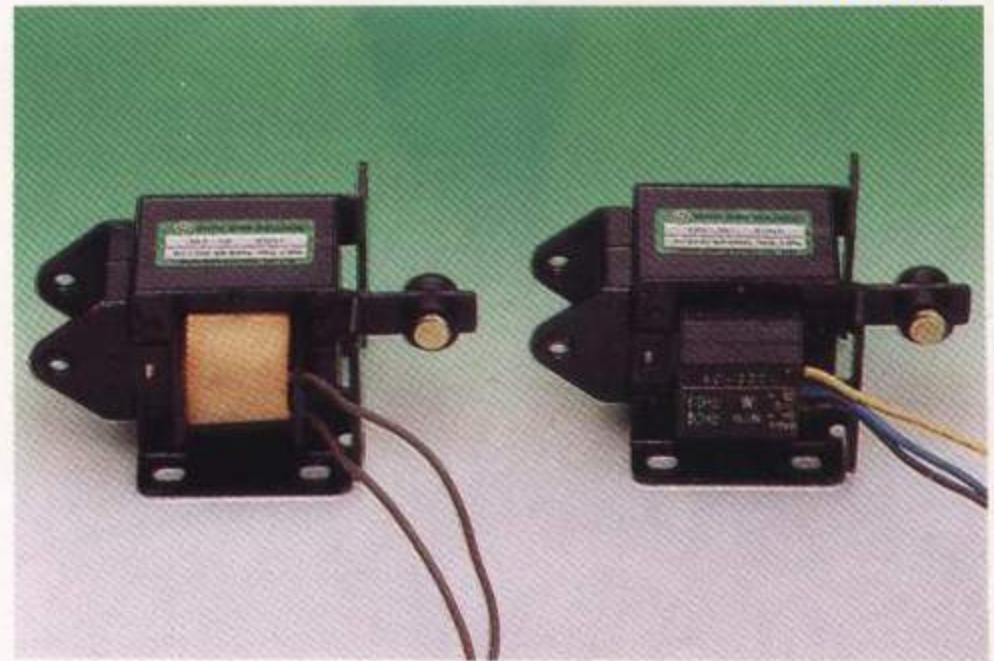




電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	11.0A	0.94A	5kg / 20mm
220V	5.5A	0.48A	

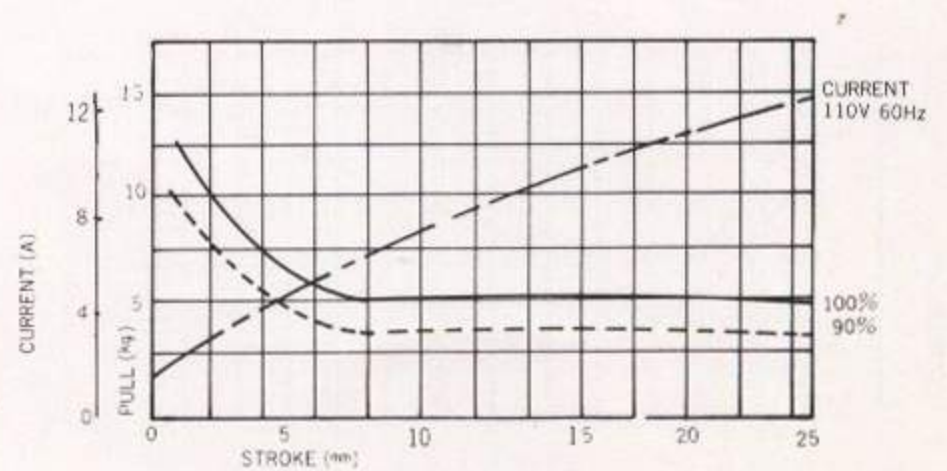

TAS-35


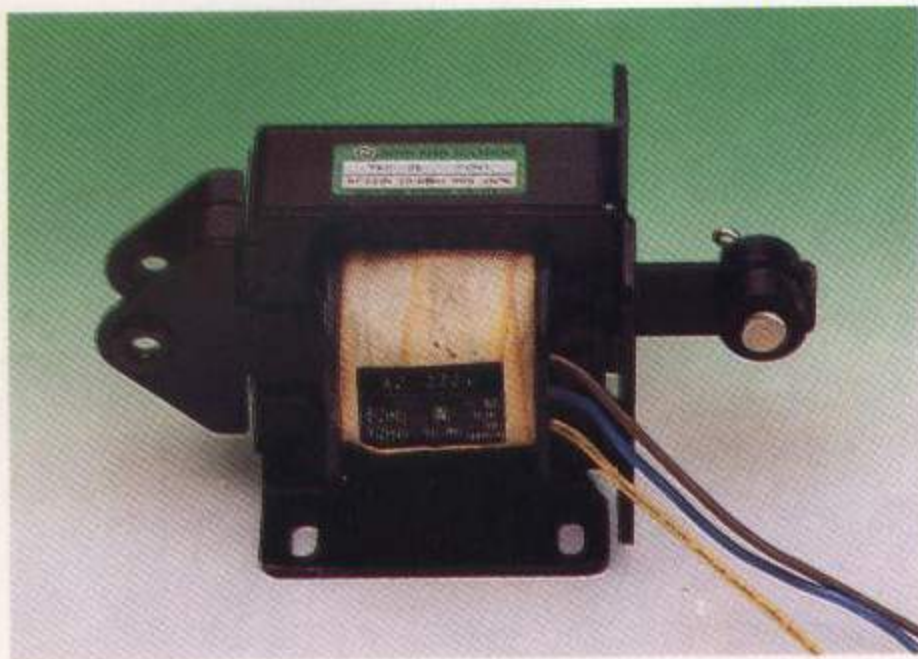


TAS-40

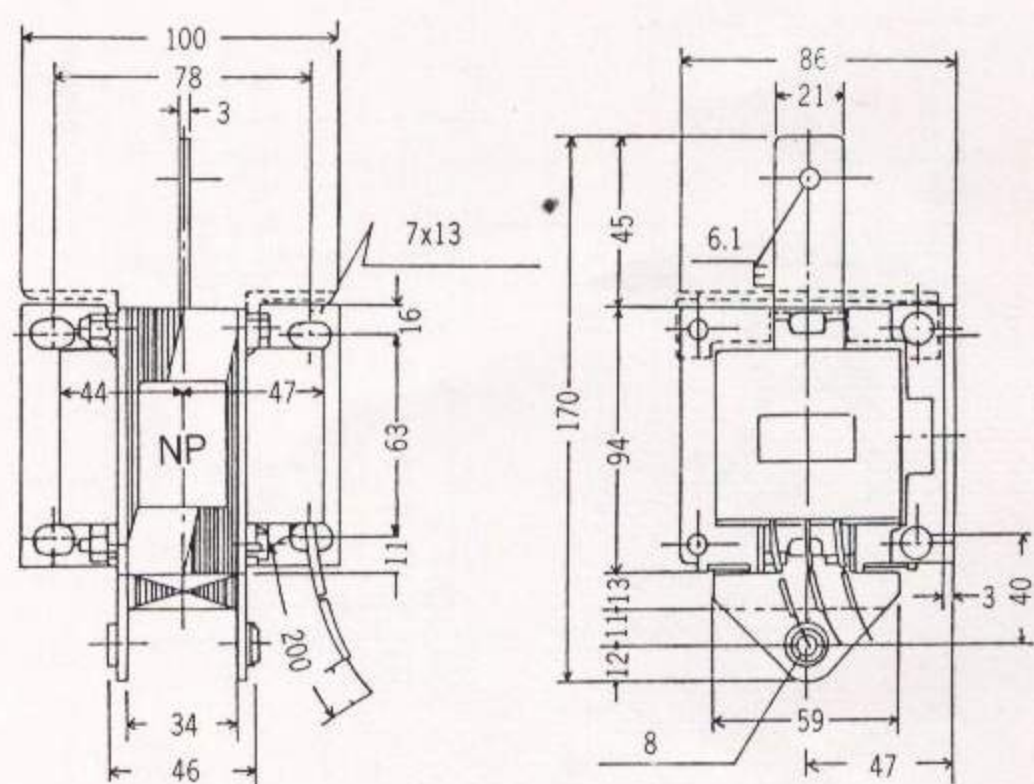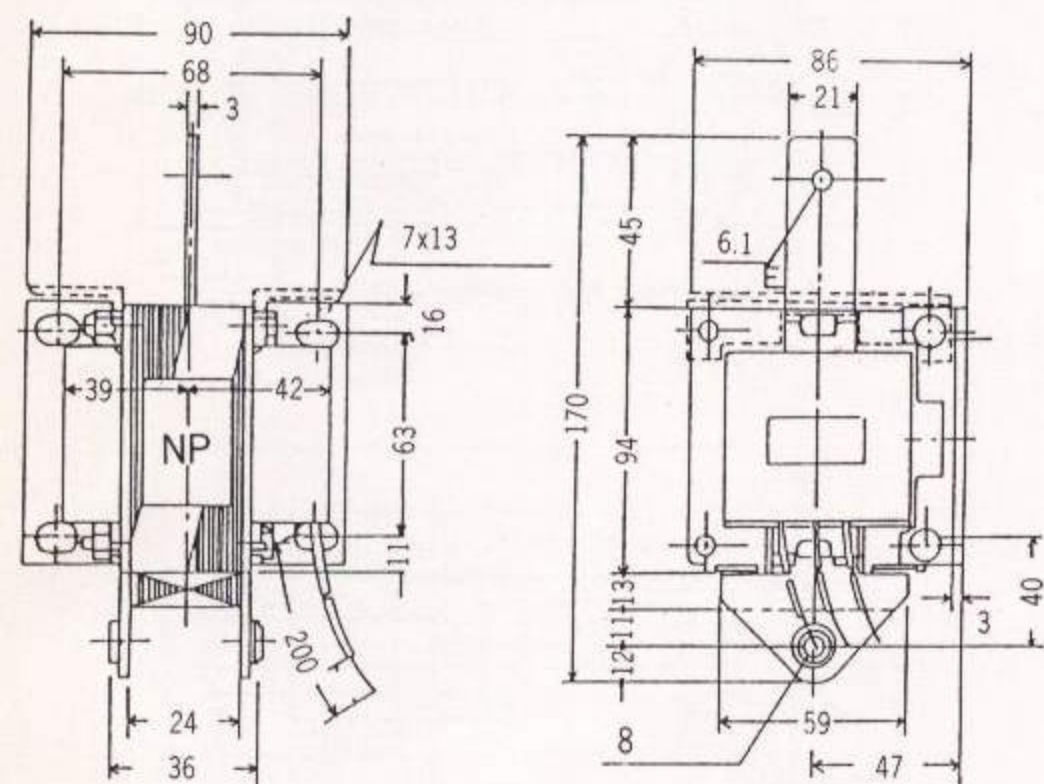
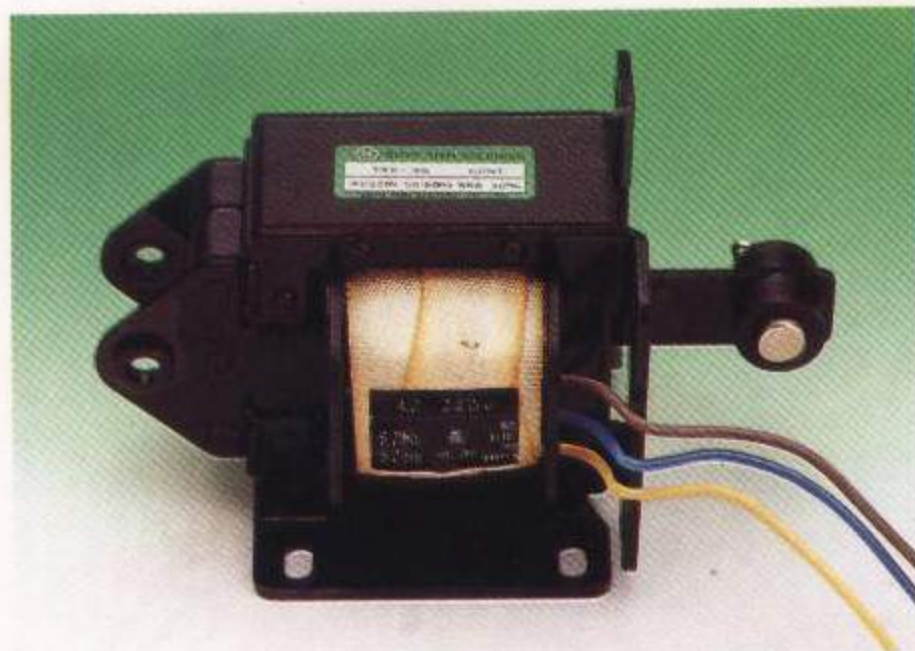


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	22.0A	1.45A	5kg / 30 ^m _m
220V	11.0A	0.75A	


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	25.0A	1.7A	6kg / 30 ^m _m
220V	13.0A	0.86A	

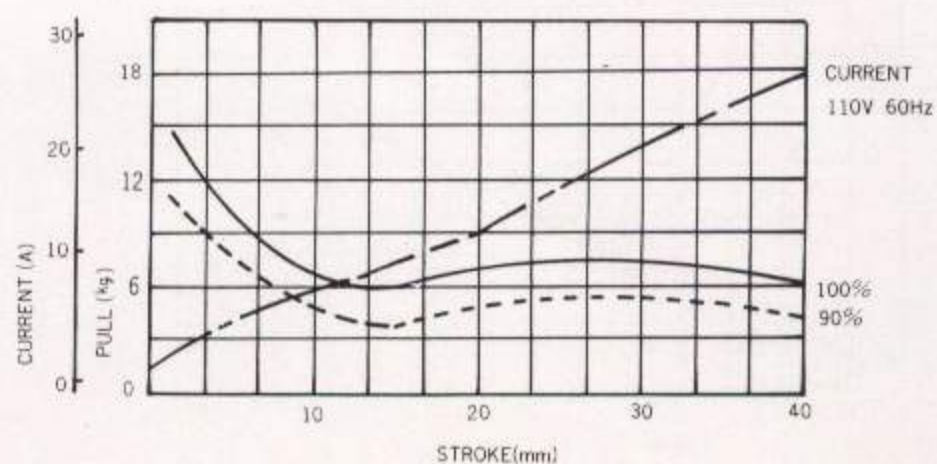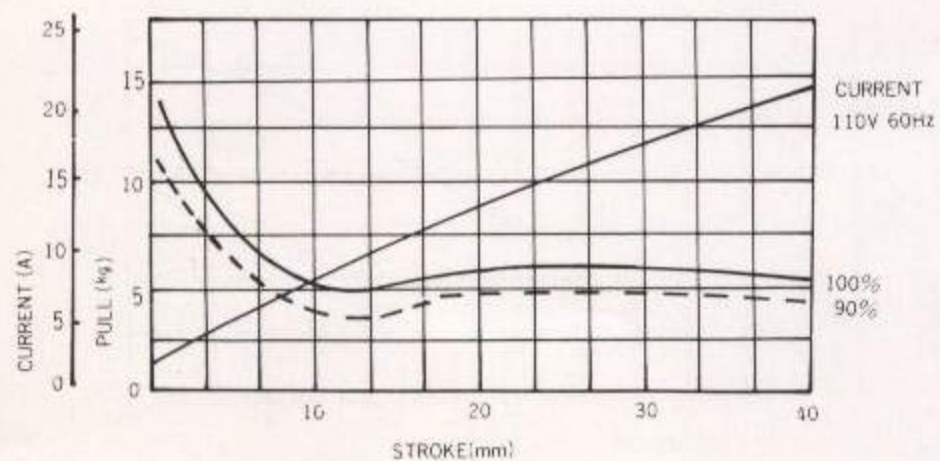



TAS-45

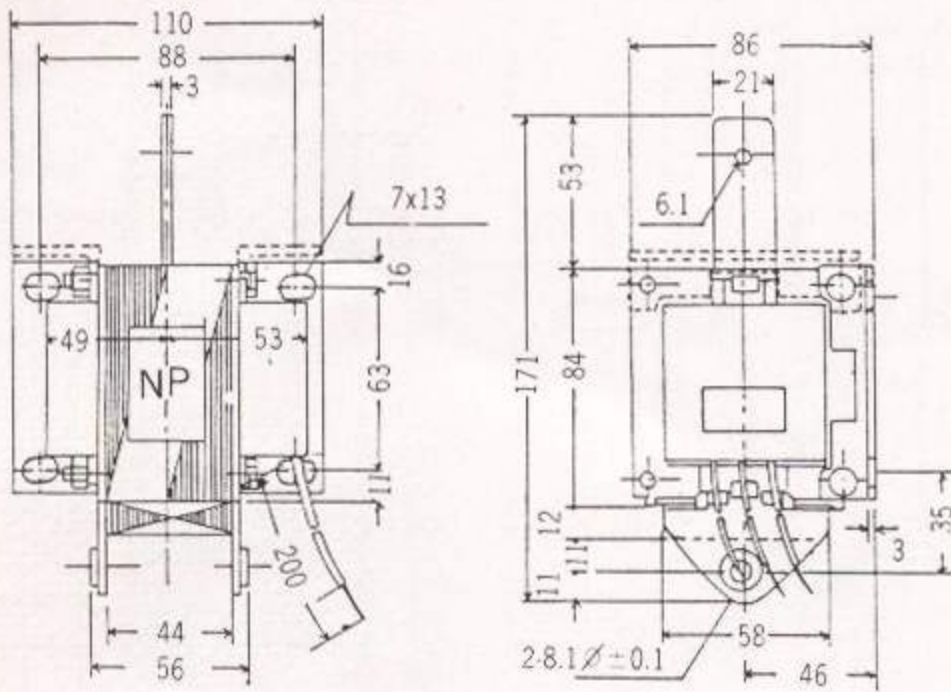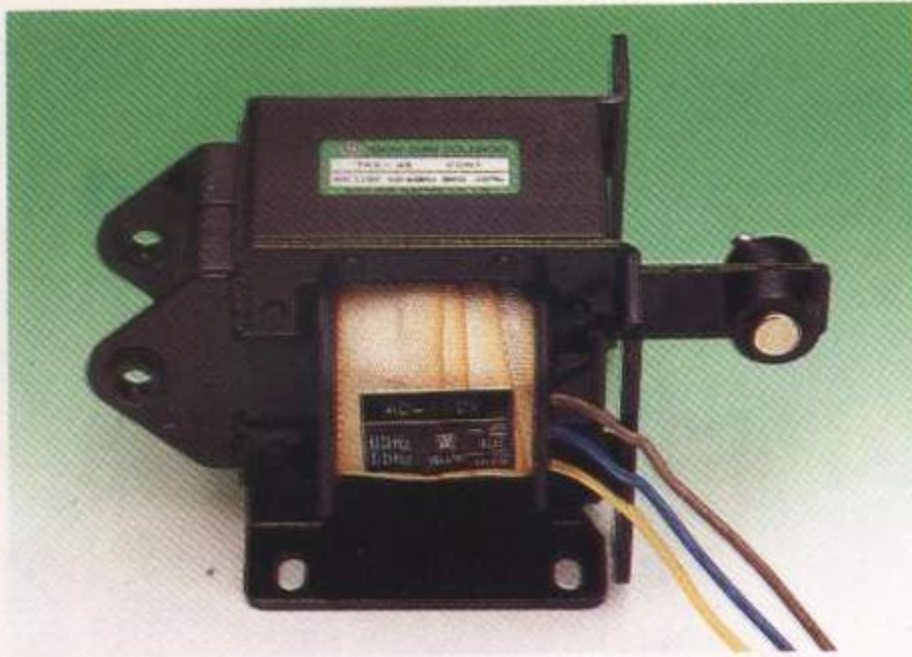


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	27.6A	1.8A	8kg / 30 ^{mm}
220V	13.5A	0.9A	

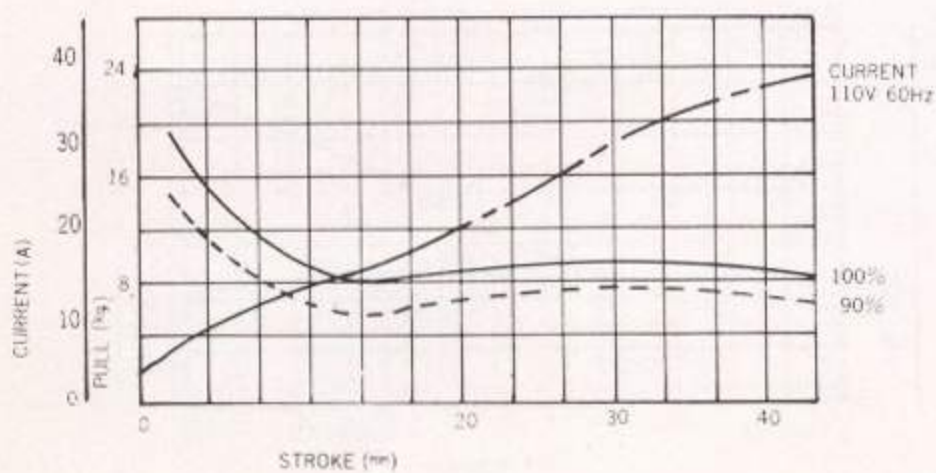




TAS-50

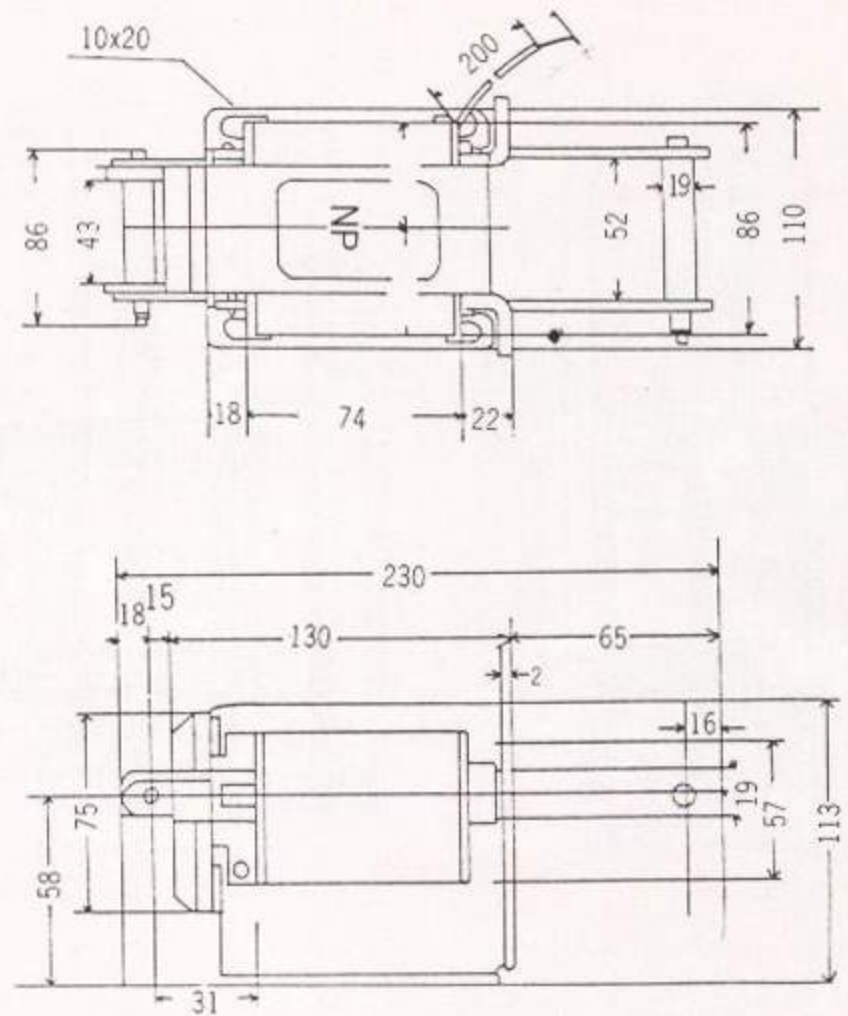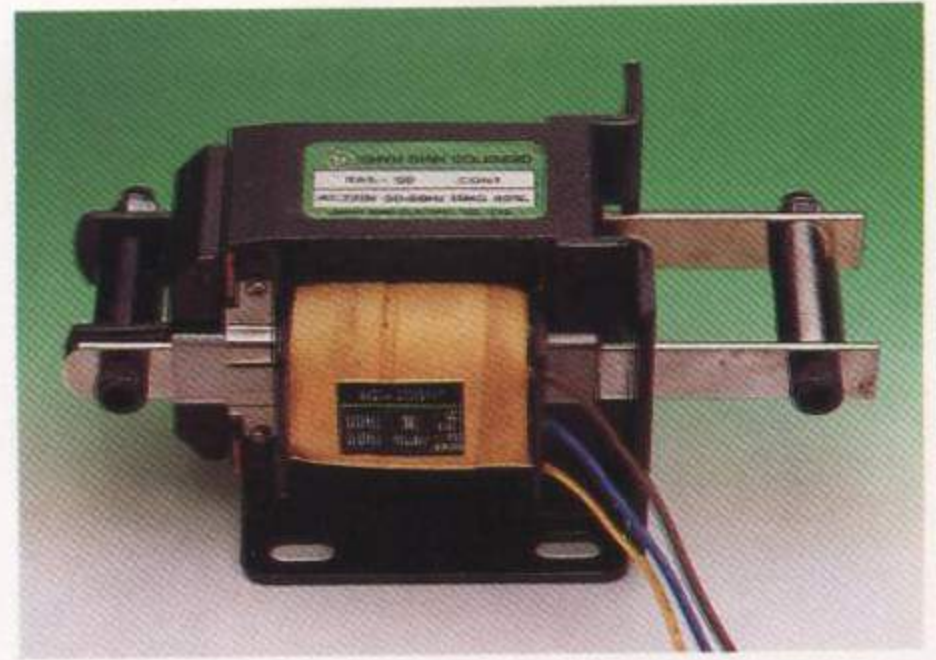


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	50.0A	3.2A	10kg / 40 ^{mm}
220V	25.0A	1.6A	

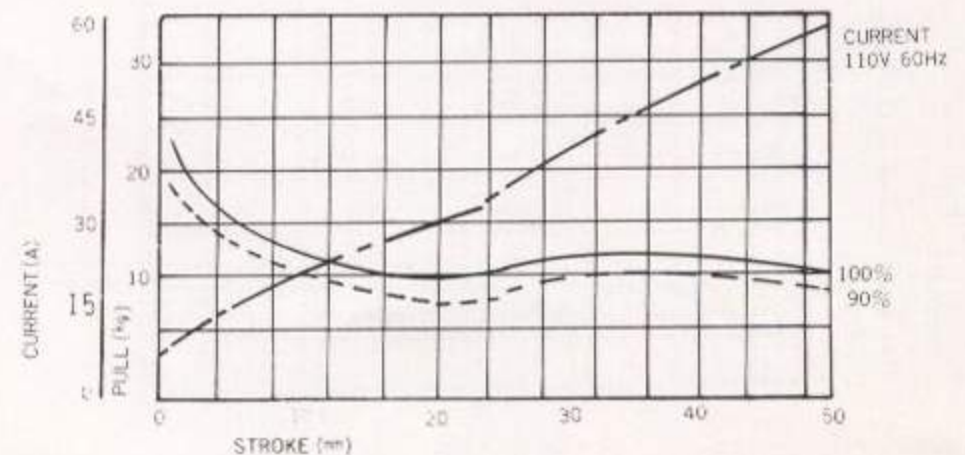




TAS-10A

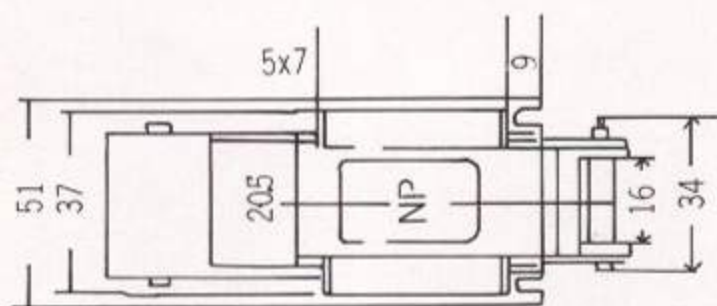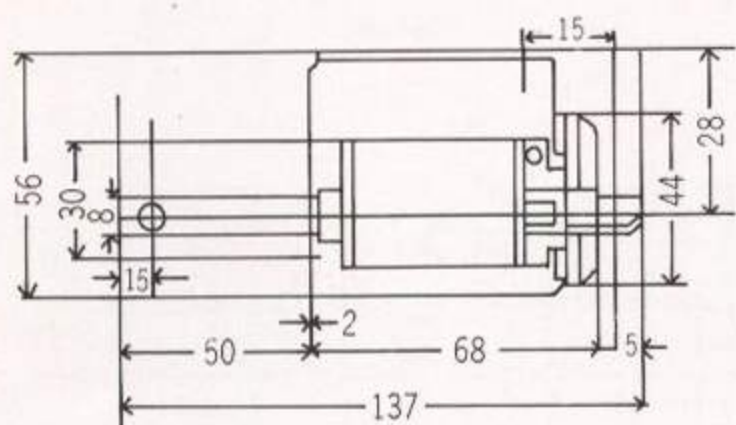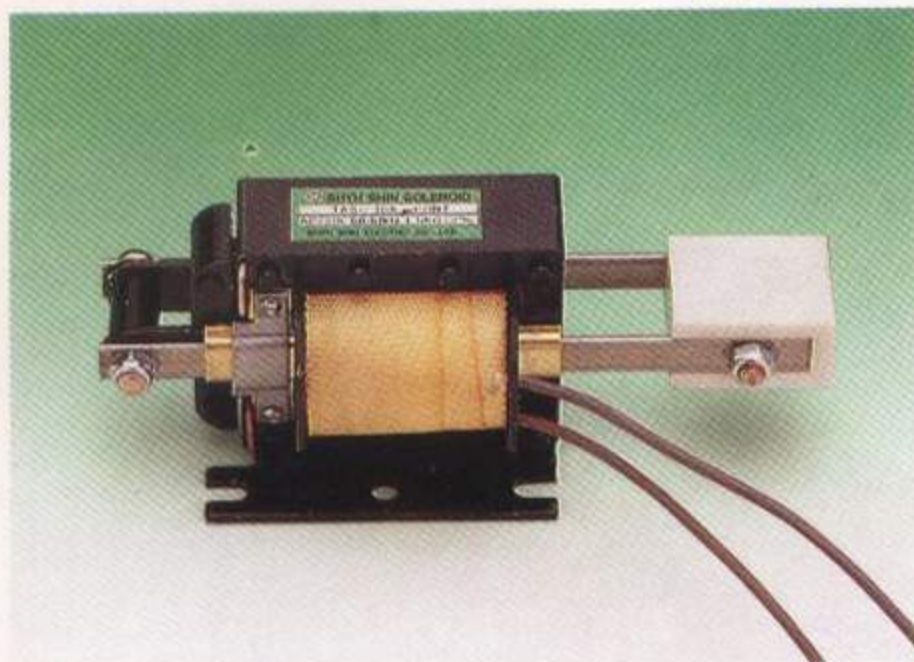


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	4.6A	0.5A	1.5kg / 22 ^m m
220V	2.3A	0.25A	

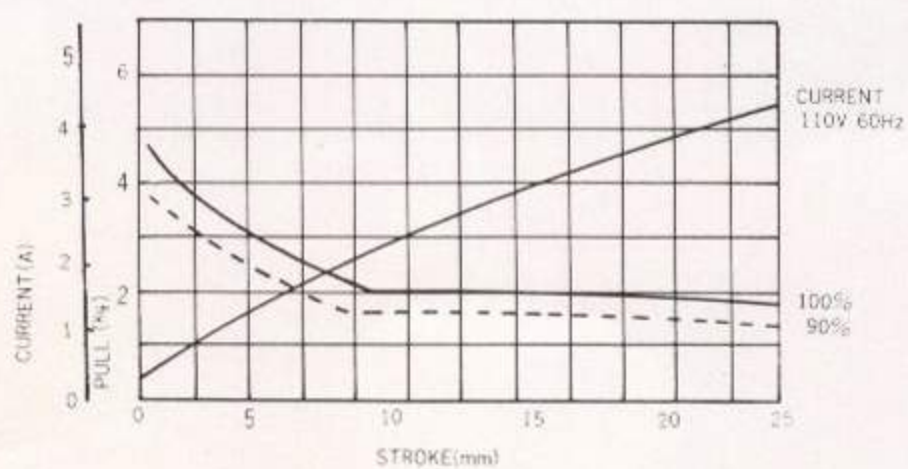




TAS-20A

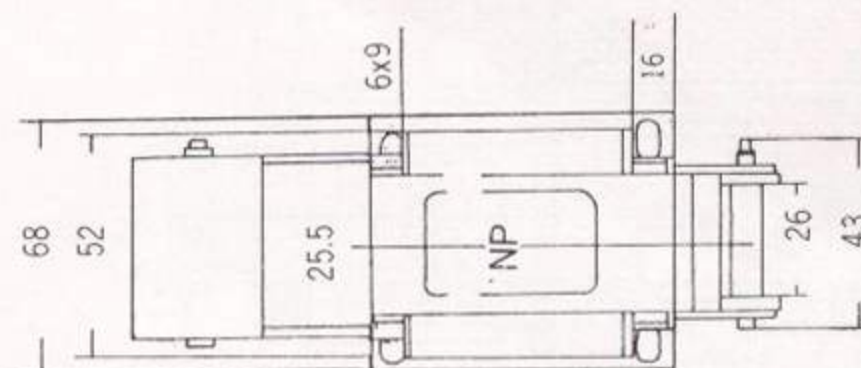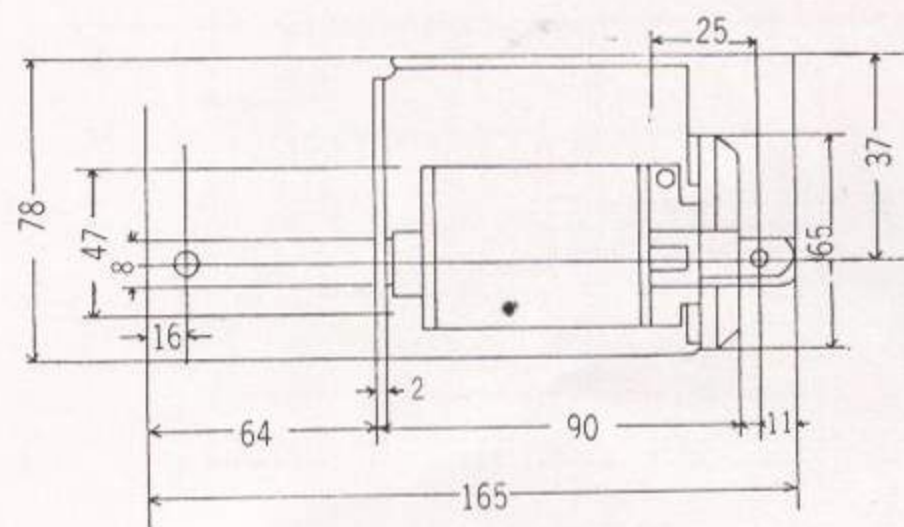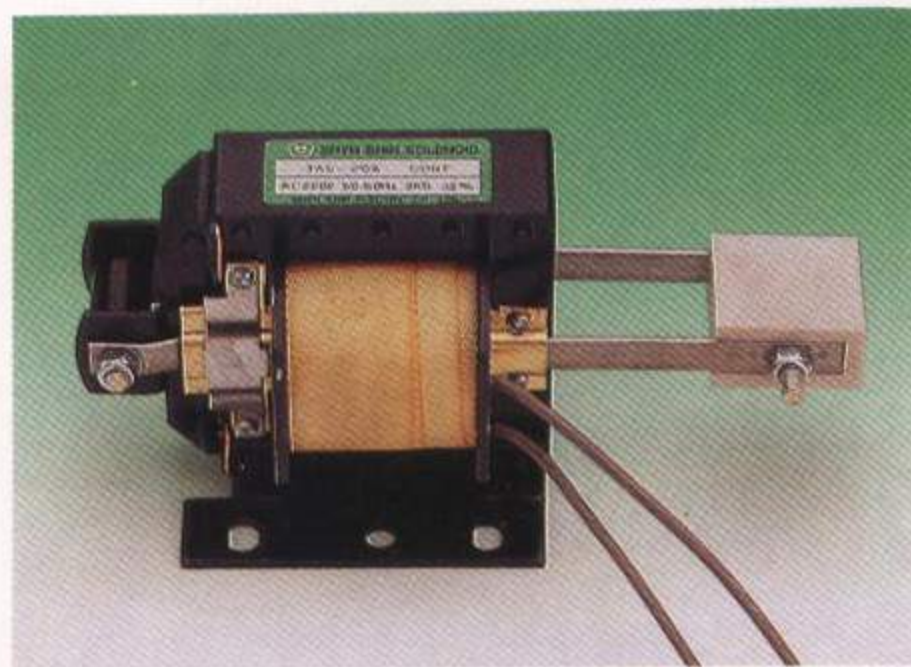

電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	8.4A	0.74A	3kg / 32 ^m m
220V	4.2A	0.37A	



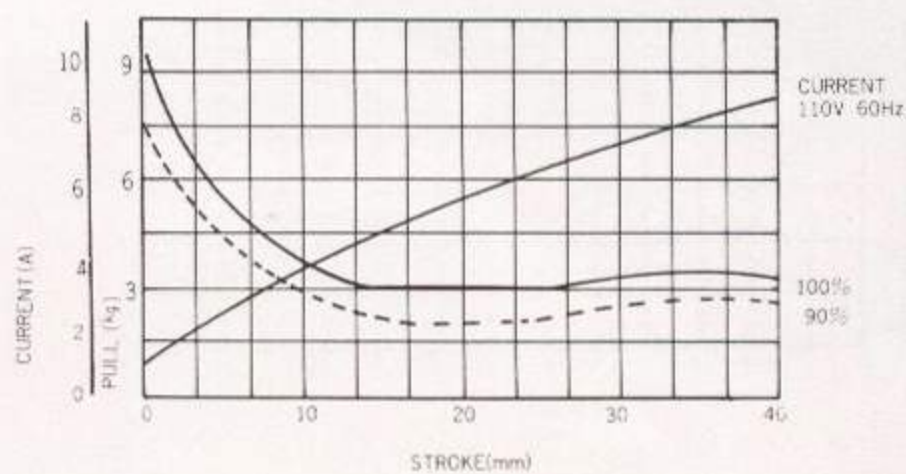


TAS-30A

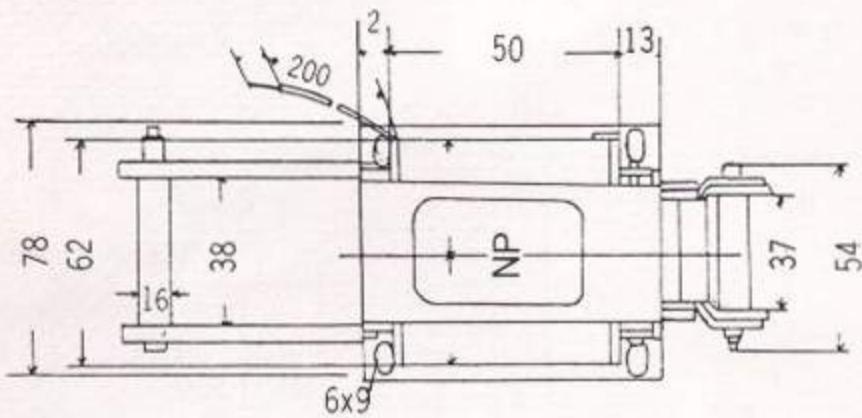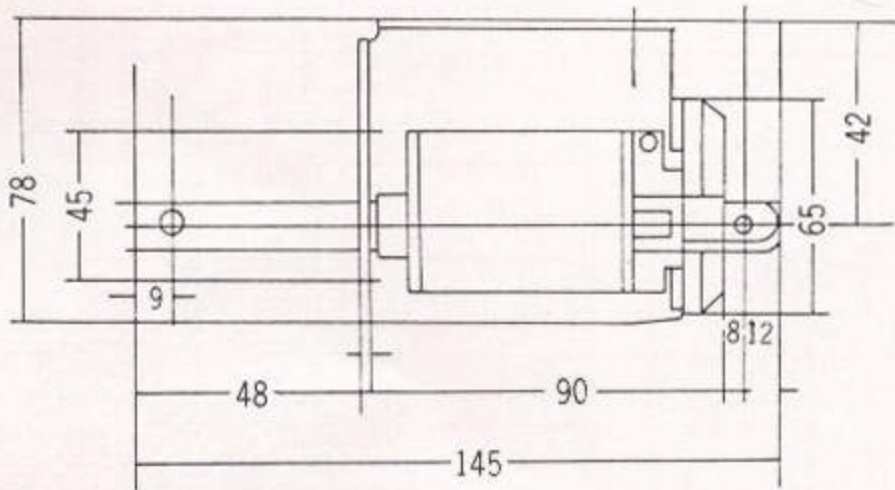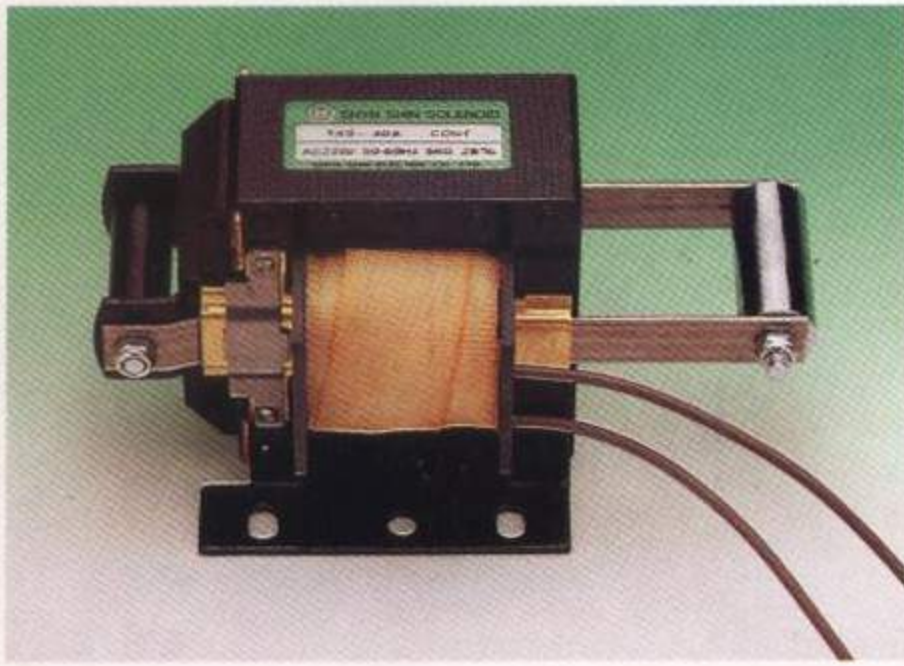


電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	18A	1.2A	5kg / 28 ^m m
220V	9A	0.6A	


TAU-03

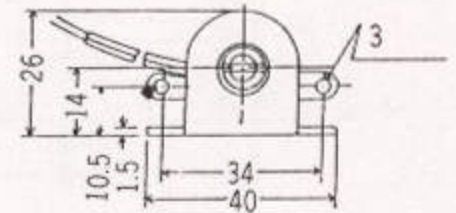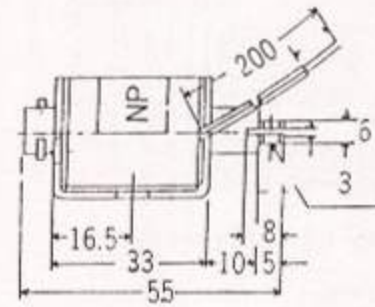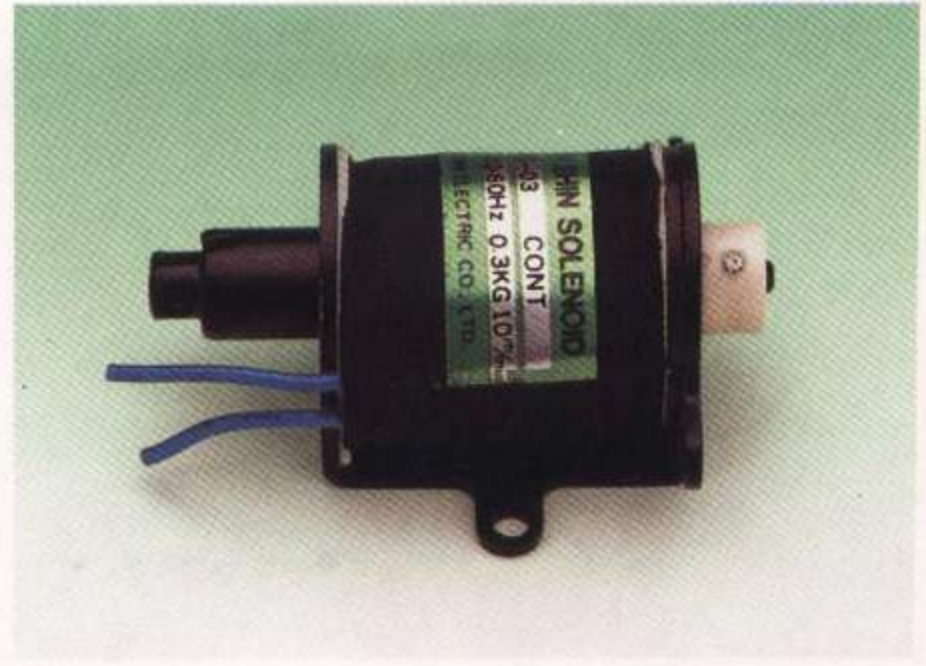





電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (AC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V	1.0A	0.3A	0.3kg / 10 ^m m
220V	0.5A	0.15A	

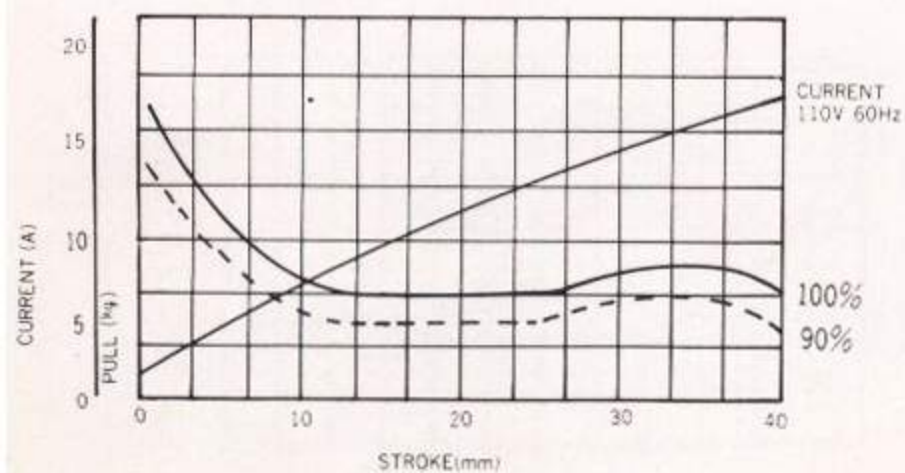

TAU-20

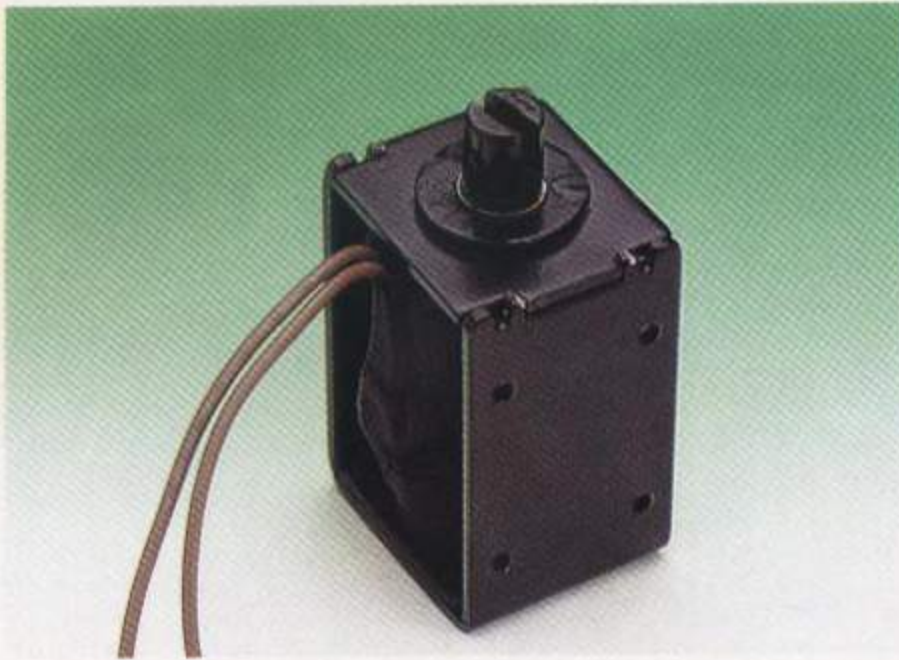

TAU-30

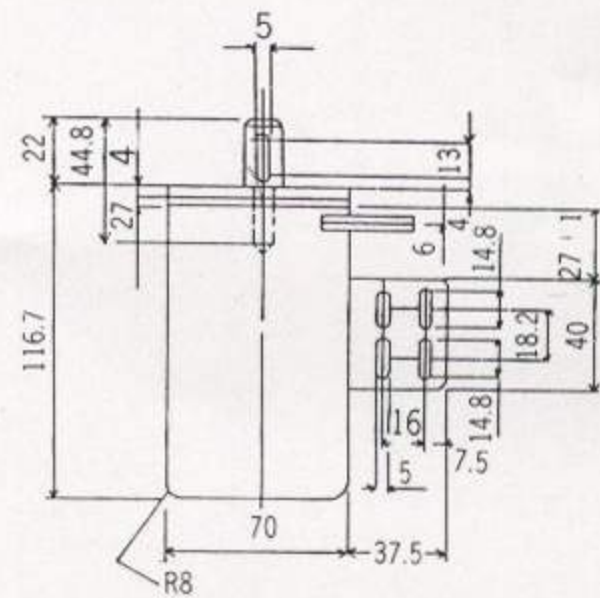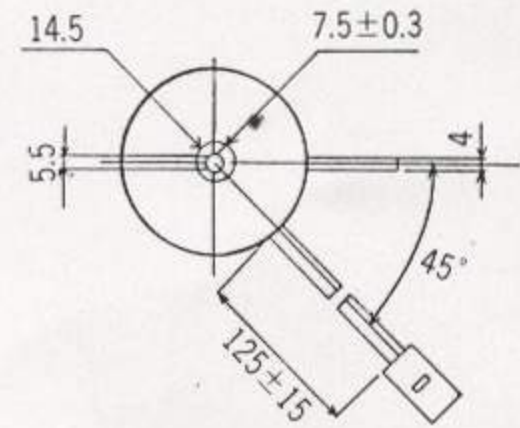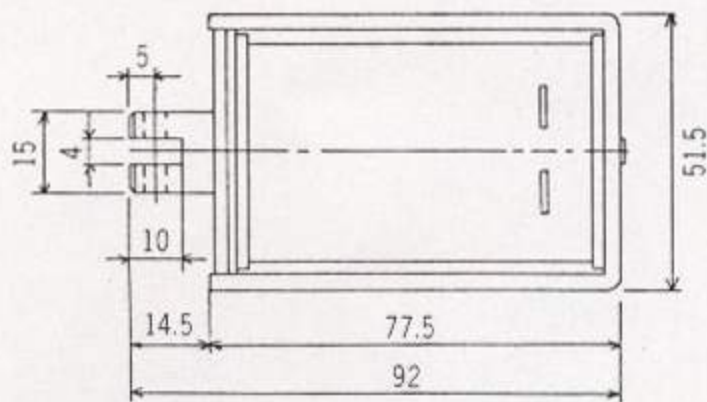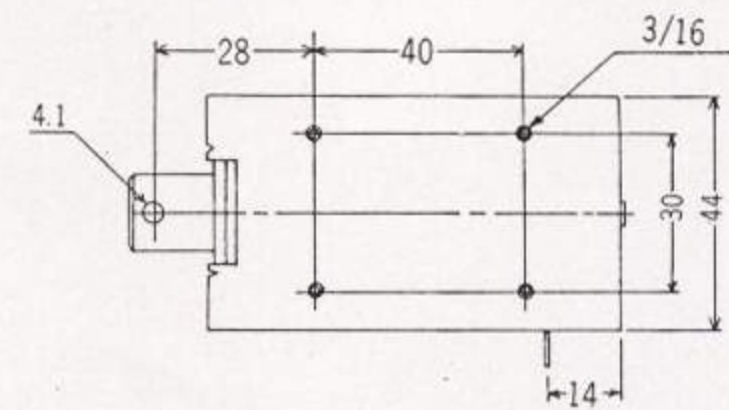

電 壓	流入電流	維持電流	額定拉/ 衝程
Voltage (DC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V			3kg/20 ^m _m
220V			

電 壓	流入電流	維持電流	額定拉力/衝程
Voltage (DC)	Inrush Current	Holding Current	Rated Pull Rated Stroke
110V			5kg/20 ^m _m
220V			